



FORUM
LIGHTING SOLUTIONS

FORUM
LIGHTING SOLUTIONS



CONTENTS

ZINK

OUTDOOR & SENSORS

Wall/Lantern
Ground/Deck Lights
Post/Wall Lights
Festoon Light
Deck Light
Door Number
Security & Floodlights
Work Lights
Outdoor Heating
Switches/Sockets
Sensors

ZINK

SOLAR

Post/Lantern
Ground
Wall Lights
PIR Wall Lights
Security & Floodlights
Spike Lights
Deck Lighting
Festoon

COAST

OUTDOOR

Post Lights
Lanterns
Bulkheads
Wall
Guide Lights
Ground/Spike
Security & Floodlights

ELECTRALITE

COMMERCIAL

LED Strip
LED Strip Accessories
Under Cabinet
LED Battens
T-Grid Lighting
Recessed/Downlights

SPA

BATHROOM

Ceiling/Wall
Spotlights
Flush
Recessed
Wall
Mirrors
Smart Toilets

SPA PRO

PREMIUM

Collections

CULINA

KITCHEN

Under Cabinet
Kinetic Switching
Konect Plug + Play
Sockets/QI Charging
Track Lighting
Plinth
LED Battens

INLIGHT

INDOOR & LED LAMPS

Plaster Lights
Spotlights
Recessed/Downlights
Picture Light
Task Lighting
Cable Sets
Shades
LED Lamps

STANLEY

SITE LIGHTING

Security & Floodlights
Torches
Portable
Festoon

INFO

Marketing
Lighting Terms
Colour Temp Guide
IP Rating
Bathroom Zoning
Index




OUTDOOR

Domestic external lighting in both modern and traditional designs. Including ZINK Radiant Heaters, suitable for domestic or commercial applications are extremely efficient and effective. We also offer a range of LED compatible PIR, photocell and microwave sensors.


WALL/LANTERN	5-61
POST/WALL LIGHTS	62-68
GROUND/DECK LIGHTS	69-73
FESTOON	74
DECK LIGHTS	75-77
DOOR NUMBER	78-79
SECURITY & FLOODLIGHTS	80-85
WORK LIGHTS	86-87
OUTDOOR HEATING	114-137
SOCKETS/SWITCHES	138-139
SENSORS	140-149

NEW


IP54



- Solid brass construction
- Available in 2 finishes



Bronze



Brass

BRAC

Downlight

IP54
Rated

Class 1




0.49kg


Code	Description	Finish	Lamp	Dimensions
ZN-41101-BRNZ	Brac Downlight	Bronze	1 x 7W max LED GU10	W:72mm H:120mm Proj:85mm
ZN-41101-RBRS		Brass		

NEW


IP54



- Solid brass construction
- Available in 2 finishes



Bronze



Brass

BRAC

Up/Down Wall Light

IP54
Rated

Class 1




0.71kg

Code	Description	Finish	Lamp	Dimensions
ZN-41102-BRNZ	Brac Up/Down Wall Light	Bronze	2 x 7W max LED GU10	W:72mm H:180mm Proj:85mm
ZN-41102-RBRS		Brass		

NEW

IP44



- Die-cast aluminium construction
- Available in 2 finishes



Anthracite



Black

MORRO

Long Up/Down Wall Light



IP44
Rated



Class 1




0.88kg

Code	Description	Finish	Lamp	Dimensions
ZN-40001-BLK	Morro Long Up/Down Wall Light	Black	2 x 7W max LED GU10	W:75mm H:300mm Proj:110mm
ZN-40001-ANTH		Anthracite		

NEW
FOR
2023

IP54

460
Lumens



- Die-cast aluminium construction
- Wall mounted
- 9W LED
- K: 4000
- Lm: 460
- Lm/W: 51.1



BUDE


Coil LED Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-42066-BLK	Black	Bude Coil LED Wall Light	9W	4000k	460	51.1	H:280mm W:100mm Proj:103mm

NEW
FOR
2023

IP44



- Steel & glass construction



CHESIL

Wall Lantern




Code	Description	Finish	Lamp	Dimensions
ZN-42095-BLK	Chesil Wall Lantern	Black	1 x 10W max LED E27 GLS	W:320mm H:240mm Proj:380mm

NEW
FOR
2023

IP44



- Stainless steel construction
- Available in 2 finishes



Stainless Steel



Copper

BREAN

Up/Down Wall Light



IP44
Rated



Class 1




1.4kg

Code	Description	Finish	Lamp	Dimensions
ZN-42019-SST	Brean Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	W:75mm H:305mm Proj:112mm
ZN-42019-COP		Copper		

NEW
FOR
2023

IP44



- Aluminum & PC construction
- Available in 2 round or square




BEATA Downlight



Code	Description	Shape	Lamp	Dimensions	Weight
ZN-41099-GRYSMK	Beata Downlight	Round	1 x 10W max LED E27 GLS	W:85mm H:172mm Proj:118mm	0.448kg
ZN-41100-GRYSMK		Square		W:83mm H:165mm Proj:111mm	0.53kg

NEW
FOR
2023

IP44



- Aluminum & PC construction



BEATA Up/Down Wall Light




Code	Description	Finish	Lamp	Dimensions
ZN-41711-GRYSMK	Beata Up/Down Wall Light	Grey/Smoke	2 x 10W max LED E27 GLS	W:85mm H:330mm Proj:110mm

NEW
FOR
2023

IP54



- Die-cast aluminium, PC and glass construction
- Available with or without photocell sensor



EOS

Up/Down Wall Light



IP54
Rated



Class 1




0.84kg

Code	Description	Sensor	Lamp	Dimensions
ZN-32255-BLK	Eos Up/Down Wall Light	–	2 x 7W max LED GU10	W:80mm H:225mm Proj:110mm
ZN-35072-BLK	Eos Up/Down Wall Light w/	Photocell		





IP44



- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Comes in 6 different finishes
- PIR & Photocell versions available



LETO

Up/Down Wall Light




Available in 6 colour options

Code	Finish	Description	Lamp	Dimensions
ZN-2094I-SST	Stainless Steel	Leto Up/Down Wall Light	2 x 7W max LED GU10	H:160mm W:60mm Proj:110mm
ZN-2094I-POLSST	Polished Stainless			
ZN-2094I-BLK	Black			
ZN-2094I-WHT	White			
ZN-2094I-ANTH	Anthracite			
ZN-2094I-COP	Copper			

IP44

- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Adjustable lux, sensitivity and timer
- Up to 8m detection distance
- Comes in 4 different finishes



LETO

Up/Down Wall Light with PIR



PIR
Sensor



IP44
Rated



Class 1




0.8kg

Code	Finish	Description	Lamp	Dimensions
ZN-29179-SST	Stainless Steel	Leto Up/Down Wall Light with PIR	2 x 7W max LED GU10	H:215mm W:68mm Proj:107mm
ZN-29179-BLK	Black			
ZN-29179-ANTH	Anthracite			
ZN-29179-COP	Copper			

IP44

- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Photocell sensor
- Available in 2 finishes



LETO

Up/Down Wall Light with Photocell Sensor



Photocell
Sensor



IP44
Rated



Class 1





0.67kg

Code	Finish	Description	Lamp	Dimensions
ZN-34022-SST	Stainless Steel	Leto Up/Down Wall Light with Photocell	2 x 7W max LED GU10	H:160mm W:70mm Proj:122mm
ZN-34022-BLK	Black			



IP44



- Constructed from [201] stainless steel
- Outdoor ceiling light ideal for porches
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

LETO

Porch Light



Class 1




0.4kg

Code	Description	Finish	Lamp	Dimensions
ZN-37939-BLK	Leto Porch Light	Black	1 x 7W max LED GU10	H:105mm Dia:60mm
ZN-37939-ANTH		Anthracite		
ZN-37939-WHT		White		
ZN-37939-COP		Copper		

IP44




- Stainless steel [201] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options
- Multi-function PIR



LETO

Downlight with PIR Sensor




Code	Description	Finish	Lamp	Dimensions
ZN-37938-BLK	Leto Downlight	Black	1 x 7W max LED GU10	H:149mm W:68mm Proj:107mm
ZN-37938-SST		Stainless Steel		
ZN-37938-ANTH		Anthracite		
ZN-37938-WHT		White		
ZN-37938-COP		Copper		

IP44



- Stainless steel [201] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options



LETO Downlight



Class 1



0.4kg




Available in
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-37940-BLK	Leto Downlight	Black	1 x 7W max LED GU10	H:115mm W:60mm Proj:110mm
ZN-37940-SST		Stainless Steel		
ZN-37940-ANTH		Anthracite		
ZN-37940-WHT		White		
ZN-37940-COP		Copper		



IP44

NEW
COLOUR
OPTION



- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Comes in 5 different finishes

LETO

Adjustable Spotlight



IP44
Rated



Class 1




0.46kg

Code	Finish	Description	Lamp	Dimensions
ZN-26536-SST	Stainless Steel	Leto Adjustable Spotlight	1 x 7W max LED GU10	H:144mm W:85mm Proj:196mm
ZN-26536-BLK	Black			
ZN-26536-WHT	White			
ZN-26536-COP	Copper			
ZN-26536-ANTH	Anthracite			

NEW





- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Screw in spike or deck mount included
- Cable length: 500mm
- Available in 2 finishes




IP44

LETO

Dual Mount Ground Spotlight



Code	Finish	Description	Lamp	Dimensions
ZN-29180-SST	Stainless Steel	Leto Dual Mount Spotlight	1 x 7W max LED GU10	H:276mm W:60mm Proj:107mm
ZN-29180-BLK	Black			



IP44

- IP44 rated
- Constructed from [201] stainless steel and clear glass
- Available in 2 finishes


LETO

Adjustable Twin Spotlight



Code	Finish	Description	Lamp	Dimensions
ZN-34018-SST	Stainless Steel	Leto Adjustable Twin Spotlight	2 x 7W max LED GU10	H:132mm W:127mm Proj:160mm
ZN-34018-BLK	Black			

IP44



- IP44 rated
- Die-cast aluminium construction

NEVIS



Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-35740-BLK	Black	Nevis Downlight	1 x 7W max LED GU10	H:120mm W:110mm Proj:155mm

900
Lumens

IP65

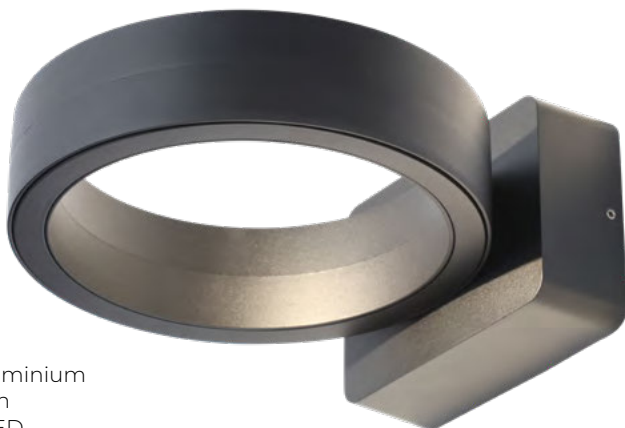

- Die-cast aluminium construction
- 16W COB LED
- K: 4000
- Lm: 900
- Lm/W: 56.25

KITT

LED Halo Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35739-BLK	Black	Kitt LED Halo Wall Light	16W	4000k	900	56.25	H:100mm W:200mm Proj:245



**700
Lumens**

IP54

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 5.4W COB LED
- K: 4000
- Lm: 700
- Lm/W: 130



REIMS Wall Light



IP54
Rated



4000K
CW



Class 1



0.35kg


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38637-BLK	Black	Reims Wall Light	5.4W	4000k	700	H:50mm W:165mm Proj:35mm



**700
Lumens**

IP65

- Die-cast aluminium construction
- Opal diffuser
- 12W LED module (SMD)
- K: 4000
- Lm: 700
- Lm/W: 58



CORTE Wall Light



IP65
Rated



4000K
CW



Class 1




0.7kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38634-BLK	Black	Corte Wall Light	12W	4000k	700	H:115mm W:165mm Proj:209mm

620
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



MAUI

LED Up/Down Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29995-BLK	Black	Maui LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:95mm

620
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



HANA

LED Up/Down Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29996-BLK	Black	Hana LED Up/Down Light	8W	4000k	620	77.5	H:110mm W:110mm Proj:95mm



**700
Lumens**

IP65



- Die-cast aluminium construction
- Includes ground spike
- Cable length: 150mm
- 12W COB LED
- K: 4000
- Lm: 700
- Lm/W: 58

Ground
Spike Light

Spotlight

**3 Different
Mounting
Options**

Wall Light

GORDA

LED Spotlight with Ground Spike




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35741-BLK	Black	Gorda LED Spotlight	12W	4000k	700	58	H:234mm W:160mm Proj:195mm

620
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



MANU



LED Up/Down Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29993-BLK	Black	Manu Up/Down LED Wall Light	8W	4000k	620	77.5	H:123mm W:130mm Proj:70mm

IP44

- Die-cast aluminium construction
- Polycarbonate diffuser

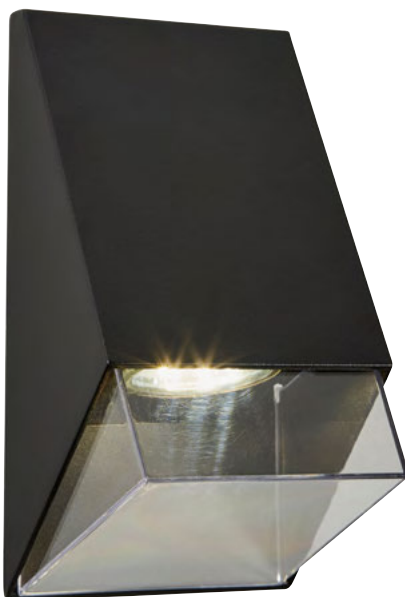

SENS

Angled Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-38631-BLK	Sens Angled Wall Light	Black	1 x 7W max LED GU10	Proj:92mm W:102mm H:180mm

- Available in 2 sizes
- Die-cast aluminium

6W LED

- K: 4000
- Lm: 275
- Lm/W: 45


12W LED

- K: 4000
- Lm: 400
- Lm/W: 33



Upto
400
Lumens

IP54



STROUD


LED Up/Down Wall Light



Code	Description	Lamp	Lumen	Dimensions
ZN-31768-BLK	Stroud Small LED Up/Down Wall Light	6W LED	275	H:90mm W:220mm Proj:77mm
ZN-31767-BLK	Stroud Large LED Up/Down Wall Light	12W LED	400	H:120mm W:300mm Proj:97mm



IP43



- PIR sensor option available

VESOUL

Wall Light




Code	Description	Finish	Lamp	Dimensions
ZN-38623-ANTH	Vesoul Wall Light	Anthracite	1 x 7W max LED GU10	Proj:94mm W:138mm H:181mm
ZN-38624-ANTH	Vesoul Wall Light with PIR sensor			

500
Lumens

IP54



- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 50



PAU

Bulkhead



IP54
Rated



4000K
CW



Class 1



0.5kg



Available in
3 colour options


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38621-ANTH	Anthracite	Pau Bulkhead	10W	4000k	500	H:108mm W:220mm Proj:121mm
ZN-38621-BLK	Black					
ZN-38621-WHT	White					

280
Lumens

IP54



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 28



RENNES

LED Guide/Wall Light



IP54
Rated



4000K
CW



Class 1




0.4kg



Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38622-ANTH	Anthracite	Rennes LED Guide/Wall Light	10W	4000k	280	H:130mm W:180mm Proj:88mm
ZN-38622-BLK	Black					
ZN-38622-WHT	White					

IP44



- IP44 rated
- Available in 2 finishes


ANTAR

Up/Down Light



Code	Finish	Description	Lamp	Dimensions
ZN-20930-BLK	Black	Antar Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:68mm H:150mm
ZN-20930-SIL	Silver			

IP44




- IP44 rated
- Available in 2 finishes

ANTAR

Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-29181-BLK	Black	Antar Downlight	1 x 7W max LED GU10	Proj:81mm W:68mm H:92mm
ZN-29181-SIL	Silver			



IP44


- IP44 rated
- Available in 2 finishes

FLEET

Square Up/Down Light



Code	Finish	Description	Lamp	Dimensions
ZN-31759-ANTH	Anthracite	Fleet Square Up/Down Wall Light	2 x 7W max LED GU10	Proj:92mm W:68mm H:150mm
ZN-31759-SIL	Silver			



IP44

- IP44 rated
- Available in 2 finishes


FLEET

Square Downlight



Code	Finish	Description	Lamp	Dimensions
ZN-31758-ANTH	Anthracite	Fleet Square Downlight	1 x 7W max LED GU10	Proj:92mm W:68mm H:81mm
ZN-31758-SIL	Silver			

IP44



- IP44 rated
- Die-cast aluminium construction

MOKU

Up/Down Wall Light



Code	Finish	Description	Lamp	Dimensions
ZN-29992-BLK	Black	Moku Up/Down Wall Light	1 x 9W LED Max E27 GLS	H:94mm W:360mm Proj:78mm


480
Lumens

IP54



White

- Aluminium body with glass diffuser
- 9W LED module (SMD)
- K: 4000
- Lm: 408
- Lm/W: 53



CANNES

Linear Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38636-ANTH	Anthracite	Cannes LED Linear Wall Light	9W	4000k	480	H:50mm W:235mm Proj:33mm
ZN-38636-WHT	White					



850
Lumens

IP44

- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85

MELO

Up/Down Wall Light



IP44
Rated



4000K
CW



Class 1



0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33460-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-33460-SST	Stainless Steel					



850
Lumens

IP44



- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85
- Photocell sensor

MELO

Up/Down Wall Light with Photocell Sensor



IP44
Rated



4000K
CW



Photocell
Sensor




Class 1



0.51kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34555-BLK	Black	Melo Up/Down Wall Light	10W	4000k	850	H:180mm W:86mm Proj:123mm
ZN-34555-SST	Stainless Steel					





- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor



IP44



- Photocell option available

LENS

Up/Down Wall Light



Photocell Sensor



IP44 Rated




Class 1



0.93kg

Code	Sensor	Description	Lamp	Dimensions
ZN-29189-ATR	-	Lens Up/Down Wall Light	2 x 7W max LED GU10	H:187mm W:102mm Proj:140mm
ZN-34042-ANTH	Photocell			



- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor



IP44



- Photocell option available

LENS

Downlight



Photocell Sensor



IP44 Rated



Class 1




0.75kg

Code	Sensor	Description	Lamp	Dimensions
ZN-29190-ATR	-	Lens Downlight	1 x 7W max LED GU10	H:155mm W:102mm Proj:140mm
ZN-34043-ANTH	Photocell			





- IP44 rated
- Die-cast aluminium construction
Black ridged finish
- Available with or without
photocell sensor




HELIX Downlight



Code	Sensor	Description	Lamp	Dimensions
ZN-35593-BLK	–	Helix Down Light	1 x 7W max LED GU10	H:162mm W:92mm Proj:104mm
ZN-35686-BLK	Photocell			



- IP44 rated
- Die-cast aluminium construction
Black ridged finish
- Available with or without
photocell sensor




HELIX Up/Down Wall Light



Code	Sensor	Description	Lamp	Dimensions
ZN-35594-BLK	–	Helix Up/Down Wall Light	2 x 7W max LED GU10	H:233mm W:92mm Proj:104mm
ZN-35685-BLK	Photocell			

1200
Lumens

IP54



- Die-cast aluminium construction
- 3 colour options available
- 20W LED module (SMD)
- Lm/W: 60
- Hrs: 30,000

MIZAR

Up/Down Wall Light



IP54
Rated



4000K
CW



Class 1



1.35kg




Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34019-ANTH	Anthracite	Mizar Up/Down Wall Light	20W	4000k	1200	H:255mm W:90mm Proj:130mm
ZN-34019-BLK	Black					
ZN-34019-WHT	White					

740
Lumens

IP54



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- Lm/W: 74
- Hrs: 30,000

MIZAR

Downlight



IP54
Rated



4000K
CW



Class 1




0.83kg



Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-34020-ANTH	Anthracite	Mizar Downlight	10W	4000k	740	H:255mm W:90mm Proj:130mm
ZN-34020-BLK	Black					
ZN-34020-WHT	White					



- Die-cast aluminium construction
- Available in 3 finishes




IP44

SKYE


Double Cone Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
ZN-29347-SIL	Skye Double Cone Up/Down Wall Light	Silver	2 x 7W max LED GU10	H:220mm W:77mm Proj:90mm
ZN-29347-BLK		Black		
ZN-29347-ANTH		Anthracite		



- Remote control operated
- Steel construction
- 5W RGB LED module (SMD)
- K: 4000
- Lm: 130
- Hrs: 20,000

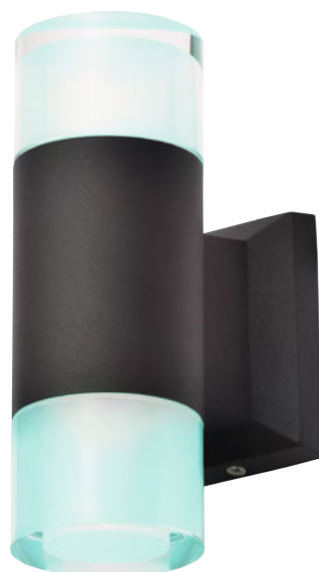

130 Lumens

IP44



ASHBY


RGB LED Up/Down Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-31765-BLK	Black	Ashby RGB LED Up/Down Wall Light	5W	RGB	130	H:180mm W:65mm Proj:115mm

NEW

IP44



- Stainless steel [201] construction
- Available in 2 finishes
- Mesh insert design



brass mesh



stainless steel mesh

GADA

Wall Light



IP44
Rated




Class 1



0.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-40004-BLK/BRS	Gada Wall Light	Black with Brass Mesh	1 x 10W max LED E27	W:102mm H:280mm Proj:160mm
ZN-40004-BLK/SST		Black with Stainless Steel Mesh		



- Stainless steel construction
- Durable polycarbonate shade
- Available in 2 finishes



IP44


LEONIS

Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-34002-SST	Leonis Wall Lantern	Stainless Steel	1 x 10W max LED E27 GLS	H:220mm W:127mm Proj:190mm
ZN-34003-BLK		Black		

IP44



- Die-cast aluminium construction
- Frosted glass
- Hook feature

CHARLOTTE

Frame Wall Lantern



IP44
Rated





Class 1



1.7kg

Code	Description	Finish	Lamp	Dimensions
ZN-38603-BLK	Charlotte Frame Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:345mm

IP44



- Die-cast aluminium construction
- Contemporary styling
- Water glass effect

KEB

Wall Lantern



IP44
Rated



Class 1




1.75kg

Code	Description	Finish	Lamp	Dimensions
ZN-32069-BLK	Keb Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:181mm H:257mm

IP44



- Die-cast aluminium construction
- Contemporary styling

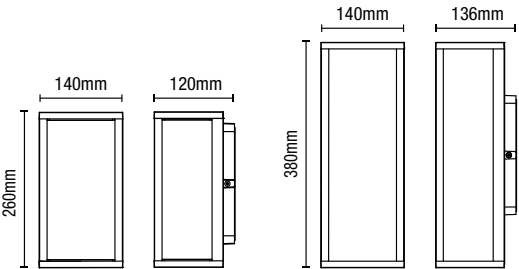

CHINON

Panel Light Box Lantern

IP44
Rated

Class 1


Code	Description	Finish	Weight	Lamp	Dimensions
ZN-38640-BLK	Chinon Panel Box Lantern	Black	1.45kg	1 x 10W max LED E27 GLS	Proj:140mm W:140mm H:260mm
ZN-38641-BLK	Chinon Panel 2LT Box Lantern	Black	2.05kg	2 x 10W max LED E27 GLS	Proj:136mm W:140mm H:380mm

1200
Lumens

IP44



- Stainless steel construction
- PVC opal cover
- 13.5W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 45



THETIS

Box Lantern



IP44
Rated



4000K
CW



Class 1




KG
1.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38354-BLK	Black	Thetis Box Lantern	13.5W	4000k	600	H:350mm W:120mm Proj:124mm
ZN-38354-SIL	Silver					

IP44



- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes




HESTIA

Glass Panel Box Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38205-BLK	Hestia Glass Panel Box Lantern	Black	1 x 10W max LED E27 GLS	W:160mm H:300mm Proj:215mm
ZN-38205-SIL		Silver		
ZN-38205-ANTH		Anthracite		

IP44



- Stainless steel construction
- Contemporary box lantern
- Available in 2 finishes



ARTEMIS

Box Lantern




Code	Description	Finish	Lamp	Dimensions
ZN-20945-BLK	Artemis Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:100mm W:220mm H:240mm
ZN-20945-SST		Stainless Steel		

IP44



- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes



MINERVA

Box Lantern



IP44
Rated



Class 1



1.7kg

Code	Description	Finish	Lamp	Dimensions
ZN-20944-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	W:160mm H:330mm Proj:100mm
ZN-20944-SIL		Silver		
ZN_20944-ANTH		Anthracite		

NEW


IP44



Black Insert



Brass Insert



- Contemporary box lantern
- Available in 3 finishes
- Mesh insert design




Silver Insert

CUBA

Box Lantern with Mesh Insert



Code	Description	Finish	Lamp	Dimensions
ZN-40002-ANTH		Anthracite/Silver Insert		
ZN-40002-BLK	Minerva Box Lantern with Mesh Insert	Black/Brass Insert	1 x 10W max LED E27 GLS	W:160mm H:330mm Proj:100mm
ZN-40002-SIL		Silver/Black Insert		



- Contemporary box lantern
- PIR Sensor
- 3-2000 LUX (adjustable)



IP44




MINERVA

Box Lantern with PIR Sensor




Code	Description	Finish	Lamp	Dimensions
ZN-32070-BLK	Minerva Box Lantern	Black	1 x 10W max LED E27 GLS	Proj:110mm W:160mm H:330mm
ZN-32070-ANTH	Minerva Box Lantern	Anthracite	1 x 10W max LED E27 GLS	Proj:110mm W:160mm H:330mm

IP44



- Stainless steel construction
- Contemporary wall lantern
- Ribbed glass effect



MEMPHIS

Wall Lantern



IP44
Rated



Class 1



1.75kg


Code	Description	Finish	Lamp	Dimensions
ZN-38602-BLK	Memphis Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:141mm W:180mm H:445mm



1000
Lumens

IP54

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 18W LED module (SMD)
- K: 4000
- Lm: 1000
- Lm/W: 55



PESSAC

Frame LED Wall Light



IP54
Rated



4000K
CW



Class 1



0.8kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38620-BLK	Black	Pessac Frame Wall Light	18W	4000k	1000	H:280mm W:150mm Proj:105mm



IP44



ZN-31757-PBLU



ZN-31757-MNT



ZN-31757-DOVG




ZN-31757-IVO



ZN-31757-ANTH

- Die-cast aluminium construction
- Clear polycarbonate diffuser
- Traditional styling



LEEK

Mini Fisherman's Lantern



Class 1



0.75kg



Available in
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-31757-ANTH	Leek Mini Fisherman's Lantern	Anthracite	1 x 10W max LED E27 GLS	Proj:230mm W:177mm H:255mm
ZN-31757-PBLU		Pale Blue		
ZN-31757-MNT		Mint		
ZN-31757-DOVG		Dove Grey		
ZN-31757-IVO		Ivory		



IP44



ZN-20957-PBLU



ZN-20957-MNT



ZN-20957-DOVG




ZN-20957-IVO



ZN-20957-BLK

- Die-cast aluminium construction
- Traditional styling



ERIS
Fisherman's Lantern



IP44
Rated



Class 1



0.7kg



Available in
5 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-20957-BLK	Eris Fisherman's Lantern	Black	1 x 10W max LED E27 GLS	Proj:260mm W:180mm H:370mm
ZN-20957-PBLU		Pale Blue		
ZN-20957-MNT		Mint		
ZN-20957-DOVG		Dove Grey		
ZN-20957-IVO		Ivory		

IP44



ZN-31809-PBLU



ZN-31809-MNT



ZN-31808-POLSST



ZN-31809-DOVG




ZN-31809-IVO



ZN-31809-SST

- Contemporary styling
- Available in 6 different finishes



KEW

Wall Lantern



IP44
Rated



Class 1



0.91kg



Available in
6 colour options

Code	Description	Finish	Lamp	Dimensions
ZN-31808-POLSST	Kew Wall Lantern	Polished Steel	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm
ZN-31809-SST		Stainless Steel		
ZN-31809-PBLU		Pale Blue		
ZN-31809-MNT		Mint		
ZN-31809-DOVG		Dove Grey		
ZN-31809-IVO		Ivory		

IP23



ZN-20955-PBLU



ZN-20955-MNT



ZN-20955-DOVG




ZN-20955-IVO



ZN-20955-BLK

- Die-cast aluminium construction with glass panels
- Traditional styling



CERES

Wall Lantern




Code	Description	Finish	Lamp	Dimensions
ZN-20955-BLK	Ceres Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:145mm W:105mm H:290mm
ZN-20955-PBLU		Pale Blue		
ZN-20955-MNT		Mint		
ZN-20955-DOVG		Dove Grey		
ZN-20955-IVO		Ivory		

IP44



- Stainless steel finish
- Vintage styling



KARI

Porch Lantern




Code	Description	Lamp	Dimensions
ZN-24507-SST	Kari Porch Lantern	1 x 10W max LED E27 GLS	H:310mm Dia:145mm

IP44



- Vintage styling
- Black satin finish



WOKING


Wall Lantern



Code	Description	Lamp	Dimensions
ZN-31807-TBLK	Woking Wall Lantern	1 x 10W max LED E27 GLS	Proj:180mm W:110mm H:380mm



IP44



- Stainless steel construction
- Polycarbonate diffuser

CARNAC


Up or Down Wall Lantern



Code	Description	Finish	Lamp	Dimensions
ZN-38630-BLK	Carnac Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:148mm W:83mm H:280mm



IP44



- Traditional style outdoor lantern
- Die-Cast Aluminium/Glass
- PIR sensor option available
- 2 colour options

Without PIR

LIBOURNE

6 Panel Wall Lantern




Code	Description	Finish	Lamp	Dimensions
ZN-38605-BLK	Libourne Wall Lantern	Black	1 x 10W max LED E27 GLS	Proj:215mm W:167mm H:360mm
ZN-38605-WHT		White		
ZN-38606-BLK	Libourne Wall Lantern with PIR sensor	Black		
ZN-38606-WHT		White		

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish



PERDITA

Half Lantern




Code	Description	Lamp	Dimensions
ZN-25464-BLK	Perdita Half Lantern	1 x 10W max LED E27 GLS	Proj:129mm W:179mm H:196mm

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish




PERDITA

Curved Wall Lantern



Code	Description	Lamp	Dimensions
ZN-25463-BLK	Perdita Curved Wall Lantern	1 x 10W max LED E27 GLS	Proj:193mm W:170mm H:230mm



- IP44 rated
- Die-cast aluminium construction
- Traditional styled half lantern
- Available with or without photocell sensor



IP44



PERSEI

Half Lantern



Photocell
Sensor



IP44
Rated




Class 1



1.08kg

Code	Sensor	Description	Lamp	Dimensions
ZN-33994-BLK	–	Persei Half Lantern	1 x 10W max LED E27 GLS	H:372mm W:207mm Proj:110mm
ZN-33995-BLK	Photocell			



- IP44 rated
- Stainless steel construction
- Available in 2 finishes
- Available with or without PIR sensor



IP44



SIGMA

Slatted Wall Lantern



PIR
Sensor



IP44
Rated



Class 1





0.65kg

Code	Finish	Sensor	Description	Lamp	Dimensions
ZN-25340-SST	Stainless Steel	–	Sigma Slatted Wall Lantern	1 x 10W max LED E27 GLS	H:275mm W:200mm Proj:90mm
ZN-28708-SST	Stainless Steel	PIR			
ZN-28708-BLK	Black	PIR			

NEW

IP44

- Aluminium & polycarbonate construction
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



GAMMA

Wall Light

IP44
Rated

Class 1



0.53kg



Code	Description	Finish	Lamp	Dimensions
ZN-39171-ANTH	Gamma Wall Light	Anthracite	1 x 10W max LED E27 GLS	W:105mm H:205mm Proj:160mm
ZN-39171-BLK		Black		

NEW

IP44



- Aluminium & polycarbonate construction
- Photocell Sensor
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



GAMMA

Wall Light with Photocell Sensor

IP44
RatedPhotocell
Sensor

Class 1



0.53kg


Code	Description	Finish	Lamp	Dimensions
ZN-39172-ANTH	Gamma Wall Light with Photocell Sensor	Anthracite	1 x 10W max LED E27 GLS	W:105mm H:205mm Proj:160mm
ZN-39172-BLK		Black		

NEW

IP44



- Aluminium & polycarbonate construction
- Matching wall light available
- Available in black & anthracite
- Compatible with most E27 lamps
- Supplied with 3 ground bolts and fixings
- Three height options: 300mm/550mm/800mm

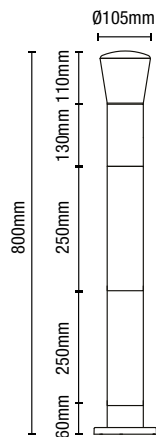

GAMMA

Post Light



IP44
Rated




Class 1



1.46kg

Code	Description	Finish	Lamp	Dimensions
ZN-39173-ANTH	Gamma Post Light	Anthracite	1 x 10W max LED E27 GLS	H:800mm Dia:105mm
ZN-39173-BLK		Black		



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 2 x 4W LED module (SMD)
- Lm/W: 100
- 30,000 hours lifetime



NEW

**400
Lumens**

IP44

POLLUX Wall Light



IP44
Rated



3000K
WW




Class 1



0.56kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-39998-BLK	Black	Pollux Up/Down Wall Light	8W	3000k	400	H:280mm W:76mm Proj:108mm
ZN-39998-SST	Stainless Steel					



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50



**200
Lumens**

IP44

POLLUX Angled Wall Light



IP44
Rated



3000K
WW




Class 1



0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38615-BLK	Black	Pollux Angled Wall Light	4W	3000k	200	Dia:76mm H:205mm
ZN-38615-SST	Stainless Steel					



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50
- PIR sensor



200
Lumens

IP44



POLLUX

Wall Light with PIR Sensor



IP44
Rated



3000K
WW



PIR
Sensor




Class 1



0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38616-BLK	Black	Pollux Wall Light with PIR Sensor	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38616-SST	Stainless Steel					



- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50



200
Lumens

IP44

POLLUX

Wall Light



IP44
Rated



3000K
WW



Class 1



0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38614-BLK	Black	Pollux Wall Light	4W	3000k	200	H:166mm W:76mm Proj:108mm
ZN-38614-SST	Stainless Steel					




200
Lumens

IP44



- Stainless steel construction
- Floor mounted
- Other matching items available
- Available in 2 finishes
- 3 variable heights - 300 / 550 / 800mm
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50



POLLUX


LED Post Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-33394-BLK	Black	Pollux LED Post Light	4W LED	3000K	200	H:800mm Dia:120mm
ZN-33394-SST	Stainless Steel					

NEW
FOR
2023

IP44

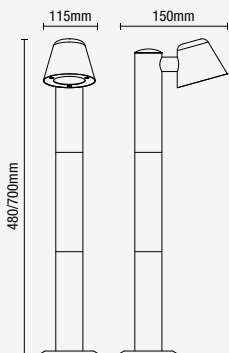

- Durable stainless steel construction
- Textured black finish
- Post light has variable heights of - 480/700mm




IVES

Post Light | Wall Light



Code	Description	Finish	Lamp	Dimensions	Weight
ZN-42097-BLK	Ives Wall Light	Black	1 x 7W max LED GU10	L:150mm W:115mm H:108mm	0.4kg
ZN-42098-BLK	Ives Post Light	Black		L:240mm W:128mm H:700mm	1.14kg

IP67



- Die-cast aluminium with glass lens robust construction
- Min void: 115mm
- Cable length: 300mm



PAN Ground Light



IP67
Rated



87mm
Cut-out




Class 1



0.35kg

Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-29184-BLK	Pan Ground Light	Black	1 x 7W max LED GU10	Dia:100mm H:135mm	Dia:87mm

IP67



- Stainless steel with glass lens robust construction
- Min void: 115mm
- Cable length: 300mm



PAN Ground Light



IP67
Rated



87mm
Cut-out





Class 1



0.35kg

Code	Description	Finish	Lamp	Dimensions	Cutout
ZN-20965-SST	Pan Ground Light	Stainless Steel	1 x 7W max LED GU10	Dia:100mm H:115mm	Dia:87mm
ZN-20965-BLK	Pan Ground Light	Black	1 x 7W max LED GU10	Dia:100mm H:115mm	Dia:87mm



160
Lumens

IP67



- Die-cast aluminium
- 4W LED module (SMD)
- K: 4000
- Lm: 160
- Lm/W: 40

SCOUT

Surface Mount Ground Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-29997-BLK	Black	Scout Surface Mount Ground Light	4W	4000k	100	40	Dia:210 Proj:54mm



100
Lumens

IP67

- Die-cast aluminium
- 3W LED module (SMD)
- K: 4000
- Lm: 100
- Lm/W: 33

SCOUT

Surface Mount Ground Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35738-BLK	Black	Scout Surface Mount Ground Light - 150mm	3W	4000k	100	33	Dia:150mm Proj:53mm




NEW
FOR
2023

250
Lumens
Per Lamp

IP65

- Plug and play 24V garden deck light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adapter requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available

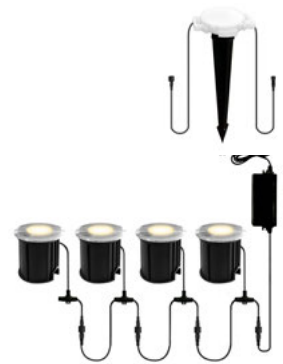

LAPIN

Recessed Deck Light Kit



Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41736	Lapin Recessed Deck 4 Light Kit	13.2m	4 x 3W	4000k	250lm per lamp	Dia. 41.5mm H:47mm	0.86kg
ZN-41737	Lapin Recessed Deck Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 41.5mm H:49mm	0.278kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	–	–	–	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	–	–	–	L:5000mm	0.102kg



NEW
FOR
2023

240
Lumens
Per Lamp

IP65

**PLUG
+
PLAY**

- Plug and play 24V garden spike light kit with add-ons available
- Lamps can be deck mounted or come with a ground spike
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adapter requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



LAPIN

Garden Spike Light Kit


IP65
Rated


Class 3

Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41732	Lapin Garden Spike 4 Light Kit	13.2m	4 x 3W	4000k	240lm per lamp	Dia. 60mm H:150mm	0.93kg
ZN-41733	Lapin Garden Spike Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 60mm H:150mm	0.34kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	–	–	–	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	–	–	–	L:5000mm	0.102kg



NEW
FOR
2023

250
Lumens
Per Lamp

IP65

**PLUG
+
PLAY**

- Plug and play 24V garden pathway light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adapter requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



LAPIN

Pathway Light Kit



Code	Description	Cable Length	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight (kg)
ZN-41734	Lapin Pathway 4 Light Kit	13.2m	4 x 3W	4000k	250lm per lamp	Dia. 35mm H:230mm	0.70kg
ZN-41735	Lapin Pathway Add-on 2 Light Kit	4m	2 x 3W	4000k		Dia. 35mm H:230mm	0.34kg
ZN-41739	Lapin Add-on Photocell Sensor	0.4m	–	–	–	Dia: 52mm H:	0.048kg
ZN-41738	Lapin Add-on Extension Cable	5m	–	–	–	L:5000mm	0.102kg



NEW

IP44

**PLUG
+
PLAY**



- Plug and play - no driver required
- Rubber H05RN-F 2 x 1.0mm² Cable
- Lamps not included
- 11.4m total length
- 1.8m from plug to first lampholder
- 48cm spacing between each head
- Connect multiple festoon lights together
- Suitable bulbs are shown on P.352



Loop multiple festoons together with weatherproof connectors

HARDY

20 x E27 Lampholder Festoon



Code	Description	Finish	Lamp	Dimensions
ZN-41106	Hardy 20 x E27 Lampholder Festoon	Black Rubber	20 x 10W max LED E27 GLS	Length: 11.4m
ZN-42263	Extension cable with A&B connector	Black Rubber	–	Length: 3.2m

PLUG + SOCKET

Cable Connectors

NEW

IP68



Code	Description	Size
ZN-41157	32A, 3 Pole, IP68 Cable Connector (1 x fast-fit connector)	H:30mm x L:95mm x D:30mm
ZN-41158	16A, 3 Pole, IP68 T 3-Way Cable Connector (3 x fast-fit connectors)	H:30mm x L:150mm x D:30mm




20
Lumens

IP65

NO
DRIVER
REQ.

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 1m cable included
- 0.5W LED module (SMD)
- Lm: 20



OHIO

Circular Decking Light



IP65
Rated



35mm
Cut-out



1M
Cable



Class 2



0.13kg


Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465-CW	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm




NEW

**80
Lumens**

IP65



- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 inline transformer with 5m cable
- Easy to install
- Available in cool and warm white

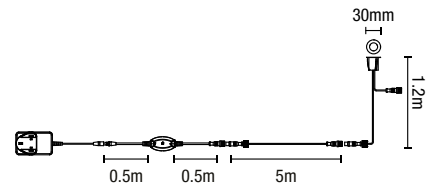

AUBIN

Deck light kit




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-40063	Stainless Steel	Aubin Deck Light Kit	10x 0.5W	3000k	80	Dia:30mm Proj:1200mm
ZN-40064				6500k		



RGB



RGBW

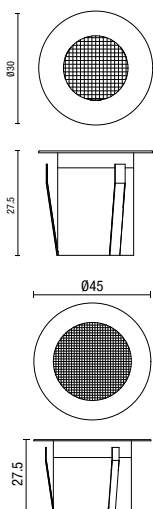


NEW

200
Lumens

IP65



- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 inline transformer with 5m cable
- Easy to install
- Smart wi-fi capability

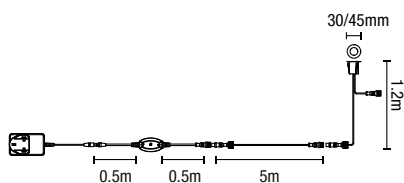

BARU

RGB Deck light kit



Code	Finish	Description	Power (w)	Colour	Total Flux (lm)	Dimensions
ZN-40065	Stainless Steel	Baru Deck Light Kit	10x 0.5W	RGB	55	Dia:30mm Proj:1200mm

BARU


RGBW Deck light kit



Code	Finish	Description	Power (w)	Colour	Total Flux (lm)	Dimensions
ZN-40066	Stainless Steel	Baru Deck Light Kit	10x 0.5W	RGBW	200	Dia:45mm Proj:1200mm

390
Lumens

IP54

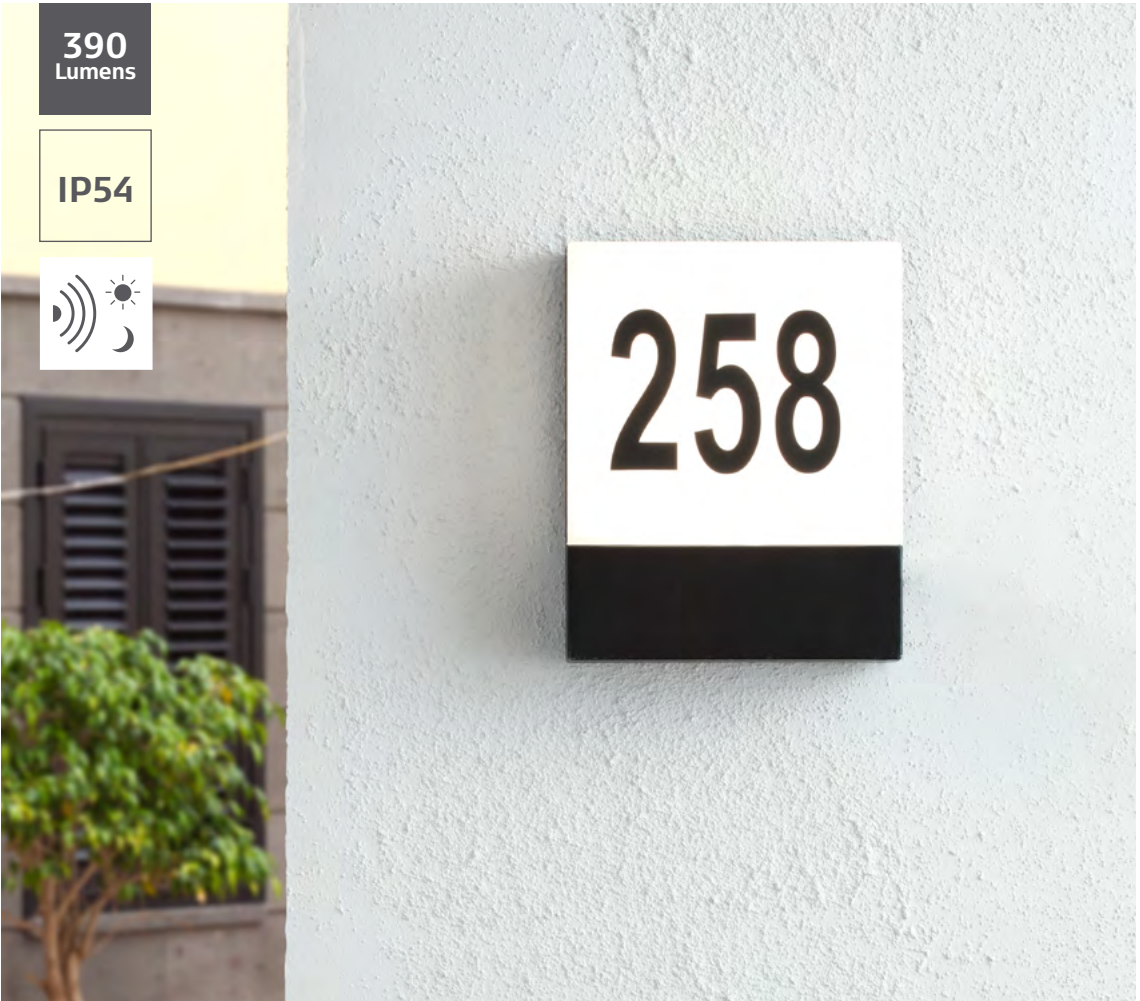

- Includes full number/letter set
- 6W LED module (SMD)
- K: 4000
- Lm: 390
- Lm/W: 65
- Hours: 30,000
- Dusk/Dawn photocell sensor



IOTA

LED Door Number



IP54
Rated



4000K
CW



Photocell
Sensor



Class 1



0.8kg

Code	Description	Finish	Lamp	Lumen	Dimensions
ZN-34044-BLK	Iota LED Door Number	Black	6W LED	390	H:200mm W:195mm Proj:36mm



1300
Lumens

IP65



- IK10 vandal resistant
- Polycarbonate construction
- 16W LED module (SMD)
- K: 3000
- Lm: 1300
- Lm/W: 81.25
- Hours: 20,000
- Automatically turns on/off at night with adjustable lux sensor <3-50 LUX



• Adhesive numbering option

MESA

LED Door Number



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-35689	Black/Opal	Mesa LED Door Number	16W	3000k	1300	81.25	H:195mm W:300mm Proj:70mm

750 Lumens

IP65





- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000

LYNN

PIR Security Spotlight


IP65
Rated


4000K
CW


PIR
Sensor


Class 2


0.35kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35687-BLK	Black	Lynn Security Spotlight with PIR Sensor	10W	4000k	750	H:205mm W:127mm Proj:140mm
ZN-35687-DGRY	Dark Grey					
ZN-35687-WHT	White					

750 Lumens

IP65



- Polycarbonate construction
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000



LYNN

Security Spotlight


IP65
Rated


4000K
CW


Class 2


0.3kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38627-BLK	Black	Lynn Security Spotlight	10W	4000k	750	H:127mm W:127mm Proj:160mm
ZN-38627-DGRY	Dark Grey					
ZN-38627-WHT	White					



IP65

1500
Lumens



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 20W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000



LYNN

PIR Twin Security Spotlight



IP65
Rated



4000K
CW



PIR
Sensor



Class 2



0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-35688-BLK	Black	Lynn Security Twin Spotlight with PIR Sensor	20W	4000k	1500	H:205-mm W:305mm Proj:135mm
ZN-35688-DGRY	Dark Grey					
ZN-35688-WHT	White					



1500
Lumens

IP65

- Polycarbonate construction
- 20W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 75
- Hrs: 20,000



LYNN

Twin Security Spotlight



IP65
Rated



4000K
CW



Class 2



0.45kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
ZN-38628-BLK	Black	Lynn Security Twin Spotlight	20W	4000k	1500	H:127mm W:179mm Proj:145mm
ZN-38628-DGRY	Dark Grey					
ZN-38628-WHT	White					


NEW

1700 Lumens

CCT

IP65

- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime



ROSA

Bulkhead

IP65 Rated

CCT

Class 1

2.3kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-39742-BLK	Black	Rosa Round Bulkhead	20W	CCT	1700	85	Dia:360mm Proj:92mm


NEW

1700 Lumens

CCT

IP65

- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime



GIGI

Eyelid Bulkhead

IP65 Rated

CCT

Class 1


2.7kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-39746-BLK	Black	Gigi Eyelid Bulkhead	20W	CCT	1700	85	Dia:360mm Proj:94mm



**480
Lumens**

IP44

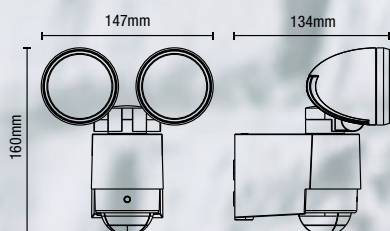

- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 6W LED module (SMD)
- K: 6000
- Lm: 480
- Lm/W: 80
- Hrs: 20,000



SIROCCO

PIR Twin Security Spotlight




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-23454-BLK	Black	Sirocco Security Twin Spotlight	6W	6000k	480	80	H:160mm W:147mm Proj:134mm
ZN-23454-WHT	White	with PIR Sensor					

NEW

Upto
22000
Lumens

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



REINA

LED Slimline Floodlight




Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-38688-BLK	Reina LED Slimline Floodlight	30W LED	3300	0.55kg	H:158mm W:154mm Proj:31mm
ZN-38689-BLK		50W LED	5500	0.78kg	H:193mm W:183mm Proj:32mm
ZN-38690-BLK		100W LED	11000	1.24kg	H:233mm W:218mm Proj:33mm
ZN-38691-BLK		150W LED	16500	1.8kg	H:268mm W:248mm Proj:33mm
ZN-38692-BLK		200W LED	22000	2.3kg	H:309mm W:285mm Proj:33mm



NEW

**Upto
11000
Lumens**

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



CLARA

LED Slimline Floodlight with PIR Sensor



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
ZN-38694-BLK	Clara LED Slimline Floodlight with PIR Sensor	30W LED	3300	0.78kg	H:193mm W:183mm Proj:32mm
ZN-38695-BLK		50W LED	5500	1.24kg	H:233mm W:218mm Proj:33mm
ZN-38696-BLK		100W LED	11000	1.8kg	H:268mm W:248mm Proj:33mm

Upto
1400
Lumens

IP54




• Tripod supplied separately

- Tough aluminium construction
- Rotates 360° on base
- Non-slip carry handle
- 40,000 hours LED lifetime
- Fully charged in 4-5 hours
- Supplied with power adapter and in-car charger
- Extendable tripod available which extends up to 1.58m for use with both 10/20W models



• Power adapter and in-car charger

RECHARGEABLE Worklight



Description	Code	Power (w)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Charge Time (h)	Run Time (h)	Dimensions
Rechargeable Work Light	ZN-31385	10W	700	70	6000k	4-5 Hours	4 Hours	L:135mm W:120mm H:255mm
	ZN-31386	20W	1400	70			8 Hours	L:160mm W:160mm H:300mm
Heavy Duty Tripod	ZN-31387	-	-	-	-	-	-	Dia:800mm W:500mm H:1580mm



3000
Lumens

IP65

- Durable rubber casing
- Heavy duty extendable tripod up to 1.6m
- 1.8m H07RN-F cable
- 2 x 20W LED module (SMD)
- K: 6000
- Lm: 3000
- Lm/W: 75
- Hrs: 20,000



TWIN LED

Worklight with Tripod



Code	Description	Voltage	Lamp	Lumen	Dimensions
ZN-34870	Twin Work Light with Tripod	220-240V	2 x 20W LED	3000	Dia:1000mm H:1600mm



OUTDOOR HEATING

New extensive range of Zink radiant heaters perfect for outdoor settings.



IP34



- Single heat setting
- Aluminium cover, size: 420 x 420mm
- Heating element: Carbon tube
- Outdoor use only
- Pull-string switch control
- Tip over switch



CORAL

Outdoor Pedestal Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-38155-SIL	Coral Outdoor Pedestal Heater	Silver	1500	H:1800mm Dia:510mm



BLAZE

STAND FOR WALL
MOUNT HEATERS




- Adjustable height

Code	Weight	Dimensions
ZR-32302-BLK	18.7kg	H:1700mm Dia:410mm

IP44



- Pull ON/OFF switch
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP44 rating
- Outdoor use only
- Stand available separately (ZR-32302)

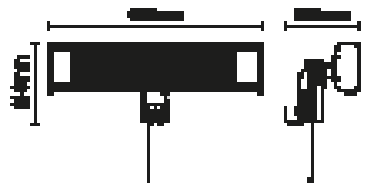

BLAZE

Wall Mounted Patio Heater



2.4kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32298-BLK	Blaze Wall Mounted Patio Heater	Black	1800	H:246mm W:650mm Proj:230mm



IP44



- Remote control operated
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP44 rating
- Outdoor use only
- 2 x 1W integrated LED lamps
- Stand available separately (ZR-32302)



BLAZE

Wall Mounted Patio Heater with LED Lights



3.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32299-BLK	Blaze Wall Mounted Patio Heater with LED Lights	Black	1800	H:246mm W:890mm Proj:230mm




3
HEAT
SETTINGS

IP24



- Pull switch
- 3 variable heat settings
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m²
- IP24 rating
- Outdoor use only
- Stand available separately (ZR-32302)



BLAZE

Wall Mount Patio Heater Variable Watt



Code	Description	Finish	Power (w)	Dimensions
ZR-32297-BLK	Blaze Wall Mount Patio Heater	Black	2000	H:264mm W:482mm Proj:225mm



IP34



Pendant Heater

- ON/OFF switch
- Remote control operated
- Integrated LED light
- Heat coverage approx 20m²
- IP34 rating
- Outdoor use only

Floor Standing Heater

- Pull string switch
- 2 heat setting
- Tip over safety switch
- Heat coverage approx 20m²
- IPX4 rating
- Outdoor use only



MARL
Outdoor Heaters



Code	Description	Finish	Power (w)	Dimensions	Weight
ZR-38532-SST	Marl Pendant Heater	Stainless Steel	2000	H:290mm Dia:510mm	2.1kg
ZR-38831-SST	Marl Floor Standing Heater	Stainless Steel	2000	H:2000mm Dia:500mm	8.4kg

IP34




- Pull string switch
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only

CORAL

Pendant Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-38529-SST	Coral Pendant Heater	Stainless Steel	1500	H:240mm Dia:420mm



IP34

Pendant Heater

- Remote control operated
- Integrated LED light
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only

Floor Standing Heater

- Pull string switch
- Single heat setting
- Tip over safety switch
- Heat coverage approx 15m²
- IP34 rating
- Outdoor use only



Onyx

Outdoor Heaters



Code	Description	Finish	Power (w)	Dimensions	Weight
ZR-38833-BLK	Onyx Pendant Heater	Black	1500	H:2000mm Dia:500mm	8.8kg
ZR-38834-BLK	Onyx Floor Standing Heater	Black	1500	H:420mm Dia:310mm	2.5kg

3
HEAT
SETTINGS



IP44



- Free standing or wall mounted
- 3 heat settings
- Heat coverage approx 12m²
- Steel cover, size: 500 x 360mm
- Heating element: Carbon tube
- Outdoor use only
- Waterproof: IP44
- Pull-string switch control
- Tip over switch
- Stand included

OPAL

Outdoor/Indoor Pedestal Heater


3 Heat
Settings



IP44
Rated


8.4kg

Code	Description	Finish	Power (w)	Dimensions
ZR-38156-BLK	Opal Outdoor/Indoor Pedestal Heater	Black	2000	H:1710–2100mm Dia:500mm



- Remote control
- Hanging and wall mount type
- 3 heat settings - 900/1900/2800W
- Heat coverage approx 25m²
- 4 Hour timer
- 1.9M Cable
- Black brushed aluminium finish
- PIR economy function

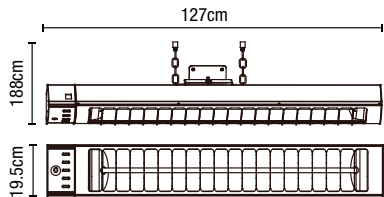

JET

Outdoor Ceiling Mount Heater




Code	Description	Finish	Power (w)	Dimensions
ZR-37443-BLK	Jet Outdoor Ceiling Mount Heater	Black	2800	H:188mm W:1270mm L:195mm



3
HEAT
SETTINGS

IP65

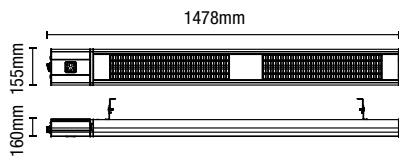

- Ideal for commercial applications
- Remote control operated
- Variable heat setting
- 1-9 Hour Timer
- Heat coverage 20m²
- IP65 rating
- Outdoor use only



GLOW

Wall Mounted Heater



3 Heat
Settings



IP65
Rated



4.96kg

Code	Description	Finish	Power (w)	Dimensions
ZR-32301-BLK	Glow Wall Mounted Heater	Black	3000	H:160mm W:1478mm Proj:155mm



- Ideal for indoor/outdoor use
- Remote control operated
- 3 variable heat settings
- 0-24 Hour Timer
- Heat coverage approx 12m²
- IP55 rating

INDOOR/OUTDOOR

Wall Mount Heater with 24Hr Timer



Code	Description	Finish	Power (w)	Dimensions
ZR-32328-BLK	Wall Mount Heater with 24Hr Timer	Black	2000	H:140mm W:900mm L:90mm



IP65



- Bluetooth speaker
- Remote control operated
- Heat coverage approx 12m²
- 1.5M HO7RN-F 3G1.5MM cable
- ON/OFF and power adjust for remote
- IPX5
- Outdoor use only



FLINT

Wall Mount Heater with Bluetooth Speaker



Bluetooth
Speaker



IPX5
Rated




3.5kg

Code	Description	Finish	Power (w)	Dimensions
ZR-37444-BLK	Flint Wall Mounted Heater with Bluetooth	Black	2000	H:120mm W:745mm L:110mm

IP45



- Carbon fibre tube
- ON/OFF switch
- Fabric-flocked vents area
- 1.8M cable
- Heat coverage approx 4m²
- IP45 rated



HARRY

Outdoor Portable Table Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37441-BLK	Harry Outdoor Portable Table Heater	Matt Black	1200	H:650mm Dia:195mm




3
HEAT
SETTINGS

IP55



- Remote control operated
- Tip over safety switch
- 3 variable heat settings
- Heat coverage approx 10m²
- IP55 rated
- Outdoor use only



BLAZE


Standing Patio Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-32300-BLK	Blaze Standing Patio Heater	Black	1600	H:1117mm Dia:283mm



IP55



- 2 heat settings: 1480/2960W
- Carbon fibre heating technology
- Large, effective heating area of up to 30m²
- PIR economy system
- IP55 rated
- 12W LED Colour changing light: Warm/Daylight/Cool
- Gun metal hammered finish with fabric flocked grille with storage cover
- Magnetic remote control

AMBER

Floor Standing Outdoor Heater




Code	Description	Finish	Power (w)	Dimensions
ZR-37442-GMTL	Amber Free Standing Heater	Gun Metal	3000	H:1470mm Dia:160mm

IPX3



- Iron lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 10m²
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- Each lamp independently switched
- Outdoor use only




TOPAZ

2 x 800W Parasol Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37448-BLK	Topaz Parasol Heater	Black	2 x 800	H:2141mm W:804mm Proj:198mm

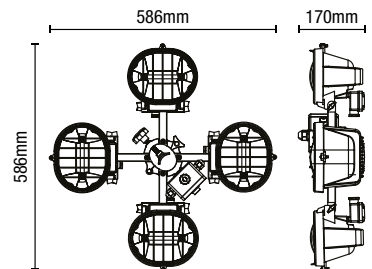

- Aluminium diecast lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 12m²
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- ON/OFF switch
- Outdoor use only

RUBY

4 x 450W Parasol Heater



Code	Description	Finish	Power (w)	Dimensions
ZR-37445-BLK	Ruby Parasol Heater	Black	4 x 450	H:170mm W:586mm Proj:586mm

IP66 13A SWITCHED SOCKET

IP66

IK08

- IP66 / IK10 rated
- Lockable lid
- Multiple 20mm cable entries
- Certified to BS 1363-2



Code	Description
ZN-38865	1 Gang IP66 13A Socket
ZN-38863	2 Gang IP66 13A Socket

IP66 RCD 13A SWITCHED SOCKET

IP66

IK08

- IP66 rated
- Lockable lid
- Multiple 20mm cable entries
- Trip Current: 30mA
- Trip Speed: 100ms
- Certified to BS 1363-2
- RCD Type A



Code	Description
ZN-38864	2 Gang IP66 RCD 13A Socket

FUSED SPUR SWITCHED

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries




Code	Description
ZN-38870	Switched + Indicator

IP66 EMPTY ENCLOSURE

IP66

IK08

- Accepts standard switches and sockets
- IP66 / IK10 rated
- Multiple 20mm cable entries

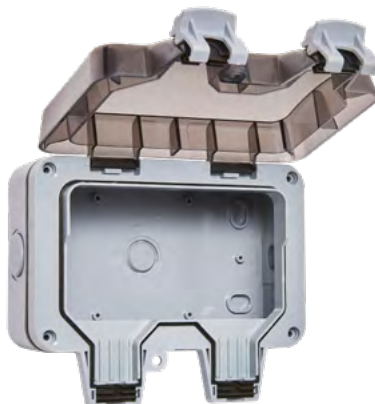

Code	Description
ZN-38869	1 Gang Empty Enclosure
ZN-38868	2 Gang Empty Enclosure

IP66 20A SWITCH

IP66

IK08

- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description
ZN-38866	1 Gang 1 Way 20A Switch
ZN-38867	2 Gang 2 Way 20A Switch

IP66 20A BELL SWITCH

IP66

IK08

- IP66 / IK08 rated
- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



Code	Description
ZN-38871	1 Gang 1 Way 20A Bell Switch

**390
Lumens**



- Polycarbonate construction
- Can detect day or night with adjustable LUX
- 6m Detection Distance
- 10 secs - 5min adjustable timer
- 8W LED module (SMD)

RENO

LED Recessed PIR Spotlight



80mm
Cut-out



360°
Beam



3000K
WW



PIR
Sensor

Code	Power (w)	Colour (k)	Total Flux (lm)	Distance	Range	LUX (adjustable)	Time Delay (adjustable)	Dimensions
ZN-35690-WHT	8W	4000k	500	Max 6m	360°	<3-2000 LUX	Min.10sec±3sec Max.5min±1min	Dia:105mm H:48mm

**MANUAL
OVERRIDE**



IP44



- Polycarbonate construction
- LED compatible
- Manual override function
- 20m max detection distance
- Can be installed up to 6m high



NAPA

Adjustable Wall PIR Sensor



IP44
Rated



PIR
Sensor

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-35691-BLK	2 – 6m	Max 20m	360°	3-2000 LUX (adjustable)	2000W Halogen 600W LED	H:56mm W:87mm Proj:173mm



MANUAL
OVERRIDE

IP65



- Polycarbonate construction
- LED compatible
- Adjustable LUX and timer
- Manual override (8 hrs)
- Detection Distance: 5 - 12m
- Timer: 10 secs - 15min

DION
Adjustable Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33579-BLK	Black	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen	H:51.5mm W:80mm Proj:119.5mm
ZN-33579-WHT	White					300W LED	
ZN-33579-DGRY	Dark Grey						



IP44



- Polycarbonate construction
- LED compatible
- Detection Distance: 5 - 12m
- Timer: 10 secs - 7min

DION
Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25151-BLK	Black	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen	H:150mm W:90mm Proj:120mm
ZN-25151-WHT	White					300W LED	
ZN-25151-DGRY	Dark Grey						

IP65



- Polycarbonate construction
- LED compatible
- Easy to adjust LUX & time
- 12m max detection distance
- 2 sensors for extended range of detection
- Creep sensor

DION

Stealth Motion Sensor



IP65
Rated



PIR
Sensor




0.15kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31787-WHT	1.6 – 2.5m	5 – 12m	180°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	Proj:119.5mm W:80mm H:51.5mm

IP44

MANUAL
OVERRIDE

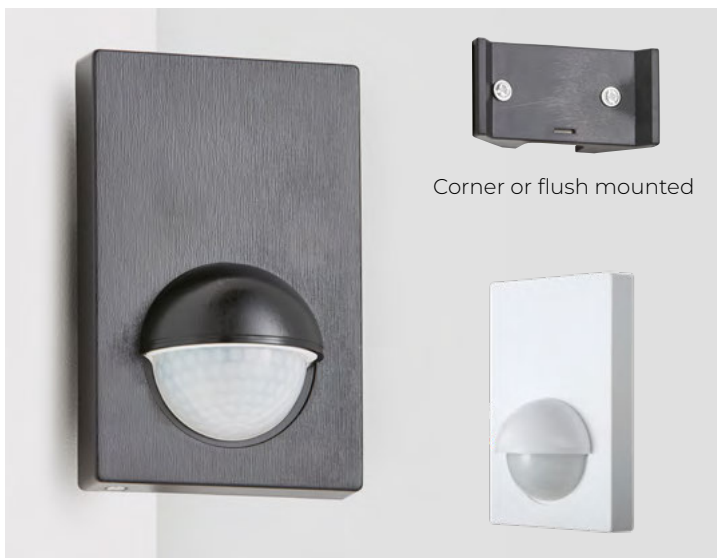

Corner or flush mounted

- Polycarbonate construction
- LED compatible
- Detection Distance: max 12m

ALIA

Adjustable Motion Sensor



IP44
Rated



PIR
Sensor



0.15kg

Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-33615-BLK	Black	1.6 – 2.5m	max 12m	180°	3-2000 LUX (adjustable)	1200W Halogen	H:120mm W:78mm Proj:53mm
ZN-33615-WHT	White					300W LED	

**IP20****x3
SENSOR**

- LED compatible
- 3 integral sensors
- 20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction

LOCA

Advanced Motion Sensor

IP20
RatedPIR
Sensor

0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29177-WHT	1.6 – 2.5m	Max 20m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	L:102mm W:102mm H:58mm

**IP20****x3
SENSOR**

- LED compatible
- 3 integral sensors
- 12m max detection distance
- 360° detection range
- 10 secs – 7 mins adjustable timer
- Polycarbonate construction

LOCA

Motion Sensor

IP20
RatedPIR
Sensor

0.10kg


Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25154-WHT	1.6 – 2.5m	12m max	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:55mm Dia:88mm

ALIA

CORNER MOTION SENSOR



AVAILABLE SETTINGS

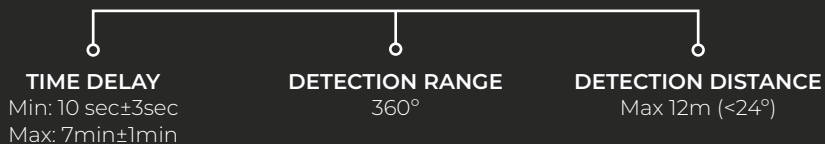

IP44



- Polycarbonate construction
- LED compatible
- Can be fitted to an external or internal corner.
- Mount can be removed to fit flush against walls.
- Detection Distance: 5 - 12m
- Detection Range: 360°
- Timer: 10 secs - 7min

- Removeable corner mount

ALIA

Corner Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25152-BLK	Black	1.6 – 2.5m	5 – 12m	360°	3-2000 LUX (adjustable)	1200W Halogen	H:79mm W:60mm Proj:119mm
ZN-25152-WHT	White					300W LED	
ZN-25152-DGRY	Dark Grey						

NEW



- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

LOCA

Motion Sensor



0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25153-WHT	2 – 2.4m	Max 6m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:46mm Dia:88mm



- LED compatible
- 3-20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction

LOCA

Extended Range Motion Sensor



0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31786-WHT	1.6 – 2.5m	Max 3-20m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:51mm Dia:120mm



- Easily remove cover when recessed to adjust settings
- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

LOCA

Recessed Motion Sensor



40mm
Cut-out



0.05kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-25155-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 200W LED	H:16.8mm Dia:50mm

- 3 mounting positions
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction



THEA

Conduit Motion Sensor



Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-31805-WHT	1.6 – 2.5m	Max 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:39mm Dia:80mm

- LED compatible
- Adjustable LUX level
- 1, 2, 3, 4, 5, 6, 7, 8, 9 hours timer
- Polycarbonate construction



ADRA

Dusk Till Dawn Sensor



Code	Timer	LUX	Max Rated Load	Dimensions
ZN-25156-BLK	1, 2, 3, 4, 5, 6, 7, 8, 9 Hours	3-500 LUX (adjustable)	1200W Halogen 250W LED	H:190mm W:70mm Proj:41mm

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 2 – 15m detection distance when wall mounted
- 1.8mm radius when ceiling mounted
- 180/360° detection range
- 10 secs – 12 mins adjustable timer




THEA

Wall/Ceiling Microwave Sensor




Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29185-WHT	1.6 – 3.5m	2 – 15m	180/360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	L:76mm W:37mm H:25mm

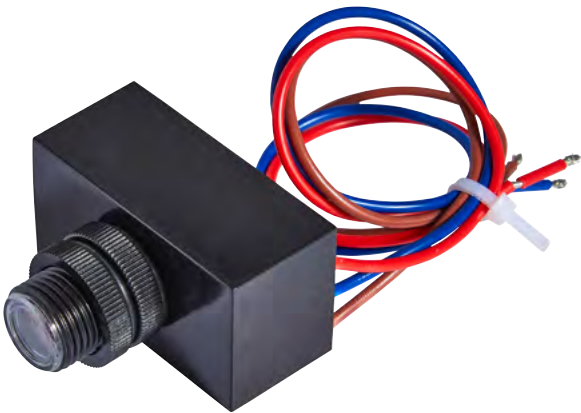

- Rated current: 10A
- Ambient light: <10LUX

ADRA
Photocell Sensor



Code	Description	Finish	Max Rated Load	Dimensions
ZN-38599-BLK	Adra Photocell Sensor	Black	1200W Halogen 300W LED	H:70mm W:110mm Proj:35mm



- Polycarbonate construction
- LED compatible
- Detection Distance: max 10m
- Detection Range: 360°
- Timer: 10 secs - 30min

DION
Batten Motion Sensor



Code	Finish	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-38600-WHT	White	1.6 – 2.5m	max 10m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:28mm W:33mm Proj:113mm

IP20



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 1 – 8m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

THEA
Stealth Microwave Sensor



0.11kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29186-WHT	1.6 – 3.5m	1 – 8m	360°	3-2000 LUX (adjustable)	1200W Halogen 500W LED	H:24mm Dia:115mm

IP44



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 5 – 15m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

THEA
Recessed Microwave Sensor



62mm
Cut-out



Microwave
Sensor



0.10kg

Code	Installation Height	Distance	Range	LUX	Max Rated Load	Dimensions
ZN-29187-WHT	1.6 – 3.5m	5 – 15m	360°	3-2000 LUX (adjustable)	1200W Halogen 300W LED	H:75.4mm Dia:76mm



SOLAR

The new Zink solar range offers a wide selection of solar powered, functional, aesthetic, domestic light fittings, that are easily installed without the expense and damage caused by laying cable for traditional 240V lighting.

POST/LANTERN	126-130
GROUND	131
WALL LIGHTS	132-134
PIR WALL LIGHTS	135-140
SECURITY & FLOODLIGHTS	141
SPIKE LIGHTS	142-147
DECK LIGHTING	148
FESTOON	149




NEW
FOR
2023



IP44



- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CADEBY

LED Solar Wall Lantern



IP44
Rated



3000K
WW



0.23kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42031	Black	Cadeby Solar LED Wall Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 900mAh	W:140mm H:205mm Proj:160mm


NEW
FOR
2023



IP44



- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CADEBY

LED Solar Post Lantern



IP44
Rated



3000K
WW



0.26kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42032	Black	Cadeby Solar LED Post Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 900mAh	H:575mm Dia. 170mm



NEW
FOR
2023



IP44



- OFF/Low/High light function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



HORDEN

LED Solar Hanging Wall Lantern



IP44
Rated



3000K
WW



0.7kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42033	Black	Horden Solar LED Wall Lantern	1W	3000k	15	6-8hrs	1 x 1.2V AA NiMH 1000mAh	W:175mm H:380mm Proj:225mm

NEW
FOR
2023



IP44



- OFF/Low/High function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



TANFIELD

LED Solar Post Lantern



IP44
Rated



3000K
WW



0.7kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42034	Black	Tanfield Solar LED Post Lantern	1W	3000k	200	6-8hrs	1 x 1.2V AA NiMH 900mAh	H:575mm Dia. 170mm


NEW
FOR
2023



IP44



- Steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CRESWELL

LED Solar Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42043	SST	Creswell Solar LED Wall Light	0.6W	6000k	30	6-8hrs	2 x 1.2V AA NiMH 900mAh	W:117mm H:365mm Proj:145mm

NEW
FOR
2023



IP44



- Steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CRESWELL

LED Solar Spike Light



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42044	SST	Creswell Solar LED Spike Light	0.6W	6000k	30	6-8hrs	2 x 1.2V AA NiMH 900mAh	H:365mm Dia. 117mm



NEW
FOR
2023


**ENERGY
SAVING**

IP65


SOLAR

- Low level design for installation almost anywhere
- 121mm x 121mm design to fit on top of a fence post as well as a ground light
- Aluminium and PVC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Built in photocell sensor for auto ON at dusk/dawn
- Charge lasts up to 8 hours after full charge
- IP65 weather resistant



TANFIELD

LED Solar Post/Ground Light

 IP44
Rated

 4000K
CW

 0.28kg

 Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42035	Black	Tanfield Solar LED Post/Ground Light	1W	4000k	30	6-8hrs	1 x 1.2V AA NiMH 1000mAh	L:121mm W:121mm Proj:29mm

NEW
FOR
2023



ENERGY
SAVING

IP44



SOLAR



- Die-cast aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



WISTOW

LED Solar Wall Light



IP44
Rated



3000K
WW



0.6kg



Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42039	Black	Wistow Solar LED Wall Light	0.4W	3000k	10	6-8hrs	1 x 1.2V AA NiMH 1000mAh	W:83mm H:205 Proj:53mm



- Steel (201) construction
- OFF/Dim 1/Dim 2/Dim 3 push button switch
- Separate solar panel with 5m cable allows installation in areas with no mains power
- Solar panel can be charge with the mini USB-A cable
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



ELDON

LED Up/Down Solar Wall Light


IP44
Rated


3000K
WW


0.66kg


Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42040	SST	Eldon Solar LED Wall Light	2W	3000k	150	6-8hrs	1 x 3.7V Li-ion 2000mAh	W:77mm H:185mm Proj:110mm
ZN-42041	Black							

NEW
FOR
2023



**ENERGY
SAVING**



IP44



SOLAR



- Steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



TRIMDON

LED Solar Downlight



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42045	SST							
ZN-42046	Black	Trimdon Solar LED Downlight	1W	3000k	100	6-8hrs	1 x 3.7V Li-ion 1200mAh	W:90mm H:135mm Proj:120mm
ZN-42047	Anth							



- 3 Modes: a) Always ON 60lm b) Always ON 60lm, Motion Detected 240lm 25secs c) Always OFF, Motion Detection Detected 600lm 25secs d) OFF
- Aluminium & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 8-12m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



CLAIRE

LED Solar Wall Light with PIR Sensor

IP44
Rated

3000K
WW

0.48kg

Class 3


Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42048	SST	Claire Solar LED Wall Light with PIR	4.4W	3000k	600	6-8hrs	1 x 3.7V Li-ion 2200mAh	W:160mm H:180mm Proj:162mm
ZN-42049	Black							

200
Lumens

IP44



- Glass lens with ABS and steel construction
- Battery: 1800mAh Li-ion
- Time on: 30 seconds
- 3-5m Detection Distance
- 2W LED module (SMD)
- K: 6000
- Lm: 200
- Lm/W: 100
- Hrs: 20,000



SOLAR

Security Sensor Light



IP44
Rated



6000K
DW



PIR
Sensor

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
ZN-37052-BLK	Black	Solar Security Sensor Light	2W	6000k	200	100	H:160mm W:147mm Proj:134mm



- OFF/High/Low push button function
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 15 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



MARLEY

LED Solar Wall Light with PIR Sensor



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42037	Black	Marley Solar LED Wall Light w/ PIR	4W	6000k	230 (hi) 100 (low)	6-8hrs	1 x 3.7V Li-ion 1500mAh	H:125mm W:95mm Proj:49mm

NEW
FOR
2023




**ENERGY
SAVING**

IP44



SOLAR

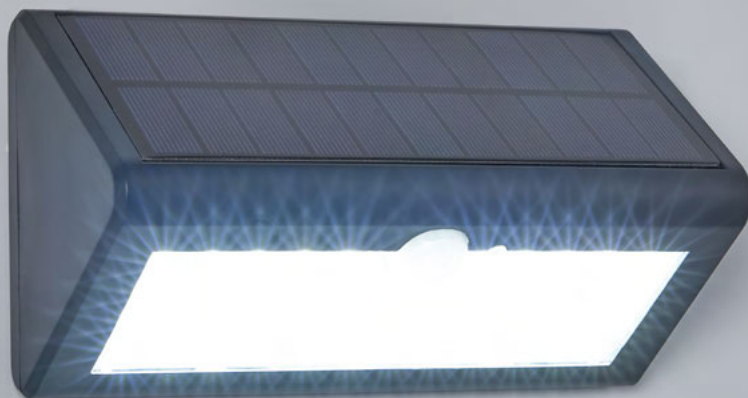

- OFF/High/Low push button function
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 25 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



DAWDON

LED Solar Wall Light with PIR Sensor



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42042	Black	Dawdon Solar LED Wall Light w/ PIR	9.2W	6000k	450	6-8hrs	2 x 3.7V Li-ion 2000mAh	H:115mm W:207mm Proj:85mm



- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- Battery < 30% OFF Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



BLACKHALL

LED Solar Wall Light with Microwave Sensor

IP44
Rated

6500K
DW

0.54kg

Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42056	Black	Blackhall Solar LED Wall Light	4.5W	6500k	400	6-8hrs	2 x 3.7V Li-ion 2000mAh	H:195mm W:230mm Proj:103mm

NEW
FOR
2023



**ENERGY
SAVING**

IP44



SOLAR



- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs
- Battery < 30% OFF Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



BLACKHALL


LED Solar Wall Light with Microwave Sensor



Code	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions	Weight (kg)
ZN-42054	Blackhall Solar LED Wall Light	2.5W	6500k	230	4-6hrs	1x 3.7V Li-ion 1500mAh	H:190mm W:95mm Proj:90mm	0.22kg
ZN-42055		3.5W	6500k	300		1x 3.7V Li-ion 1800mAh	H:225mm W:115mm Proj:105mm	0.28kg



- Remote control operated with adjustable functions. ON/OFF, Brightness $\pm$, Timer 3, 5 or 8 Hours, Automatic.
- Aluminium, glass & steel construction
- Separate solar panel with 1m cable allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 12 hours after full charge
- IP65 weather resistant
- Available in 3 sizes and wattages

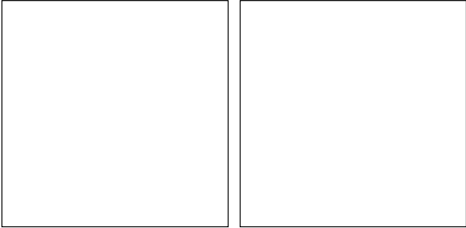

DENBY

LED Solar Floodlight



Code	Description	Power (w)	Colour (k)	Lumen (lm)	Working Time	Batteries	Dimensions	Weight (kg)
ZN-42051	Denby LED Solar Floodlight	30W	6500k	300	12hrs	1 x 3.7V LiPo 2500mAh	W:150mm H:170mm Proj:113mm	1.076kg
ZN-42052	Denby LED Solar Floodlight	50W	6500k	450	12hrs	2 x 3.7V LiPo 5000mAh	W:182mm H:203mm Proj:135mm	1.6kg
ZN-42053	Denby LED Solar Floodlight	100W	6500k	1000	12hrs	2 x 3.2V LiPo 1000mAh	W:195mm H:230mm Proj:155mm	2.1kg





NEW
FOR
2023



IP65



- Compatible with Smart Apps
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 6 hours on high, 12 hours on low brightness after full charge
- IP44 weather resistant



BYERMOOR
LED Solar Smart Spike Light



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42050	Black	Byermoor LED Solar Smart Spike Light	1W	RGB+W CCT	50	6hrs	1 x 5.5V Li-ion 1200mAh	H:420mm W:107 D:145mm





NEW
FOR
2023


**ENERGY
SAVING**


SOLAR

IP54



- 4 Modes: a) Always ON 90lm b) Always ON 90lm, Motion Detected 500lm 30secs c) Always OFF, Motion Detection Detected 500lm 30secs d) SOS
- ABS & PC construction
- Supplied with IR remote control
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 4-6m detection distance
- Charge lasts up to 8 hours after full charge
- IP54 weather resistant



BRADLEY

LED Solar Floodlight with Ground Spike

 IP54
Rated

 6500K
DW

 0.38kg

 Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42057	Black	Blackhall Solar LED Wall Light	3W	6500k	500	8-9hrs	1 x 3.7V Li-ion 1200mAh	H:610mm W:345mm Proj:130mm

NEW
FOR
2023



IP65



- Supplied with IR remote control
- ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant



MALTBY

LED Solar Spike Light Kit



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42058	Black	Maltby LED Solar Spike Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:250mm Dia. 40mm (per lamp)



NEW
FOR
2023


**ENERGY
SAVING**

SOLAR

IP65

**RGB
+4K**

- Supplied with IR remote control
- ABS & PC construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant




DAW

LED Solar Spike Light Kit

IP65 Rated
 RGB +4000k
 0.65kg
 Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42059	Black	Daw LED Solar Spike Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:230mm Dia. 37mm (per lamp)

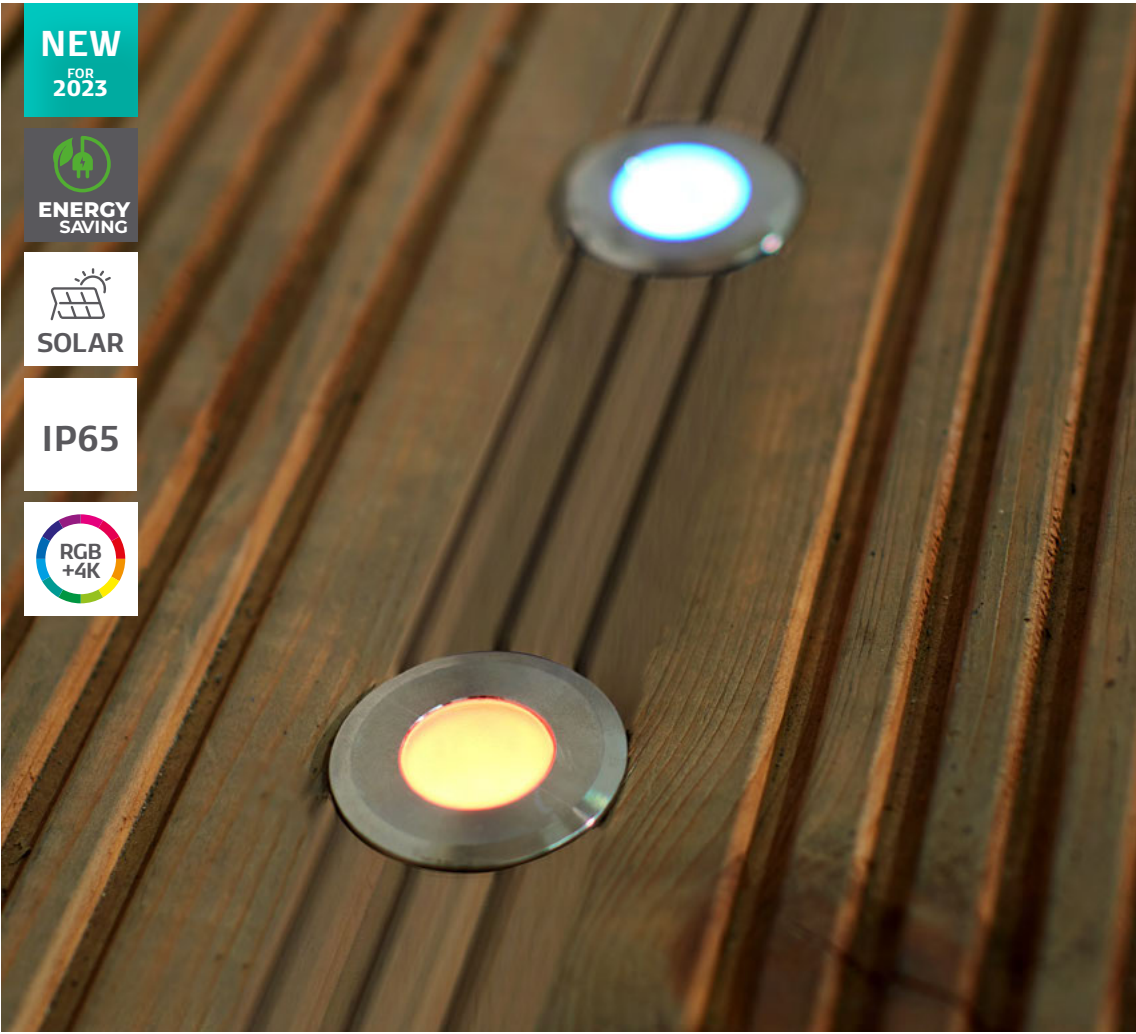

- Supplied with IR remote control
- ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Solar panel can be spike or deck mounted
- IP65 weather resistant



AYLE

LED Solar Deck Light Kit



Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42060	Black	Ayle LED Solar Deck Light Kit	2W	RGB+ 4000K	200	8-10hrs	2 x 3.7V Li-ion 2400mAh	H:47mm Dia. 41.5mm (per lamp)



NEW
FOR
2023


ENERGY
SAVING


SOLAR

IP44

- 4 Light Modes: ON/Slow Flash/Fast Flash/Pulsating
- Solar panel can be wall or spike mounted and recharged with the USB-A cable supplied
- Solar panel has 4m cable until first lamp then 0.6m spacing between each lamp
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



WYE

LED Solar Festoon Light Kit


IP44
Rated


2700K
WW


1.1kg


Class 3

Code	Finish	Description	Power (w)	Colour (k)	Lumen (lm)	Charge Time	Batteries	Dimensions
ZN-42229	Black	Wye LED Solar Festoon Light Kit	5W	2700	60 (each)	8-10hrs	1 x 3.7V Li-ion 2200mAh	Overall L:1000mm






COASTAL

An extensive range of outdoor lighting constructed from polycarbonate with grade 316 stainless steel fixings. Domestic light fittings, designed with coastal areas in mind.

POST LIGHTS	152-153
LANTERN	154-159
BULKHEADS	160-167
WALL	168-173
GUIDE LIGHTS	175-177
GROUND	179
SECURITY & FLOODLIGHTS	180-181

IP44

ADJUSTABLE
HEIGHT



- Polycarbonate construction
- Corrosion resistant
- Three height options:
1260mm/860mm/460mm



BIANCA

Post Lantern




Code	Description	Lamp	Dimensions
CZ-25148-BLK	Bianca Tall Post Lantern (3 Heights)	1 x 10W max LED E27 GLS	W:222mm H:1270mm

IP44



- Polycarbonate construction
- Corrosion resistant




BIANCA

Triple Head Tall Post Lantern



Code	Description	Lamp	Dimensions
CZ-25149-BLK	Bianca Triple Head Tall Post Lantern	3 x 10W max LED E27 GLS	Dia: 578 H:2216mm

IP44



- Polycarbonate construction
- Corrosion resistant
- 2 alternate installation options

BIANCA

Up or Down Wall Lantern




Code	Description	Lamp	Dimensions
CZ-25145-BLK	Bianca Up or Down Wall Lantern	1 x 10W max LED E27 GLS	Proj:261mm W:222mm H:402mm

IP44



MANUAL
OVERRIDE



- Polycarbonate construction
- Corrosion resistant
- 6m Detection Distance
- Manual override function enables you to switch off PIR

BIANCA

Wall Lantern with PIR




Code	Description	Lamp	Dimensions
CZ-25150-BLK	Bianca Wall Lantern with PIR	1 x 10W max LED E27 GLS	Proj:215mm W:171mm H:382mm



IP44

- Polycarbonate construction
- Corrosion resistant
- Vintage style half lantern
- Available with or without PIR sensor
- 6m Detection Distance



ATHENA

Half Wall Lantern



IP44
Rated



PIR
Sensor




Class 2

Code	Sensor	Description	Lamp	Dimensions
CZ-31748-BLK	–	Athena Wall Lantern	1 x 10W max LED E27 GLS	Proj:110mm W:180mm H:370mm
CZ-26743-BLK	PIR			



IP44

- ABS & PC construction
- Corrosion resistant



JURA

Wall Lantern



IP44
Rated



Class 2

Code	Description	Lamp	Dimensions
CZ-35742-BLK	Jura Wall Lantern	1 x 10W LED Max E27 GLS	Proj:185mm W:112mm H:215mm




IP54



· Alternative mounting option

- Polycarbonate construction
- Corrosion resistant
- Available in black & anthracite
- Can be fitted either upward, downward or sideways



PILULE

Wall Light



IP54
Rated



Class 2




0.3kg

Code	Description	Finish	Lamp	Dimensions
CZ-38639-BLK	Pilule Wall Light	Black	1 x 10W max LED E27 GLS	W:97mm H:240mm Proj:88mm
CZ-38639-ANTH		Anthracite		

IP44



- Polycarbonate construction
- Corrosion resistant



YORK

Globe Wall Lantern




Code	Description	Lamp	Dimensions
CZ-31811-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Proj:220mm W:200mm H:253mm

IP44



- Polycarbonate construction
- Corrosion resistant



YORK

Globe Post Lantern




Code	Description	Lamp	Dimensions
CZ-31812-BLK	York Globe Wall Lantern	1 x 10W max LED E27 GLS	Dia:220mm H:405mm

IP44



- Polycarbonate construction
- Corrosion resistant
- Contemporary styling
- Vandal resistant materials



YORK

Globe Porch Lantern



Code	Description	Lamp	Dimensions
CZ-33461-BLK	York Globe Porch Lantern	1 x 10W max LED E27 GLS	Dia:200mm H:242mm

750
Lumens

IP65


- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted (vertical or horizontal)

CZ-34026-BLK

- 8W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

CZ-34027-BLK

- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

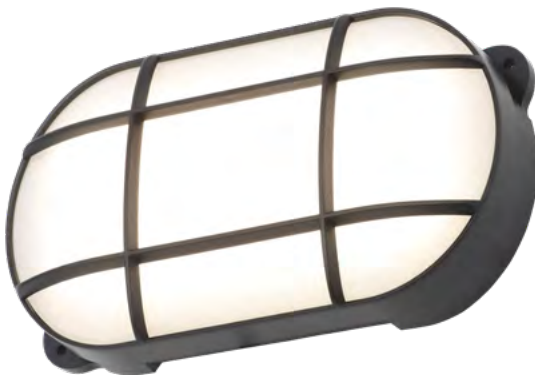

CAPELLA

Oval Grid Bulkhead



IP65
Rated



4000K
CW




Class 2

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34026-BLK	Small	Capella Oval Grid Bulkhead	8W	4000k	400	50	H:115mm W:160mm Proj:57mm
CZ-34027-BLK	Large		15W	4000k	750	50	H:135mm W:210mm Proj:57mm

750
Lumens

IP65

- Black PC / Opal diffuser
- Corrosion resistant
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000



CAPELLA

Round Grid Bulkhead



IP65
Rated



4000K
CW




Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34025-BLK	Capella Round Grid Bulkhead	15W	4000k	750	50	Proj:57mm Dia:165mm



IP44

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



MARS

Round Bulkhead




Code	Description	Lamp	Dimensions
CZ-20947-BLK	Mars Round Bulkhead	1 x 10W max LED E27 GLS	Proj:100mm Dia:180mm



IP44

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



PUCK

Oval Eyelid Bulkhead



Code	Description	Lamp	Dimensions
CZ-25142-BLK	Puck Oval Eyelid Bulkhead	1 x 10W max LED E27 GLS	Proj:110mm W:260mm H:150mm



CZ-34023-BLK

Upto
750
Lumens

IP65



- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted
- 6m Detection Distance

CZ-33397-BLK

- 8W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 50
- Hrs: 25,000

CZ-34023-BLK

- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000

CANO

LED Round Bulkhead



IP65
Rated



4000K
CW



PIR
Sensor



Class 2

Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-33397-BLK	Small	Cano Round PIR Bulkhead	8W	4000k	400	50	Proj:57mm Dia:155mm
CZ-34023-BLK	Large		15W	4000k	750	50	Proj:60mm Dia:195mm






Upto
1200
Lumens



IP65



- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Push-fit connectors



TURUS

LED Round Bulkhead




Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34014-BLK	–	Turus Round Bulkhead	15W	CCT	1200	80	Proj:50mm Dia:170mm
CZ-34015-BLK	PIR		15W	CCT	840	56	Proj:50mm Dia:170mm

Upto
1200
Lumens

IP65



- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000
- Push-fit connectors



TURUS

LED Oval Bulkhead




Code	Sensor	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-34016-BLK	-	Turus Oval Bulkhead	15W	CCT	1200	80	H:210mm W:115mm Proj:50mm
CZ-34017-BLK	PIR	Turus Oval Bulkhead	15W	CCT	840	56	H:210mm W:115mm Proj:50mm

590
Lumens

IP65

- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 73
- Hrs: 20,000



OXFORD

Round LED Bulkhead



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31750-BLK	Oxford Round Bulkhead	8W	4000k	590	73	Proj:83mm Dia:213mm

- Polycarbonate construction
- Corrosion resistant
- Can be wall or ceiling mounted

CZ-31745-BLK

- 15W LED module (SMD)
- Lm/W: 60
- Hrs: 20,000


CZ-31743-BLK

- 18W LED module (SMD)
- Lm/W: 70
- Hrs: 20,000



**Upto
1245
Lumens**

IP65



RIPON

LED Bulkhead




Code	Size	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31745-BLK	Small	Ripon LED Bulkhead	15W	4000k	900	60	Proj:44mm Dia:270mm
CZ-31743-BLK	Large		18W	4000k	1245	70	Proj:44mm Dia:310mm



**510
Lumens**

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 63
- Hrs: 20,000

OXFORD

Oval LED Bulkhead




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31751-BLK	Oxford Oval Bulkhead	8W	4000k	510	63	H:142mm W: 213mm Proj:79mm

648
Lumens

IP65



- Polycarbonate and ABS construction
- Corrosion resistant
- 12W LED module (SMD)
- Lm/W: 64
- Hrs: 20,000



LUTON

LED Wedge




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31746-BLK	Luton LED Wedge	12W	4000k	648	64	Proj:99mm W:265mm H:98mm

IP65

1260
Lumens



- Corrosion resistant PC & ABS construction
- Adjustable sensitivity, hold time, lux level, standby time & standby dim level.
- Microwave & daylight Sensor



DERBY

LED Wedge with Hi-Lo Dimmer




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31740-BLK	Derby LED Wedge with Hi-Lo Dimmer	21W	4000k	1260	60	Proj:139mm W:320mm H:138mm



IP44

- ABS construction
- Corrosion resistant



IONA

Downlight




Code	Description	Lamp	Dimensions
CZ-35704-BLK	Iona Downlight	1 x 5W Max LED GU10	Proj:90mm W:70mm H:95mm



IP44

- ABS construction
- Corrosion resistant



IONA

Up/Down Wall Light




Code	Description	Lamp	Dimensions
CZ-35705-BLK	Iona Up/Down Wall Light	2 x 5W Max LED GU10	Proj:95mm W:70mm H:150mm

IP65



- Polycarbonate construction
- Corrosion resistant
- PIR sensor
- 6m Detection Distance



NESO

Up/Down Wall Light with PIR



IP65
Rated



PIR
Sensor




Class 2

Code	Description	Lamp	Dimensions
CZ-31744-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:63mm H:205mm

IP65



- Polycarbonate construction
- Corrosion resistant



NESO

Up/Down Wall Light



IP65
Rated




Class 2

Code	Description	Lamp	Dimensions
CZ-25144-BLK	Neso Up/Down Wall Light	2 x 7W Max LED GU10	Proj:110mm W:81mm H:160mm

IP65




- Polycarbonate construction
- Corrosion resistant



NESO

Downlight




Code	Description	Lamp	Dimensions
CZ-25143-BLK	Neso Downlight	1 x 7W Max LED GU10	Proj:86mm W:81mm H:122mm



IP44



- Marine grade stainless steel (316) construction
- Corrosion resistant



ISLAY

Up/Down Wall Light




Code	Description	Finish	Lamp	Dimensions
CZ-29320-SST	Islay Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:160mm W:70mm Proj:120mm
CZ-29320-BLK		Black		
CZ-29320-ANTH		Anthracite		





- Marine grade stainless steel (316) construction
- Corrosion resistant
- PIR sensor
- Adjustable lux and timer
- Detection Angle: 90°
- Detection Distance: 7m



ISLAY


PIR Up/Down Wall Light



Code	Description	Finish	Lamp	Dimensions
CZ-29319-SST	Islay PIR Up/Down Wall Light	Stainless Steel	2 x 7W max LED GU10	H:143mm W:60mm Proj:125mm
CZ-29319-BLK		Black		
CZ-29319-ANTH		Anthracite		



- Marine grade stainless steel (316) construction
- Corrosion resistant



ISLAY

Spotlight



Code	Description	Finish	Lamp	Dimensions
CZ-29321-SST	Islay Spotlight	Stainless Steel	1 x 7W max LED GU10	H:87mm W:60mm Proj:177mm
CZ-29321-BLK		Black		
CZ-29321-ANTH		Anthracite		






280
Lumens

IP65

- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000



BREEZ

Surface Brick/Guide Light



IP65
Rated



4000K
CW



Class 2



0.19kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29192-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm



180
Lumens

IP65

- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 2W LED module (SMD)
- Lm/W: 90
- Hrs: 20,000



BREEZ

Surface Brick/Guide Light



IP65
Rated



4000K
CW



Class 2



0.16kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29193-ATR	Breez Surface Brick/Guide Light	2W	4000k	180	90	Proj:30mm Dia:128mm




280
Lumens

IP65



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000



BREEZ

Surface Brick/Guide Light




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-29191-ATR	Breez Surface Brick/Guide Light	3W	4000k	290	93	Proj:30mm W:210mm H:85mm



**590
Lumens**

IP65

- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000



POOLE

LED Up/Down Wall Light



IP65
Rated



4000K
CW



Class 2



0.32kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31749-BLK	Poole LED Up/Down Wall Light	12.5W	4000k	590	47	Proj:78mm W:230mm H:110mm




IP65

**300
Lumens**



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- PIR sensor (option)
- 6m detection range
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000



POOLE

LED Wall Downlight



PIR
Sensor



IP65
Rated



4000K
CW



Class 2



0.32kg


Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
CZ-31752-BLK	Poole Downlight	6W	4000k	300	50	Proj:51mm W:220mm H:113mm
CZ-31747-BLK	Poole Downlight with PIR	6.5W	4000k	300	46	Proj:51mm W:220mm H:113mm



IP44



- Polycarbonate construction
- Corrosion resistant
- Detachable ground spike



WELLS

Dual Mount Ground/Spike Light



Code	Description	Lamp	Dimensions
CZ-31806-BLK	Wells Ground Light	1 x 6W Max LED GU10	Proj:130mm Dia:80mm H:273mm

NEW

Upto
9000
Lumens

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



VISBY

LED Slimline Floodlight



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-41087-BLK	Visby LED Slimline Floodlight	20W LED	1500	0.24kg	H:90mm W:120mm Proj:95mm
CZ-41088-BLK		30W LED	2500	0.35kg	H:125mm W:190mm Proj:95mm
CZ-41089-BLK		50W LED	4100	0.59kg	H:155mm W:195mm Proj:120mm
CZ-41090-BLK		100W LED	9000	0.87kg	H:190mm W:260mm Proj:120mm

NEW

Upto
4100
Lumens

IP54



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



TROSA

LED Slimline Floodlight with PIR Sensor



PIR
Sensor



IP54
Rated



180°
Beam



6500K
DW



0.5M
Cable



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
CZ-41091-BLK	Trosa LED Slimline Floodlight with PIR Sensor	20W LED	1500	0.27kg	H:155mm W:120mm Proj:120mm
CZ-41092-BLK		30W LED	2500	0.38kg	H:190mm W:160mm Proj:115mm
CZ-41093-BLK		50W LED	4100	0.64kg	H:225mm W:195mm Proj:160mm





ELECTRALITE

COMMERCIAL

Great quality and installer friendly LED Commercial lighting, including our NEW LED range of tapes, downlights, bulkheads and battens.

LED STRIP	184-193
LED STRIP ACCESSORIES	194-199
UNDER CABINET	200
LED BATTENS	201-203
T-GRID LIGHTING	204-205
RECESSED	206-213

PROFESSIONAL 24V LED STRIPS



3M 200MP high performance acrylic adhesives used on all professional LED strips.

Our high grade 24V LED strips are ideal if you require 5 metres or more in a single length. Built from the highest specification components, they are consistent in brightness and reliability as there is less current. Therefore less voltage drop and less wiring is required. 24V strips or tapes are the choice of the professional installer.

How to choose an LED strip

1. Choose LED type

Choose from White LED (single colour), or RGBW LED (16 selectable colour options). Available in a range of different variants to suit all applications.

2. Choose colour temperature

Choose from warm white, cool white and daylight white LED colour temperatures to suit your application. For RGB skip to step 3.

3. Choose installation environment

Select the protection you require for the installation environment. Choose from IP65 water resistant LED strip for wet areas or IP20 non water resistant LED strip for dry areas.

4. Choose profile

Designed to hold your LED strip, providing diffusion and protection. We offer a range of profiles, including surface mounted, recessed and corner mounted.

5. Choose your driver

Calculate the overall wattage of the LED strip to be used. Then select the driver that is higher in wattage than your LED strip (tape).

6. Accessories

We offer strip connectors and strip live-end connectors for our full range of LED strip, enabling you to cut and size your strip for any application or even extend LED strip where required.

7. Remote control receivers

Remote controlled receivers offer precise and user-friendly control over integral LED strip lighting, allowing you to change the colour and brightness of your room with the touch of a finger.

560
Lumens

6W
LED

IP20

3M
200MP




- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

5m
50m

IP20 8MM 6W

LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34280	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34281	Cool White	4000K	588						
ELA-34282	Daylight White	6000K	569						
ELA-34857	Warm White	2700K	525						50m
ELA-34858	Cool White	4000K	588						
ELA-34859	Daylight White	6000K	569						

185





560
Lumens

6W
LED

IP65

3M
200MP


- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

5m

50m

IP65 8MM 6W

LED Strip



Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34283	Warm White	2700K	525	5.76W p/m	60	SMD2835	8mm	>80	5m
ELA-34284	Cool White	4000K	588						
ELA-34285	Daylight White	6000K	569						
ELA-34860	Warm White	2700K	525						50m
ELA-34861	Cool White	4000K	588						
ELA-34862	Daylight White	6000K	569						

1000
Lumens

12W
LED

IP20

3M
200MP



- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m
50m

IP20 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34290	RGB	IP20	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34871									50m



**1000
Lumens**

**12W
LED**

IP65


3M
200MP



- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

**5m
50m**

IP65 10MM RGB 12W LED Strip



Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34291	RGB	IP65	1000	11.52W p/m	60	SMD5050	10mm	>80	5m
ELA-34872									50m





1000
Lumens

19.2W
LED

IP65


3M
200MP



- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB/CCT remote control & receiver (page .100)

5m
50m

IP65 12MM RGB/CCT 19.2W LED Strip


IP65
Rated


120°
Beam

Code	LED Colour	IP Rating	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-34296	RGB/CCT	IP65	1000	19.2W p/m	60	SMD5050	12mm	>80	5m
ELA-34873									50m






- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut every 62.5mm
- More flexible than SMD LED strip
- Spot free lighting array
- Very high colour rendering index producing true light colour RA>90. RA90
- Dimmable with receiver (page .100)



COB IP20 8MM 12W LED Strip




Code	LED Colour	Kelvin	Lumen / Metre	Power W / Metre	LEDs / Metre	LED Type	Strip Width	CRI	Roll Length
ELA-35750	Warm White	3000K	896	12W p/m	512	COB	8mm	>90	5m
ELA-35751	Cool White	4000K	934						50m
ELA-35752	Warm White	3000K	896						
ELA-35753	Cool White	4000K	934						

ALUMINIUM PROFILES



- Fits 8mm, 10mm & 12mm LED Strip

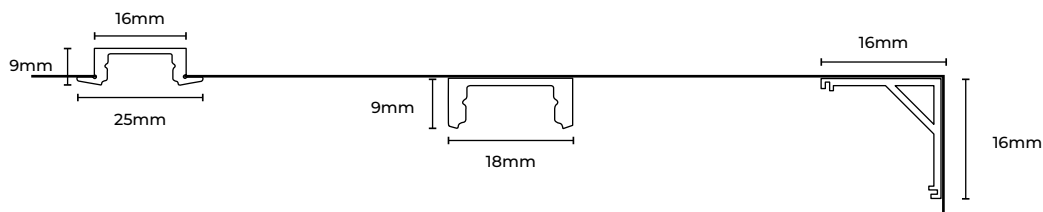

Recessed



ELA-34308

Surface-mount



ELA-34306

Corner



ELA-34307

Code	Description	Dimensions
ELA-34308	Aluminium Recessed Profile	L:2000mm W:25mm Proj:9mm
ELA-34306	Aluminium Surface-mount Profile	L:2000mm W:18mm Proj:9mm
ELA-34307	Aluminium 45° Corner Surface-mount Profile	L:2000mm W:16mm Proj:16mm

LED DRIVERS

Constant Voltage

ELA-36974



ELA-36975



ELA-34302



ELA-34301



ELA-34303



ELA-34300



ELA-34304



ELA-34305



Code	Description	Weight	Dimensions
ELA-36974	LED Driver Constant Voltage 24V 10W	-	-
ELA-36975	LED Driver Constant Voltage 24V 20W	-	-
ELA-34300	LED Driver Constant Voltage 24V 36W	0.13kg	H:48mm W:45mm L:140mm
ELA-34301	LED Driver Constant Voltage 24V 60W	0.17kg	H:20mm W:40mm L:140mm
ELA-34302	LED Driver Constant Voltage 24V 100W	0.24kg	H:28mm W:61mm L:178mm
ELA-34303	IP67 LED Driver Constant Voltage 24V 60W	0.42kg	H:30mm W:58mm L:200mm
ELA-34304	IP67 LED Driver Constant Voltage 24V 150W	0.81kg	H:58mm W:82mm L:260mm
ELA-34305	IP67 LED Driver Constant Voltage 24V 200W	0.81kg	H:58mm W:82mm L:260mm

LED RECEIVERS

Remote Control

ELA-34286



ELA-34287



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour LED strip
- Smooth dimming and switch without any flickering

ELA-34292



ELA-34293



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour/ RGB/RGBW LED strip
- Smooth dimming and switch without any flickering

Code	Description	Dimensions
ELA-34286	1 Channel LED Receiver	H:20mm W:37mm L:115mm
ELA-34287	1 Zone Programmable Remote Control	H:9mm W:59mm L:107mm
ELA-34292	4 Channel RGB LED Receiver	H:20mm W:37mm L:115mm
ELA-34293	4 Zones Programmable RGB/W Remote Control	H:9mm W:59mm L:107mm

RGB/CCT Controller

- Wi-Fi controller, Use Smartlife/Tuya App to control your strip through your phone**
- Kit includes Remote and controller
- RF(radio frequency) not IR (infra-red)
- Touch wheel for easy colour change
- RGB & CCT function
- Over 16 million colours to choose from
- Pre-set dynamic mode
- 0-100% brightness
- 30 meter control distance



Code	Description	Dimensions
ELA-38126	RGB/CCT LED Strip Controller & Remote Control	L:120mm W:44mm H:27mm

WALL MOUNTED TOUCH CONTROLLERS

240V Mains Powered



Wall panel enables control of up to 4 zones of Single Colour, Tunable White, RGB, RGBW and RGCCT LED strip, featuring simple to use back-lit touch controls for easy brightness adjustment.

Code	Description
ELA-37513	Mains Wall Mounted Touch Panel - White
ELA-37514	Mains Wall Mounted Touch Panel - Black

WALL MOUNTED TOUCH CONTROLLERS

Battery Powered




Wireless wall panel enables control of up to 4 zones of Single Colour, Tunable White, RGB, RGBW and RGCCT LED strip, featuring simple to use back-lit touch controls for easy brightness adjustment.

Code	Description
ELA-37515	Battery Wall Mounted Touch Panel - White
ELA-37516	Battery Wall Mounted Touch Panel - Black

LED STRIP CONNECTORS

Solder Free

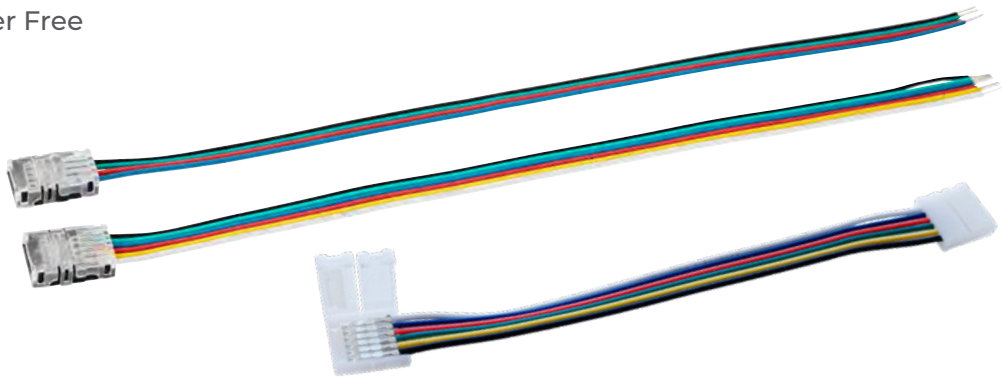

- Solder free
- Easy installation
- Clips pierce from under the strip to prevent loosening

Code	Description	Fits
ELA-35748		RGB LED Strip
ELA-35749		RGB/CCT LED Strip
ELA-34876		12mm Strip

PUSH FIT CONNECTORS

Solder Free



Code	Description
ELA-37517	L Shape Connection PCB 8mm, 2 Pin Single Colour IP20 , 12-24v 3a Max
ELA-37518	L Shape Connection PCB 10mm, 4 Pin RGB IP20 , 12-24v 3a Max
ELA-37519	T Shape Connection PCB 10mm, 4 Pin RGB IP20 , 12-24v 3a Max
ELA-37520	T Shape Connection PCB 10mm, 4 Pin RGB IP20 , 12-24v 3a Max
ELA-37521	X Shape Connection PCB 8mm, 2 Pin Single Colour IP20 , 12-24v 3a Max
ELA-37522	X Shape Connection PCB 10mm, 4 Pin RGB IP20 , 12-24v 3a Max

LED STRIP CONNECTORS

Solder Free

NEW
FOR
2023



ELA-41718



ELA-41720



ELA-41722



ELA-41724



ELA-41726



ELA-41728



ELA-41719



ELA-41721



ELA-41723



ELA-41725



ELA-41727





ELA-41729

Code	Description	Fits
ELA-41718	Wire To Strip Connector 2PIN 8MM PCB	8mm Strip
ELA-41719	Strip To Strip Connector Easy Fit 2PIN 8MM PCB	
ELA-41720	Strip To Wire to Strip Connector 2PIN 8MM PCB	
ELA-41721	Wire To Strip Connector Easy Fit 2PIN 8MM PCB	
ELA-41722	Wire To Strip Connector 4PIN 10MM PCB	10mm Strip
ELA-41723	Strip To Strip Connector Easy Fit 4PIN 10MM PCB	
ELA-41724	Strip To Wire To Strip Connector 4PIN 10MM PCB	
ELA-41725	Wire To Strip Connector Easy Fit 4PIN 10MM PCB	
ELA-41726	Wire To Strip Connector 6PIN 12MM PCB	12mm Strip
ELA-41727	Strip To Strip Connector Easy Fit 6PIN 12MM PCB	
ELA-41728	Strip To Wire To Strip Connector 6PIN 12MM PCB	
ELA-41729	Wire To Strip Connector Easy Fit 6PIN 12MM PCB	



Ultra slim LED under cabinet lights ideal for kitchen, cabinet, cove lighting or other applications. Linkable end-to-end or using link leads available separately.

- White PC body with opal diffuser
- Switchable between 3000K/4000K/6000K
- ON/OFF rocker switch
- No driver required
- C7 cable type
- Supplied with 2m power lead
- Versatile and simple to install
- Can be mounted horizontally or vertically
- Energy efficient and long life

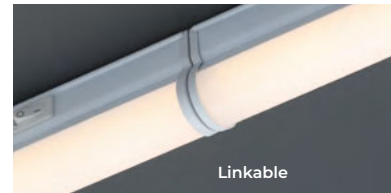

BODHI

CCT Adjustable Under Cabinet Link Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight	Length	Dimensions
ELA-41712	Bodhi Link Light	5W LED	3 CCT	500	0.34kg	312mm	L:312mm W:22mm Proj:36mm
ELA-41713		9W LED	3 CCT	900	0.172kg	611mm	L:611mm W:22mm Proj:36mm
ELA-41714		14W LED	3 CCT	1300	0.210kg	911mm	L:911mm W:22mm Proj:36mm
ELA-41715		18W LED	3 CCT	1700	0.246kg	1210mm	L:1210mm W:22mm Proj:36mm
ELA-21665	Bodhi Link Lead 8 Type	-	-	-	0.30kg	500mm	Length: 500mm
ELA-21666		-	-	-	0.52kg	1000mm	Length: 1000mm



Upto
1200
Lumens

**NO
DRIVER
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm

Upto
6900
Lumens

**NO
DRIVER
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30704	Reno LED Batten	60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm



RENO

Suspension Kit

Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm

GAMMA LED T-GRID LIGHTING SOLUTIONS

The Gamma LED T-Grid is an innovative lighting product solution for T-Grid suspension ceilings. Engineered to work with 15mm, 24mm and 25mm T-Grid ceiling structures in order to minimise building materials and waste. Also helping reduce installation costs and improve ceiling appearance.

Works with different tile edges:

15mm T-Grid Bar







24mm T-Grid Bar



Remarkable installation savings:

Installation steps:



Upto
3700
Lumens



- An innovative lighting fixture that takes the place of LED panels
- Engineered to work with 15mm , 24mm & 25mm T-Grid ceilings
- Simple to install (Up to 60% faster Installation)
- Reduces installation costs
- Even light distribution
- Improves ceiling appearance



GAMMA

LED T-Grid Lighting



Code	Description	PCS	Finish	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Length
ELA-35745	14W T-Grid Kit with Driver	2 Pack	Lens	4000k	1764	126	>80	580mm
ELA-35743	15W T-Grid Kit with Driver	2 Pack	Prismatic	4000k	1545	103	>80	
ELA-35746	28W T-Grid Kit with Driver	1 Pack	Lens	4000k	3696	132	>80	1180mm
ELA-35744	30W T-Grid Kit with Driver	1 Pack	Prismatic	4000k	2970	99	>80	



NEW

700
Lumens

IP65

FAST
FIT

CCT



- Dimmable
- Fire rated
- Fast fit terminals
- Available in 3 pack or single
- 5W LED module (COB)

- K: 4000
- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



EDEN

IP65 Tiltable Fire-rated Downlight



Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41111-WHT	Single	White	7W	700	100	3 CCT	Dia:87mm H:30mm Cutout:70mm
SPA-41111-BLK		Black					
SPA-41111-CHR		Chrome					
SPA-41111-SBRS		Satin Brass					



NEW

900
Lumens

4 CCT

FAST
FIT



- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K 3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



JENN

Anti-glare Fire-rated Downlight



Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41112-BLK/WHT	Black/White	8W	900	112.5	4 CCT	Dia:84mm H:65mm Cutout:70mm

**500
Lumens**

IP65

**FAST
FIT**



- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



COMO

IP65 Tiltable Fire-rated Downlight




Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38570/38571-ACOP	3 Pack/ Single	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
SPA-38570/38571-BCHR		Black Chrome					
SPA-38570/38571-CHR		Chrome					
SPA-38570/38571-MWHT		Matt White					
SPA-38570/38571-SBLK		Satin Black					
SPA-38570/38571-SBRS		Satin Brass					
SPA-38570/38571-SNIC		Satin nickel					



900
Lumens



FAST
FIT



- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000



RHOM

IP65 Fixed Fire-rated Downlight



Fire-rated



IP65
Rated



60°
Beam



70mm
Cut-out



CCT



Class 2



0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (K)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					

FAST
FIT



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Adjustable Fire Rated Downlight



Fire-rated



IP20
Rated



85mm
Cut-out



Class 1

Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

FAST
FIT




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

FAST
FIT

IP65




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø60mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				



BATHROOM

A beautiful range of decorative lighting and mirrors, designed to brighten any bathroom.

CEILING/WALL	216-258
SPOTLIGHTS	259-261
FLUSH	262-268
RECESSED	269-277
WALL	278-282
MIRRORS	283-293
SMART TOILETS	294-295

NEW
FOR
2023

IP44



- Stainless steel and glass construction
- Available in 3 finishes
- Ceiling cup fits into recess at top of shade to enable fitting to be used as a semi-flush



TULIP

Glass Pendant/Semi-Flush



IP44
Rated



Class 2



1.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-41223-CHR	Chrome	Bryn Glass Tulip Pendant	1 x 10W max LED E27 GLS	Max Height: 1295mm Min Height: 295mm Dia:205mm
SPA-41224-SBRS	Satin Brass	Rhys Glass Tulip Pendant		
SPA-41225-SBLK	Satin Black	Dylan Glass Tulip Pendant		

NEW
FOR
2023

900
Lumens

IP44



- Steel construction with opal glass shade
- Available in 3 finishes
- 12W LED module (SMD)
- Lm/W: 75
- CRI: 80



OPIE

LED Glass Dome Flush




Code	Finish		Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-41694-MBLK	Matt Black		Opie LED Glass Dome Flush	12W	4000k	900	H:110mm Dia:300mm
SPA-41694-CHR	Chrome						
SPA-41694-SNIC	Satin Nickel						

280
Lumens

IP44

- Aluminium construction with opal glass shade
- Available in 3 finishes
- 3W LED module (SMD)
- Lm/W: 93
- CRI: 80



AGIOS

LED Bathroom Wall Light



IP44
Rated



Non
Dimmable



4000K
CW



Class 1




0.6kg



Available in
3 colour options

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-38573-TBLK	Textured Black	Agios Bathroom Wall Light	3W	4000k	280	H:190mm W:130mm Proj:180mm
SPA-38573-CHR	Chrome					
SPA-38573-SBRS	Satin Brass					

IP44



- Contemporary bathroom wall light
- Available in 3 finishes

THIVA

Bathroom Wall Light



IP44
Rated



Class 1



0.5kg



Available in
3 colour options


Code	Finish	Description	Lamp	Dimensions
SPA-38576-TBLK	Textured Black	Thiva Bathroom Wall Light	1 x 3W max LED G9	H:167mm W:160mm Proj:167mm
SPA-38576-CHR	Chrome			
SPA-38576-SBRS	Satin Brass			



400
Lumens

IP44

- Crackle effect diffuser
- 5W LED module (SMD)
- Lm/W: 80
- CRI: 80



RHODES

LED Bathroom Wall Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36300-CHR	Chrome	Rhodes LED Wall Light	5W	4000k	400	H:220mm W:100mm Proj:140mm



800
Lumens

IP44

- Crackle effect diffuser
- 10W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 80
- CRI: 80



RHODES


LED Bathroom 2 Light Wall Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36301-CHR	Chrome	Rhodes LED 2 Light Wall Light	10W	4000k	800	H:220mm W:250mm Proj:140mm

500
Lumens

IP44



• Matching ceiling lights available

EDESSA
LED Wall Light

IP44
Rated

4000K
CW


Class 1

0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36309-CHR	Chrome	Edessa LED 2 Light Wall Light	10W	4000k	500	H:320mm W:225mm Proj:50mm

Upto
1200
Lumens

IP44

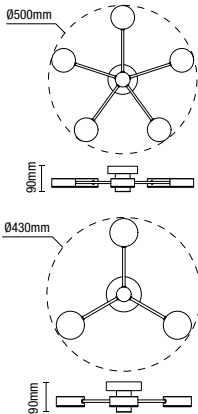

• Matching wall light available

EDESSA
LED Ceiling Light

IP44
Rated

4000K
CW

Class 1


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36310-CHR	Chrome	Edessa 3 Light Ceiling Light	15W	4000k	800	H:90mm Dia:430mm	0.7kg
SPA-36311-CHR	Chrome	Edessa 5 Light Ceiling Light	25W	4000k	1200	H:90mm Dia:500mm	1kg



Upto
1400
Lumens

IP44

- Crackle effect diffuser
- Matching wall light available

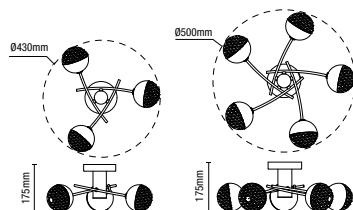

RHODES

LED Ceiling Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions	Weight
SPA-36302-CHR	Chrome	Rhodes 3 Light Ceiling Light	15W	4000k	900	H:175mm Dia:430mm	1.15kg
SPA-36303-CHR	Chrome	Rhodes 5 Light Ceiling Light	24W	4000k	1400	H:175mm Dia:500mm	1.55kg



IP44



- Contemporary bathroom wall light
- Steel construction with glass opal shades



PARGA

Bathroom Wall Light




Code	Finish	Description	Lamp	Dimensions	Weight
SPA-38574-CHR	Chrome	Parga 1 Light Wall Light	1 x 3W max LED G9	H:131mm W:130mm Proj:132mm	0.35kg
SPA-38575-CHR	Chrome	Parga 3 Light Wall Light	3 x 3W max LED G9	H:131mm W:450mm Proj:132mm	1.05kg

IP44



- Contemporary bathroom wall light
- Diamond cut glass designed shades



VOLOS

Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-35808-CHR	Chrome	Volos 2 Light Wall Light	2 x 3W max LED G9	H:330mm W:150mm Proj:105mm

IP44



- Contemporary bathroom ceiling light
- Diamond cut glass designed shades

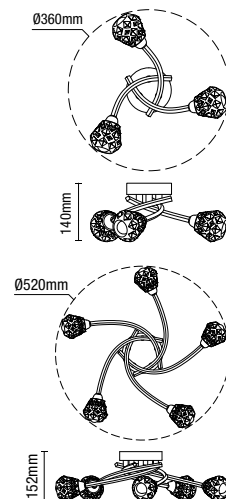

VOLOS

Ceiling Light




Code	Finish	Description	Lamp	Dimensions	Weight
SPA-35782-CHR	Chrome	Volos 3 Light Ceiling Light	3 x 3W max LED G9	H:140mm Dia:360mm	1.15kg
SPA-35783-CHR	Chrome	Volos 5 Light Ceiling Light	5 x 3W max LED G9	H:152mm Dia:520mm	2.05kg



IP44

- Available in satin brass/champagne glass or chrome/smoked glass



PATRAS

3 Light Plate Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35809-CHAMP	Satin Brass/Champagne	Patras 3 Light Plate Ceiling Light	3 x 3W max LED G9	H:115mm Dia:230mm
SPA-35809-CHR	Chrome/Smoke			



IP44

- Available in satin brass/champagne glass or chrome/smoked glass




PATRAS

4 Light Bar Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35810-CHAMP	Satin Brass/Champagne	Patras 4 Light Bar Ceiling Light	4 x 3W max LED G9	H:115mm W:460mm Proj:100mm
SPA-35810-CHR	Chrome/Smoke			

IP44



- Available in satin brass/champagne glass or chrome/smoked glass


PATRAS

1 Light Wall Light



Code	Finish	Description	Lamp	Dimensions
SPA-35811-CHAMP	Satin Brass/Champagne	Patras 1 Light Wall Light	1 x 3W max LED G9	H:185mm W:110mm Proj:135mm
SPA-35811-CHR	Chrome/Smoke			

IP44



- Twisted style glass shades
- Available in satin brass or chrome

VERIA

2 Light Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-35830-SBRS	Satin Brass/Clear	Veria 2 Light Wall Light	2 x 3W max LED G9	H:320mm W:245mm Proj:135mm
SPA-35830-CHR	Chrome/Smoke			

IP44



- Twisted style glass shades
- Available in satin brass or chrome



VERIA

3 Light Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35828-SBRS	Satin Brass/Clear	Veria 3 Light Ceiling Light	3 x 3W max LED G9	H:170mm Dia:390mm
SPA-35828-CHR	Chrome/Smoke			

IP44



- Twisted style glass shades
- Available in satin brass or chrome




VERIA

5 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35829-SBRS	Satin Brass/Clear	Veria 5 Light Ceiling Light	3 x 3W max LED G9	H:195mm Dia:480mm
SPA-35829-CHR	Chrome/Smoke			

IP44



- Available in chrome or satin brass

LINDOS

3 Light Ceiling Light



IP44
Rated




Class 1



1.0kg

Code	Finish	Description	Lamp	Dimensions
SPA-35836-CHR	Chrome/Smoke	Lindos 3 Light Ceiling Light	3 x 3W max LED G9	H:265mm Dia:390mm
SPA-35836-SBRS	Satin Brass/Opal			

IP44



- Available in chrome or satin brass

LINDOS

5 Light Ceiling Light



IP44
Rated



Class 1




1.0kg

Code	Finish	Description	Lamp	Dimensions
SPA-35837-CHR	Chrome/Smoke	Lindos 5 Light Ceiling Light	5 x 3W max LED G9	H:275mm Dia:465mm
SPA-35837-SBRS	Satin Brass/Opal			

IP44



• Available in chrome or satin brass




LINDOS

2 Light Wall Light



Code	Finish	Description	Lamp	Dimensions
SPA-35838-CHR	Chrome/Smoke	Lindos 2 Light Wall Light	2 x 3W max LED G9	H:325mm W:210mm Proj:120mm
SPA-35838-SBRS	Satin Brass/Opal			

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets


MEGARA

3 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-35840-CLR	Chrome/Clear	Megara 3 Light Ceiling Light	3 x 3W max LED G9	H:126mm Dia:320mm
SPA-35840-SMK	Chrome/Smoke			

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

MEGARA

5 Light Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35841-CLR	Chrome/Clear	Megara 5 Light Ceiling Light	5 x 3W max LED G9	H:126mm Dia:350mm
SPA-35841-SMK	Chrome/Smoke			



IP44

- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets



MEGARA

2 Light Cloche Ceiling Light




Code	Finish	Description	Lamp	Dimensions
SPA-35839-CLR	Chrome/Clear	Megara 2 Light Cloche Ceiling Light	2 x 3W max LED G9	H:250mm Dia:200mm
SPA-35839-SMK	Chrome/Smoke			



IP44

- Available in chrome or satin brass



SPARTI

Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-35843-CHR	Chrome	Sparti Wall Light	1 x 3W max LED G9	H:270mm W:110mm Proj:120mm
SPA-35843-SBRS	Satin Brass			

900
Lumens

IP44



- 26W LED module (SMD)
- Lm/W: 34
- CRI: 80



CHIOS

LED Ceiling Light



IP44
Rated



Non
Dimmable



4000K
CW



Class 2



0.8kg


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36129-CHR	Chrome	Chios LED Ceiling Light	26W	4000k	900	H:56mm Dia:400mm



**1000
Lumens**

IP44

- 32W LED module (SMD)
- Lm/W: 34
- CRI: 80



DAFNI

LED Ceiling Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36130-MBLK	Matt Black	Dafni LED Ceiling Light	32W	4000k	1100	H:190mm W:830mm Proj:240mm



**400
Lumens**

IP44

- 11W LED module (SMD)
- Lm/W: 36
- CRI: 80

MANDRA

LED Ceiling Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SPA-36140-CHR	Chrome	Mandra LED Ceiling Light	11W	4000k	400	H:130mm Dia:340mm



IP44



- Chrome finish
- Decorative chiselled glass droplets

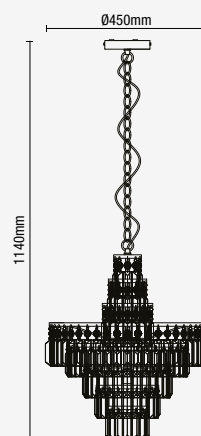

BELLE

4 Light Chandelier




Code	Description	Lamp	Dimensions
SPA-24677-CHR	Belle 4 Light Chandelier	4 x 3W max LED C9	H:1140mm Dia:450mm

IP44



- Chrome finish
- Decorative chiselled glass droplets



BELLE

3 Light Semi Flush



IP44
Rated



Class 1



3.5kg

Code	Description	Lamp	Dimensions
SPA-24678-CHR	Belle 3 Light Semi-flush	3 x 3W max LED G9	H:398mm Dia:300mm

IP44



- Chrome finish
- Clear crystal shades
- Adjustable chain length

PEGASI

9 Light Chandelier



Code	Description	Lamp	Dimensions
SPA-33929-CHR	Pegasi 9 Light Chandelier	9 x 3W max LED G9	H:1200mm Dia:550mm



IP44



- Chrome finish
- Clear crystal shades

PEGASI

5 Light Flush Chandelier

IP44
Rated


Class 1

Code	Description	Lamp	Weight	Dimensions
SPA-33930-CHR	Pegasi 5 Light Flush	5 x 3W max LED G9	3.58kg	H:390mm Dia:480mm

IP44



- Chrome finish
- Clear crystal shades




PEGASI

3 Light Flush Chandelier




Code	Description	Lamp	Dimensions
SPA-33974-CHR	Pegasi 3 Light Semi-flush	3 x 3W max LED G9	H:370mm Dia:460mm



SPA-33931-CHR

- Chrome finish
- Clear crystal shades

IP44



SPA-33932-CHR

PEGASI

Wall Light



Code	Description	Lamp	Weight	Dimensions
SPA-33931-CHR	Pegasi Shield Wall Light	1 x 3W max LED G9	1.25kg	H:200mm W:160mm Proj:82mm
SPA-33932-CHR	Pegasi Wall Light	1 x 3W max LED G9	0.77kg	H:195mm W:110mm Proj:175mm



IP44



- Clear glass crystal droplets
- Available in chrome & brass

VELA

9 Light Chandelier



IP44
Rated



Class 1



6.4kg

Code	Finish	Description	Lamp	Dimensions
SPA-19714-CHR	Chrome	Vela 9 Light Chandelier	9 x 3W max LED G9	H:1060mm Dia:580mm
SPA-19714-BRS	Brass			



IP44



- Clear glass crystal droplets
- Available in chrome & brass



VELA

Flush Chandelier



IP44
Rated




Class 1



3.9kg

Code	Finish	Description	Lamp	Dimensions
SPA-19713-CHR	Chrome	Vela 5 Light Flush	5 x 3W max LED G9	H:620mm Dia:500mm
SPA-19713-BRS	Brass			

IP44



- Clear glass crystal droplets
- Available in chrome & brass



VELA

Flush Chandelier



IP44
Rated




Class 1



2.6kg

Code	Finish	Description	Lamp	Dimensions
SPA-20182-CHR	Chrome	Vela 3 Light Flush	3 x 3W max LED G9	H:520mm Dia:450mm
SPA-20182-BRS	Brass			

IP44

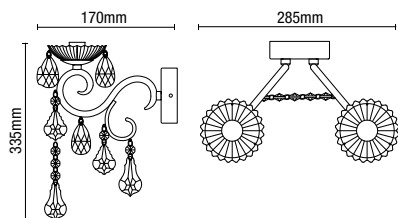

- Clear glass crystal droplets
- Available in chrome & brass



VELA

Wall Light




Code	Finish	Description	Lamp	Dimensions
SPA-20831-CHR	Chrome	Vela Wall Light	2 x 3W max LED G9	Proj:170mm W:285mm H:335mm
SPA-20831-BRS	Brass			

3
SIZES
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

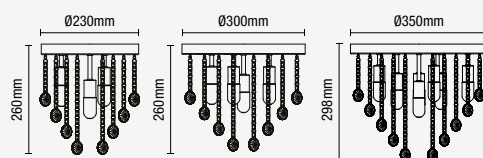

CELESTE

Flush



Code	Finish	Description	Lamp	Dimensions
SPA-24869-CHR	Chrome	Celeste 4 Light Flush	4 x 3W max LED G9	H:260mm Dia:230mm
SPA-24870-CHR		Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-CHR		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm
SPA-24869-BRS	Brass	Celeste 4 Light Flush	4 x 3W max LED G9	H:260mm Dia:230mm
SPA-24870-BRS		Celeste 6 Light Flush	6 x 3W max LED G9	H:260mm Dia:300mm
SPA-24871-BRS		Celeste 9 Light Flush	9 x 3W max LED G9	H:298mm Dia:350mm

2
SIZES
AVAILABLE

IP44



- Clear glass crystal droplets
- Available in chrome & brass

ORLANDO

Flush




Code	Finish	Description	Lamp	Weight	Dimensions
SPA-24468-CHR	Chrome	Orlando 4 Light Flush	4 x 3W max LED G9	2.36kg	L:230mm W:230mm H:189mm
SPA-24468-BRS	Brass				
SPA-24467-CHR	Chrome	Orlando 5 Light Flush	5 x 3W max LED G9	4kg	L:300mm W:300mm H:227mm
SPA-24467-BRS	Brass				



IP44



- Chrome finish
- Bulb covers

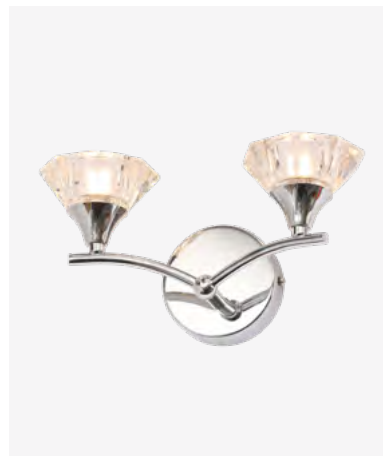

REENA


Ceiling/Wall Light



Code	Description	Lamp	Weight	Dimensions
SPA-28327-CHR	Reena 6 Light Flush	6 x 3W max LED G9	4.4kg	H:220mm Dia:660mm
SPA-28326-CHR	Reena 3 Light Flush	3 x 3W max LED G9	1.7kg	H:190mm Dia:410mm
SPA-29195-CHR	Reena Wall Light	2 x 3W max LED G9	1.0kg	Proj:138mm W:270mm H:140mm



IP44

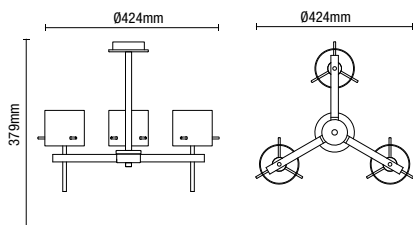

- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



GENE

Ceiling Light



Code	Finish	Description	Lamp	Dimensions
SPA-31726-CHR	Chrome	Gene Cylinder Ceiling Light	3 x 3W max LED G9	H:379mm Dia:424mm
SPA-31726-SATBRS	Satin Brass			



IP44



- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



GENE

Wall Light



IP44
Rated




Class 1



0.55kg

Code	Finish	Description	Lamp	Dimensions
SPA-31725-CHR	Chrome	Gene Cylinder Wall Light	1 x 3W max LED G9	H:205mm W:100mm Proj:165mm
SPA-31725-SATBRS	Satin Brass			



- Opal glass shade
- Matching items available
- Available in 3 finishes



IP44

PORTO

Wall Light



IP44
Rated




Class 1



0.58kg

Code	Finish	Description	Lamp	Dimensions
SPA-31306-CHR	Chrome	Porto 1 Light Wall Light	1 x 3W max LED G9	H:230mm W:120mm Proj:174mm
SPA-31306-MBLK	Matt Black			
SPA-31306-SBRS	Brass			



- 5W LED module (SMD)
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



350
Lumens

IP44

BUBBLE

LED Spotlight



IP44
Rated



4000K
CW




Class 1



0.56kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30781-CHR	Bubble LED Spotlight	5W	3000k	350	70	Proj:140mm W:110mm H:130mm

IP44



- Opal glass shade
- Matching items available
- Available in 3 finishes



PORTO

Semi Flush



IP44
Rated




Class 1




0.95kg

Code	Finish	Description	Lamp	Dimensions
SPA-31309-CHR	Chrome	Porto 1 Light Semi-Flush	1 x 10W max LED E27 GLS	H:340mm Dia:250mm
SPA-31309-MBLK	Matt Black			
SPA-31309-SBRS	Brass			

IP44



- Decorative tubular shades
- Available in 3 finishes



CRUX

3 Light Ceiling Fitting



IP44
Rated




Class 1



1.25kg

Code	Finish	Description	Lamp	Dimensions
SPA-20829-CHR	Chrome	Crux 3 Light Ceiling Fitting	3 x 3W max LED G9	H:225mm Dia:350mm
SPA-20829-MBLK	Matt Black			
SPA-20829-SATBRS	Satin Brass			

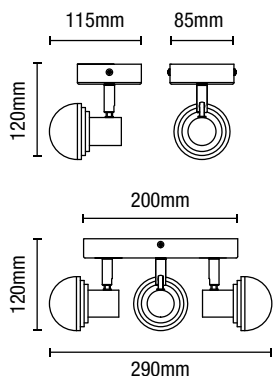

IP44

Upto
960
Lumens

- 5W LED module (SMD) per head
- Lm/W: 64
- CRI: 80
- Hrs: 20,000
- Single spot can be wall or ceiling mounted




MILAN

LED Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31733-CHR	Milan 3 Light Spotlight	15W	3000k	960	64	L:255mm W:290mm H:120mm
SPA-31732-CHR	Milan Single Spotlight	5W	3000k	320	64	Proj:115mm W:85mm H:120mm

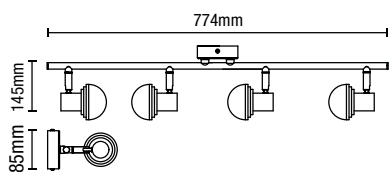

IP44

1280
Lumens

- 4 x 5W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

MILAN

LED 4 Light Bar Spotlight




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31734-CHR	Milan 4 Light Bar Spotlight	20W	3000k	1280	64	L:774mm W:85mm H:145mm

900
Lumens

IP44

- 10W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000



OSLO

Crackle LED Spotlight




Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31730	Oslo Wall Light	10W	3000k	740	90	H:150mm W:90mm Proj:105mm

3600
Lumens

IP44



- 40W LED module (SMD)
- Lm/W: 45
- CRI: 80
- Hrs: 20,000




OSLO

Crackle LED 4 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31731	Oslo 8 Ceiling Fitting	40W	3000k	1800	90	H:105mm W:250mm L:330mm



1100
Lumens

IP44


- 15W LED module (SMD)
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

FELIX

Bubble LED 3 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31735-CHR	Felix 3 Light Bubble Spotlight	15W	4000k	1100	74	H:115mm Dia:200mm



1480
Lumens

IP44

- 20W LED module (SMD)
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

FELIX


Bubble LED 4 Light Spotlight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31780-CHR	Felix Bubble 4 Light Bar	20W	4000k	1480	74	L:774mm W:80mm H:140mm

1350
Lumens

IP44



- Chrome finish with opal acrylic diffusers
- 20W LED module (SMD)
- Lm/W: 67
- CRI: 80
- Hrs: 20,000

AMALFI


LED 4 Light Bar



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31737-CHR	Amalfi 4 Light Bar	20W	4000k	1350	67	L:530mm W:110mm H:65mm

950
Lumens

IP44




- Chrome finish with opal acrylic diffusers
- 15W LED module (SMD)
- Lm/W: 63
- CRI: 80
- Hrs: 20,000

AMALFI

LED 3 Light Flush



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-31736-CHR	Amalfi 3 Light Flush	15W	4000k	950	63	H:65mm Dia:250mm



IP44



- Chrome finish
- Directable spotlights

FREYA

3 Light Spotlight



Code	Description	Lamp	Dimensions
SPA-35080-CHR	Freya 3 Light Spotlight	3 x 7W max LED GU10	H:140mm W:280mm L:220mm

IP44



- Chrome finish
- Directable spotlights

FREYA

4 Light Bar Spotlight




Code	Description	Lamp	Dimensions
SPA-35081-CHR	Freya 4 Light Bar Spotlight	4 x 7W max LED GU10	H:140mm W:620mm L:80mm



- Available in 3 finishes
- Directable spotlights

IP44



SCORPIUS

3 Light Spotlight



IP44
Rated



Class 1



1.27kg

Code	Description	Finish	Lamp	Dimensions
SPA-27405-CHR	Scorpius 3 Light Spotlight	Chrome	3 x 7W max LED GU10	H:140mm W:220mm L:280mm
SPA-27405-MBLK	Scorpius 3 Light Spotlight	Matt Black	3 x 7W max LED GU10	H:140mm W:220mm L:280mm
SPA-27405-BRS	Scorpius 3 Light Spotlight	Brass	3 x 7W max LED GU10	H:140mm W:220mm L:280mm

IP44



- Available in 3 finishes
- Directable spotlights

SCORPIUS

4 Light Bar Spotlight



Code	Finish	Description	Lamp	Dimensions
SPA-22560-CHR	Chrome	Scorpius 4 Light Bar Spotlight	4 x 7W max LED GU10	L:620mm W:80mm H:140mm
SPA-22560-MBLK	Matt Black			
SPA-22560-BRS	Brass			

Upto
900
Lumens

IP44

2
SIZES
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

Small - 180mm

- 12W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 50
- Hrs: 20,000

Large - 310mm

- 18W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 50
- Hrs: 20,000

DELPHI

LED Flush



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-34046-CHR	Chrome	Delphi Small LED Flush	12W	4000k	600	50	>80	H:55mm Dia:180mm
SPA-34046-SNICK	Satin Nickel							
SPA-34046-BRS	Brass							
SPA-34046-SATBLK	Satin Black							
SPA-34047-CHR	Chrome	Delphi Large LED Flush	18W	4000k	900	50	>80	H:85mm Dia:310mm
SPA-34047-SNICK	Satin Nickel							
SPA-34047-BRS	Brass							
SPA-34047-SATBLK	Satin Black							



IP44

2
SIZES
AVAILABLE

- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options



DELPHI

Flush



Code	Finish	Description	Lamp	Dimensions
SPA-34049-CHR	Chrome	Delphi Small Flush	1 x 6W max LED E14 Candle	H:55mm Dia:180mm
SPA-34049-SNIC	Satin Nickel			
SPA-34049-BRS	Brass			
SPA-34049-SATBLK	Satin Black			
SPA-34050-CHR	Chrome	Delphi Large Flush	2 x 10W max E27 GLS	H:85mm Dia:310mm
SPA-34050-SNIC	Satin Nickel			
SPA-34050-BRS	Brass			
SPA-34050-SATBLK	Satin Black			





600
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

6W LED Wall/Ceiling 5 in 1 Light



55-125mm
Cut-out



IP44
Rated



CCT



Class 2

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34008-WHT	White	Tauri LED Light	6W LED	600	0.3kg	H:15mm Dia:139mm
SPA-34010-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 6W model)	-	-	0.11kg	H:15mm Dia:139mm
SPA-34012-CHR	Chrome					
SPA-35711-SBLK	Satin Black					
SPA-35712-SBRS	Satin Brass					



1200
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

12W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35709	White	Tauri LED Light	12W LED	1200	0.42kg	H:15mm Dia:164mm
SPA-35713	Satin Nickel	Tauri Magnetic Ring (Fits 12W model)	-	-	0.17kg	H:15mm Dia:164mm
SPA-35716	Chrome					
SPA-35714	Satin Black					
SPA-35715	Satin Brass					

1800
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

18W LED Wall/Ceiling 5 in 1 Light



55-175mm
Cut-out



IP44
Rated



CCT



Class 2

Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-34009-WHT	White	Tauri LED Light	18W LED	1800	0.58kg	H:15mm Dia:217mm
SPA-34011-SNIC	Satin Nickel	Tauri Magnetic Ring (Fits 18W model)	-	-	0.21kg	H:15mm Dia:217mm
SPA-34013-CHR	Chrome					
SPA-35717	Satin Black					
SPA-35718	Satin Brass					



2400
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

TAURI

24W LED Wall/Ceiling 5 in 1 Light



Code	Finish	Description	Lamp	Lumen	Weight	Dimensions
SPA-35710	White	Tauri LED Light	24W LED	2400	0.66kg	H:15mm Dia:290mm
SPA-35719	Satin Nickel	Tauri Magnetic Ring (Fits 24W model)	-	-	0.27kg	H:15mm Dia:290mm
SPA-35722	Chrome					
SPA-35720	Satin Black					
SPA-35721	Satin Brass					

**FAST
FIT**

IP65




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Fixed IP65 Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27467-WHT	White	IP65	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:125mm
ELA-27467-CHR	Chrome				
ELA-27467-BCHR	Black Chrome				
ELA-27467-SCHR	Satin Chrome				
ELA-27467-MBLK	Matt Black				
ELA-27467-SBRS	Satin Brass				

FAST
FIT



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Adjustable Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27466-WHT	White	IP20	1 x 7W max LED GU10	Ø85mm	Dia:93mm Proj:120mm H:135mm
ELA-27466-CHR	Chrome				
ELA-27466-BCHR	Black Chrome				
ELA-27466-SCHR	Satin Chrome				
ELA-27466-MBLK	Matt Black				
ELA-27466-SBRS	Satin Brass				

FAST
FIT



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

YATE

Fixed Fire Rated Downlight



Code	Finish	IP Rating	Lamp	Cutout	Dimensions
ELA-27465-WHT	White	IP20	1 x 7W max LED GU10	Ø72mm	Dia:80mm Proj:115mm H:135mm
ELA-27465-CHR	Chrome				
ELA-27465-BCHR	Black Chrome				
ELA-27465-SCHR	Satin Chrome				
ELA-27465-MBLK	Matt Black				
ELA-27465-SBRS	Satin Brass				

NEW

700
Lumens

IP65

FAST
FIT



- Dimmable
- Fire rated
- Fast fit terminals
- Available in 3 pack or single
- 7W LED module (COB)

- K: 4000
- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



EDEN

IP65 Tiltable Fire-rated Downlight



Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41111-WHT	White	7W	700	100	3 CCT	Dia:87mm H:30mm Cutout:70mm
SPA-41111-BLK	Black					
SPA-41111-CHR	Chrome					
SPA-41111-SBRS	Satin Brass					



- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K 3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



JENN

Anti-glare Fire-rated Downlight

Fire-rated

IP65
Rated

60°
Beam

70mm
Cut-out

CCT

Class 2

0.286kg

Code	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-41112-BLK/WHT	Black/White	8W	900	112.5	4 CCT	Dia:84mm H:65mm Cutout:70mm

**500
Lumens**

IP65

**FAST
FIT**



- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



COMO

IP65 Tiltable Fire-rated Downlight




Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38570/38571-ACOP	3 Pack/ Single	Antique Copper	5W	500	100	4000	Dia:87mm H:30mm Cutout:70mm
SPA-38570/38571-BCHR		Black Chrome					
SPA-38570/38571-CHR		Chrome					
SPA-38570/38571-MWHT		Matt White					
SPA-38570/38571-SBLK		Satin Black					
SPA-38570/38571-SBRS		Satin Brass					
SPA-38570/38571-SNIC		Satin nickel					



900
Lumens



FAST
FIT



- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000



RHOM

IP65 Fixed Fire-rated Downlight



Fire-rated



IP65
Rated



60°
Beam



70mm
Cut-out



CCT



Class 2



0.15kg

Code	Pack Size	Finish	Power (W)	Total Flux (lm)	Efficiency (lm/W)	Colour (k)	Dimensions
SPA-38572-ACOP	Single	Antique Copper	8W	900	112.5	CCT	Dia:87mm H:65mm Cutout:70mm
SPA-38572-BCHR		Black Chrome					
SPA-38572-CHR		Chrome					
SPA-38572-MWHT		Matt White					
SPA-38572-SBLK		Satin Black					
SPA-38572-SBRS		Satin Brass					
SPA-38572-SNIC		Satin nickel					

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



CALI

Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	Dia:92mm H:100mm Cutout:74mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



CALI

Square Tiltable Downlight



IP65
Rated



74mm
Cut-out



Class 2



0.17kg

Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP	Cali Square Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	L:82mm W:82mm H:100mm Cutout:74mm
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK		Matt Black		
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

IP44



- Chrome finish
- Pull switch

ARIES

2 Light Wall Light



Code	Description	Lamp	Dimensions
SPA-PR12744-CHR	Aries 2 Light Wall Light	2 x 3W max LED G9	Proj:115mm W:360mm H:60mm

IP44



- Chrome finish
- Pull switch

AQUARIUS


Wall Light



Code	Description	Lamp	Dimensions
SPA-PR17146-CHR	Aquarius Wall Light	1 x 3W max LED G9	Proj:180mm W:110mm H:220mm

395
Lumens

IP44

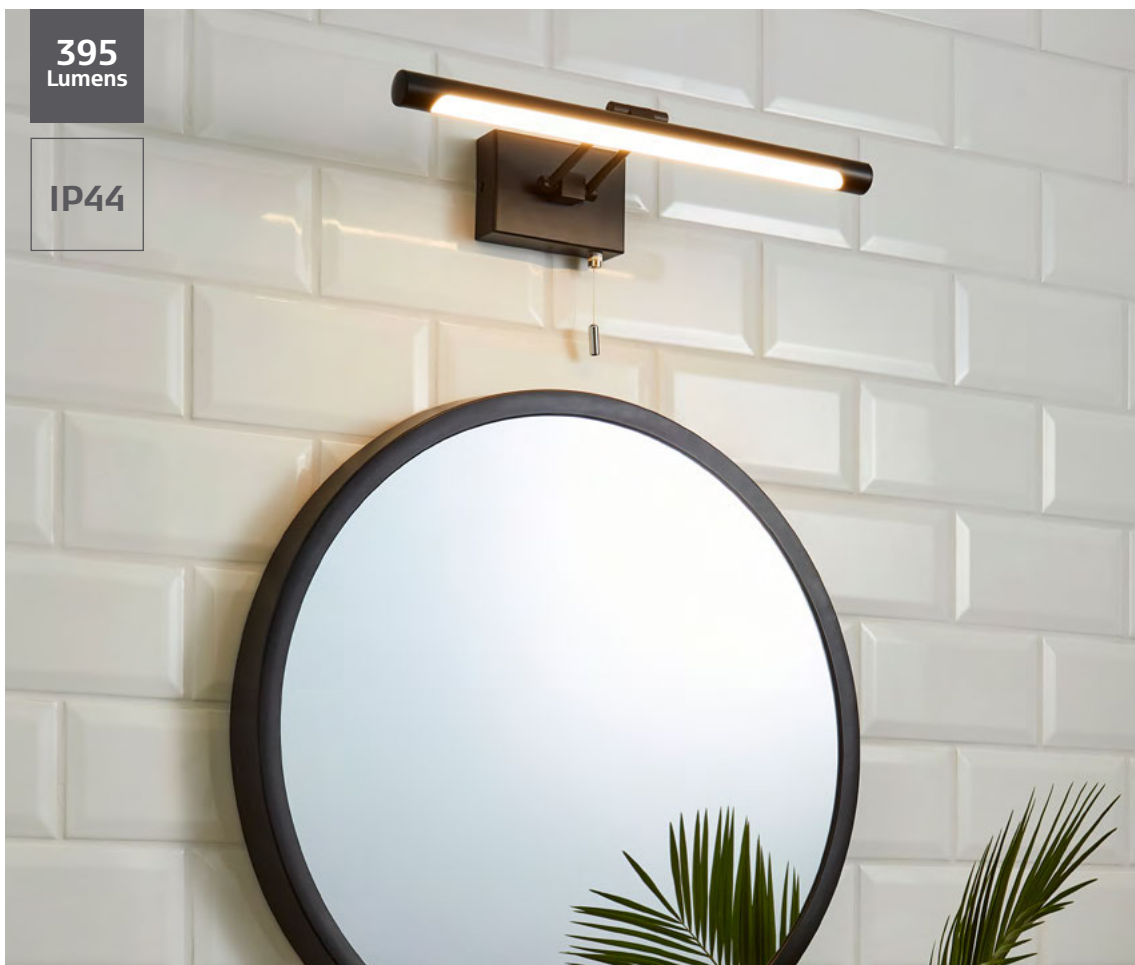

- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



CHAI

Picture/Mirror Light



IP44
Rated



3000K
WW



Class 1



0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:40mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						

IP44



- Available in chrome & satin brass
- Pull switch



CORVUS

Wall Light



Code	Finish	Description	Lamp	Dimensions
SPA-6888.014-CHR	Chrome	Corvus Wall Light	2 x 3W max LED G9	W:205mm H:105mm Proj:155mm
SPA-6888.014-SATBRS	Satin Brass			

IP44

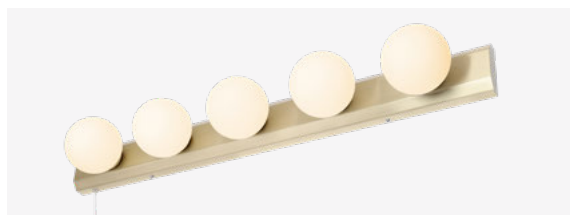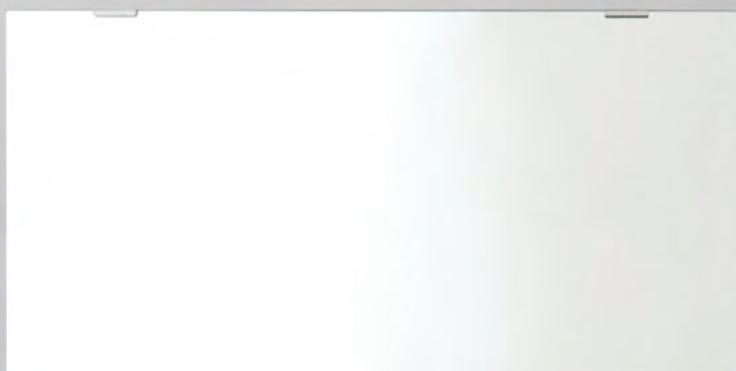

- Available in 3 finishes
- Pull switch

ARA

Hollywood 5 Light Bar Wall Light



IP44
Rated



Class 1



2kg


Code	Finish	Description	Lamp	Dimensions
SPA-PR13145-CHR	Chrome	Ara 5 Light Wall Light	5 x 3W max LED G9	W:680mm H:80mm Proj:110mm
SPA-PR13145-MBLK	Matt Black			
SPA-PR13145-SATBRS	Satin Brass			

356
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Integrated shaver socket
- Can be mounted landscape or portrait
- 12W LED module (SMD)
- K: 5000
- Lm: 356
- Lm/W: 29



ECTI

Illuminated Bathroom Mirror



Shaver
Socket



IP44
Rated



5000K
DW



Class 1



6.65kg

Code	Description	Lamp	Dimensions
SPA-34035	Ecti Illuminated Bathroom Mirror	12W LED	H:700mm W:500mm Proj:56mm

763
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 16W LED module (SMD)
- K: 5000
- Lm: 763
- Lm/W: 47



FLEC

Illuminated Bathroom Mirror



Demist
Pad



IP44
Rated



5000K
DW



Class 1



8.95kg


Code	Description	Lamp	Dimensions
SPA-34036	Flec Illuminated Bathroom Mirror	16W LED	H:800mm W:600mm Proj:33mm

504
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 18W LED module (SMD)
- K: 5000
- Lm: 504
- Lm/W: 18



REF

Illuminated Bathroom Mirror



Demist
Pad



IP44
Rated



5000K
DW



Class 1



6.3kg


Code	Description	Lamp	Dimensions
SPA-34037	Ref Illuminated Bathroom Mirror	18W LED	H:700mm W:500mm Proj:46mm

1337
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 22W LED module (SMD)
- K: 5000
- Lm: 1337
- Lm/W: 60



NOR

Illuminated Bathroom Mirror



Demist
Pad



IP44
Rated



5000K
DW



Class 1



6.7kg


Code	Description	Lamp	Dimensions
SPA-34038	Nor Illuminated Bathroom Mirror	22W LED	H:800mm W:600mm Proj:46mm

296
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Can be mounted landscape or portrait
- 8W LED module (SMD)
- K: 5000
- Lm: 296
- Lm/W: 60



ION

Illuminated Bathroom Mirror



IP44
Rated



5000K
DW



Class 1



3.7kg

Code	Description	Lamp	Dimensions
SPA-34039	Ion Illuminated Bathroom Mirror	8W LED	H:500mm W:400mm Proj:46mm





1690
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch sensor switch
- 12W LED module (SMD)
- K: 5000
- Lm: 1690
- Lm/W: 140

NYX

Illuminated Bathroom Mirror



Touch
Switch



IP44
Rated



5000K
DW



Class 1



KG
6.9kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35706	Nyx Illuminated Mirror	12W	5000k	1690	140	>80	Dia:600mm Proj:35mm





- Soft close hinged single door
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2190
- Lm/W: 64



ARTE

Illuminated Bathroom Mirror Cabinet



Shaver
Socket



Demist
Pad



Touch
Switch



IP44
Rated



5000K
DW



Class 1



6.9kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35707	Arte Illuminated Single Door Mirrored Cabinet	34W	5000k	2190	64	>80	W:500mm H:700mm Proj:130mm





- Soft close hinged double doors
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2500
- Lm/W: 73.5



HYM

Illuminated Bathroom Mirror Cabinet



Shaver
Socket



Demist
Pad



Touch
Switch



IP44
Rated



5000K
DW



Class 1



6.9kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	CRI	Dimensions
SPA-35708	Hym Illuminated 2 Door Mirrored Cabinet	34W	5000k	2500	73.5	>80	W:600mm H:800mm Proj:130mm



IPX4

- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Automatic opening and closing seat cover
- Integral LED night light
- Ceramic toilet bowl

WALL MOUNT

Smart Toilet



Code	Description	Finish	Material	Dimensions
SPA-37153	Wall Mount Smart Toilet	White	Ceramic	L:598mm x W:380mm x H:332mm

IP67



- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorisation with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation



- Includes fused spur and fixing kit

MITO

Electric Bidet Toilet Seat



Code	Description	Finish	Material	Dimensions
SPA-34865	Electric Bidet Toilet Seat	White	Plastic	H:180mm W:435mm L:485mm



Spa^{PRO}

PREMIUM

Spa PRO beautifully designed, premium glass decorative lighting that will bring a touch of glamour to any home.

COLLECTIONS

298-307

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Small 3 Light Flush



Code	Description	Lamp	Dimensions
SP-25204-CHR	Bresna 3 Light Flush	3 x 3W max LED G9	H:350mm Dia:350mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Small 3 Light Flush

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-31450-CHR	Bresna Small 3 Light Flush	3 x 3W max LED G9	H:350mm Dia:280mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

6 Light Pendant

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25202-CHR	Bresna 6 Light Pendant	6 x 3W max LED G9	H:1200mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

BRESNA

Wall Light



Code	Description	Lamp	Dimensions
SP-25203-CHR	Bresna Wall Light	2 x 3W max LED G9	Proj:175mm W:300mm H:200mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

3 Light Chandelier



Code	Description	Lamp	Dimensions
SP-31449-CHR	Annalee 3 Light Chandelier	3 x 3W max LED G9	H:1520mm Dia:450mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

Small 5 Light Chandelier



Code	Description	Lamp	Dimensions
SP-25256-CHR	Annalee 5 Light Chandelier	5 x 3W max LED G9	H:1000mm Dia:385mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

5 Light Chandelier



Code	Description	Lamp	Dimensions
SP-25254-CHR	Annalee 5 Light Chandelier	5 x 3W max LED G9	H:1580mm Dia:500mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

8 Light Chandelier



Code	Description	Lamp	Dimensions
SP-25255-CHR	Annalee 8 Light Chandelier	8 x 3W max LED G9	H:1650mm Dia:400mm

IP44



- Chrome finish
- Clear crystal shades

ANNALEE

Wall Light



Code	Description	Lamp	Dimensions
SP-25253-CHR	Annalee Wall Light	2 x 3W max LED G9	Proj:156mm W:297mm H:420mm

IP44



- Chrome finish
- Clear crystal shades

NORE

Small Encased Flush

IP44
Rated

Class 1

Code	Description	Lamp	Dimensions
SP-25211-CHR	Nore Small Encased Flush	5 x 3W max LED G9	H:300mm Dia:400mm



KITCHEN

A range of modern LED kitchen lighting, including tape, under cabinet lights, link lights and plinth lights.


UNDER CABINET	310-317
KINETIC SWITCHES	318-321
KONECT PLUG & PLAY	322-330
SOCKETS/QI CHARGING	331
TRACK LIGHTING	332-336
PLINTH LIGHTING	337
LED BATTENS	338-339



- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100



FORTE LED Under Cabinet Light




Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25319	Fonte Under Cabinet Light	1.5W LED	3000	130	H:126mm W:145mm Proj:32mm
CUL-21626	Fonte Under Cabinet Light	1.5W LED	4000	140	H:126mm W:145mm Proj:32mm
CUL-25219	Fonte Under Cabinet Light	1.5W LED	6000	150	H:126mm W:145mm Proj:32mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K
- 1.5W LED module (SMD)
- Lm/W: 100



POZZA

Recessed LED Under Cabinet Light




Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25317	Pozza Under Cabinet Light	1.5W LED	3000	130	Dia:65mm Proj:20mm
CUL-21624	Pozza Under Cabinet Light	1.5W LED	4000	140	Dia:65mm Proj:20mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



LAGHETTO

LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25318	Laghetto Under Cabinet Light	1.5W LED	3000	130	Dia:75mm Proj:26mm
CUL-21625	Laghetto Under Cabinet Light	1.5W LED	4000	140	Dia:75mm Proj:26mm
CUL-25218	Laghetto Under Cabinet Light	1.5W LED	6000	150	Dia:75mm Proj:26mm

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



LAGO

LED Under Cabinet Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-25320	Lago Under Cabinet Light	1.5W LED	3000	130	H:142mm W:80mm Proj:32mm
CUL-21627	Lago Under Cabinet Light	1.5W LED	4000	140	H:142mm W:80mm Proj:32mm
CUL-25220	Lago Under Cabinet Light	1.5W LED	6000	150	H:142mm W:80mm Proj:32mm



- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



ARGI

LED Round Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35864	Argi Round LED CCT Under Cabinet Light	3W LED	180	Dia:75mm H:29mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



ELLEN

LED Round Under Cabinet Light




Code	Description	Lamp	Lumen	Dimensions
CUL-35860	Ellen Round LED CCT Under Cabinet Light	1.5W LED	120	Dia:75mm Proj:29mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



FARO

LED Triangle Under Cabinet Light



Code	Description	Lamp	Lumen	Dimensions
CUL-35861	Faro Triangle LED CCT Under Cabinet Light	1.5W LED	120	H:122mm W:142mm Proj:36mm

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



AYLA

LED Triangle Under Cabinet Light




Code	Description	Lamp	Lumen	Dimensions
CUL-35865	Ayla Triangle LED CCT Under Cabinet Light	3W LED	180	H:122mm W:142mm Proj:36mm



LEGARE

LINK LEAD

2
SIZES
AVAILABLE

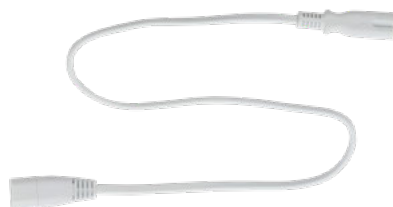

- Enables you to connect 2 legare or bude link lights on the same circuit
- Available in 2 lengths
- IEC C8 cable

Code	Length
CUL-21665	0.5 meters
CUL-21666	1 meter

Upto
**1200
Lumens**

**NO
DRIVER
REQ.**

- SMD LED
- Silver aluminium body with opal polycarbonate diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system

Simple to butt connect fittings together

LEGARE

Under Cabinet Link Light



Code	Description	Power (w)	Kelvin	Lumen	Weight	Length	Dimensions
CUL-25321	Legare Under Cabinet Link Light	4W LED	3000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-25323		12W LED	3000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-25324		14W LED	3000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm
CUL-21661		4W LED	4000	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-21662		7W LED	4000	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-21663		12W LED	4000	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-21664		14W LED	4000	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm



Upto
1200
Lumens



**NO
DRIVER
REQ.**

- Silver aluminium body with opal polycarbonate diffuser
- Switch between 3000K/OFF/4000K
- No driver required
- Supplied with 2m power lead
- Simple connection system



- Simple to butt connect fittings together

LEGARE

CCT Under Cabinet Link Light



Code	Description	Lamp	Lumen	Weight	Length	Dimensions
CUL-34223-CCT	Legare CCT Link Light	4W LED	400	0.21kg	300mm	L:300mm W:24mm Proj:34mm
CUL-34224-CCT	Legare CCT Link Light	7W LED	700	0.3kg	500mm	L:500mm W:24mm Proj:34mm
CUL-34225-CCT	Legare CCT Link Light	12W LED	1000	0.4kg	870mm	L:870mm W:24mm Proj:34mm
CUL-34226-CCT	Legare CCT Link Light	14W LED	1200	0.59kg	1200mm	L:1200mm W:24mm Proj:34mm



**Upto
350
Lumens**

- Ideal for multiple applications
- No wiring required
- PIR sensor with 3M detection distance
- AUTO ON/ALWAYS ON/OFF function
- 4 hours charge time



LIGERO

Rechargeable Under Cabinet Light



Recharge-
able



4000K




PIR
Sensor

Code	Power (w)	Colour (k)	Total Flux (lm)	Battery	Charge Time	Run Time	Dimensions
CUL-37386	1W	4000k	90	750mAh Li-ion	4 Hours	4 Hours	L:200mm W:40mm H:9mm
CUL-37387	2W	4000k	160	1100mAh Li-ion	4 Hours	5 Hours	L:400mm W:40mm H:9mm
CUL-37388	3W	4000k	230	1500mAh Li-ion	4 Hours	5 Hours	L:564mm W:40mm H:9mm
CUL-37389	4W	4000k	350	2200mAh Li-ion	4 Hours	5 Hours	L:864mm W:40mm H:9mm



PLUG & PLAY SYSTEM

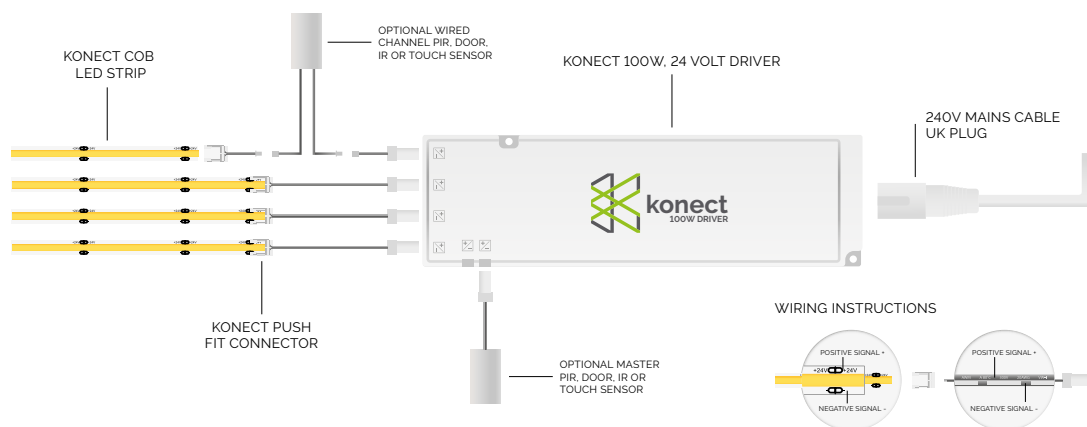

The Konec plug and play system features revolutionary wiresafe technology. Designed to protect all ports from overloading, short circuits and electrical surges, ensuring lighting systems stay as safe as possible. In turn conforming to BS7671 Regulations.

The new Konec connectors on each components are designed to only fit into the respective ports further enhancing safety. Offering this balance of maximum safety and simplicity means less need for electrical qualifications on installation, saving you time and money on your next lighting project.

We have a range of drivers with a range of up to 7 connection ports and can power up to 100 watts worth of LED Lights in one 24 Volt lighting system. Full customisable with UK plugs available in 3 lengths, extension cables and a range of lighting you will be sure to find something suitable for your needs.

KINETIC WIRELESS SWITCHING



KINETIC SYSTEM OVERVIEW



Push switch
to create kinetic
energy



Internal module
collects kinetic
energy



Kinetic energy
is converted
into electricity



Communication
module
transmits signal



Receiver controls
light and switches
on/off

The wireless switch uses micro-energy acquisition technology. Kinetic energy is generated to create and transmit a radio signal to the receiver which in turn, will switch lamps or other loads on or off.

There is no longer the constraint of wiring location and no need to install back boxes or cut holes into walls. The kinetic switch can be installed anywhere or placed to maximise convenience.

Lighting can be controlled manually by using the switch, smart phone or tablet using the Smart Life App or connecting it to a voice controlled device such as Amazon Alexa or Google Home.

The kinetic switches require no wiring or batteries which eliminates the need for installing back boxes, creating channels in walls and adjusting decor, thus speeding up the installation process and reducing labour time & costs.

The switch can be installed anywhere in the home, including the bathroom due to its IP67 rating. The switches can be screwed to the surface, or stuck on with the adhesive pads supplied. They can also be retro-fit onto existing back boxes as they are the same size as standard switches.



1 GANG SWITCH

- IP42 rated
- For use with 40038, 40039 & 40040 (dimmmable by app only with 40040)
- 12-150m Range

NEW

Code	Description	Finish
CUL-40031	1 gang self powered wall switch	White
CUL-40032	1 gang self powered wall switch	Black



2 GANG SWITCH

- IP42 rated
- For use with 40038, 40039 & 40040 (dimmmable only with 40040)
- 12-150m Range

NEW

Code	Description	Finish
CUL-40033	2 gang self powered wall switch	White
CUL-40034	2 gang self powered wall switch	Black




3 GANG SWITCH

- IP42 rated
- For use with 40038, 40039 & 40040 (dimmmable only with 40040)
- 12-150m Range

NEW

Code	Description	Finish
CUL-40035	3 gang self powered wall switch	White
CUL-40036	3 gang self powered wall switch	Black



1 GANG FOB SWITCH

NEW

- IP65 rated
- 8-40m range
- No battery or wiring required
- Silicone finish

Code	Description	Finish
CUL-40037	1 gang fob switch	Grey



NON-DIMMABLE RF RECEIVER

NEW

- IP20 rated
- 8-40m range

Code	Description	Finish
CUL-40038	Non-dimmable RF receiver	White



NON-DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Code	Description	Finish
CUL-40039	Non-dimmable Wi-Fi receiver	White



DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Code	Description	Finish
CUL-40040	Dimmable Wi-Fi receiver	White

350
Lumens



- Brushed steel finish
- 5W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

SLIMLINE

Under Cabinet Spotlight

120°
Beam

2M
Cable

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37797	Brushed Steel	Slimline Under Cabinet Spotlight	5W	3000k	350	L:190mm x W:70mm Proj:4mm
CUL-37798	Brushed Steel			4000k		



150
Lumens



- Brushed steel finish
- Designed for surface mounting or recessed
- 1.8W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



RECESSED/SURFACE

Under Cabinet Spotlight



60mm
Cut-out



120°
Beam



2M
Cable

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37795	Brushed Steel	Recessed/Surface Under Cabinet Spotlight	1.8W	3000k	150	Dia:65mm H:10mm
CUL-37796	Brushed Steel			4000k		



Upto
460
Lumens



- Infrared sensor ideal for kitchen drawers and wardrobes
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



IR MINI

Under Cabinet/Drawer Light




Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37787	Brushed Steel	IR Mini Under Cabinet/Drawer Light	3.5W	3000k	220	L:563mm x W:13mm Proj:15.5mm
CUL-37788	Brushed Steel			4000k		
CUL-37789	Brushed Steel		5.2W	3000k	460	L:863mm x W:13mm Proj:15.5mm
CUL-37790	Brushed Steel			4000k		



Upto
934
Lumens



- Flexible 12W/m LED COB tape
- CRI: >90
- Can be cut every 60mm
- 5m roll
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Requires power cord
- Easy to install



8MM LED COB

Flexible Strip



Code	Description	Power (w)	Colour (k)	CRI	Total Flux (lm)	Length
ELA-35750	8mm LED COB Flexible Strip	12W/m	3000k	>90	150	5m
ELA-37551			4000k	>90		

100
Lumens



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



ROUND Plinth Light



32mm
Cut-out



100°
Beam



2M
Cable


Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37791	Matt Silver	Round Plinth Light	1.2W	3000k	100	Dia:35mm H:13.5mm
CUL-37792	Matt Silver			4000k		



100
Lumens




- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konekt drivers
- Easy to install



SQUARE

Plinth Light



Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
CUL-37793	Matt Silver	Square Plinth Light	1.2W	3000k	100	L:35mm W:35mm H:13.5mm
CUL-37794	Matt Silver			4000k		



60W/24V DRIVER/CONVERTER



- Plug & Play with Konec sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37770	AC200-240V	24V	60W	7 ports	L:189mm W:55mm H:15mm



100W/24V DRIVER/CONVERTER



- Plug & Play with Konec sensors, dimmers and lighting
- Driver applies to BS7671 regulations

Code	Input	Output	Load	Output Sockets	Dimensions
CUL-37771	AC200-240V	24V	100W	7 ports	L:239mm W:56mm H:18mm




MICRO DISTRIBUTOR



- Connect up to 6 accessories using 1 port from your driver

Code	Connector	Cable Length	Output Sockets	Dimensions
CUL-37786	Micro24	140mm	6 ports	L:60mm W:45mm H:45mm



POWER CONNECTOR

Code	Description
CUL-37801	8mm COB dupont to strip soldering free connector



STRIP TO STRIP WIRE CONNECTOR

Code	Description
CUL-37802	8mm COB strip to wire to strip soldering free connector




STRIP TO STRIP CONNECTOR

Code	Description
CUL-37803	8mm COB strip to strip soldering free connector



UK PLUG TO 'FIGURE-8' (C7) TYPE MAINS LEAD

Code	Input	Cable Length	Colour
CUL-37783	AC200-240V	1000mm	White
CUL-37784	AC200-240V	1500mm	White
CUL-37785	AC200-240V	1800mm	White



EXTENSION CABLE

Code	Connector	Cable Length	Colour
CUL-37772	Micro 24 male/female connector	1200mm	White
CUL-37773	Micro 24 male/female connector	1800mm	White
CUL-37774	Micro 24 male/female connector	2400mm	White



IR DOOR SENSOR

The infrared door sensor automatically senses when the cupboard door is opened and switches the light on, and when the cupboard door is shut the lights are instantly switched off, saving energy and money.

Code	Control Mode	Max Load	Cable Length
CUL-37775	Master	–	1500mm
CUL-37776	Channel	60W	2 x 1500mm



HAND MOTION SENSOR

Simply swipe your hand below the sensor within a 8cm distance enabling you to switch on and off any lighting without touching any buttons.

Code	Control Mode	Max Load	Cable Length
CUL-37781	Master	–	1500mm
CUL-37782	Channel	60W	2 x 1500mm



PIR SENSOR

Turns on the lighting when movement is detected within a 3m distance. The sensor has a 35 second timing delay so once no further movement is detected the lighting will power off. This can be recessed or mounted flush with the extra bracket provided.



Code	Control Mode	Max Load	Cable Length
CUL-37777	Master	–	1500mm
CUL-37778	Channel	60W	2 x 1500mm



TOUCH SENSOR

The touch sensor features a blue backlit light has a slimline design and is great for a recessed application. Short touch for on/off function or long press for dimming.



Code	Control Mode	Max Load	Cable Length
CUL-37779	Master	–	1500mm
CUL-37780	Channel	60W	2 x 1500mm



IP54



- 2W Bluetooth speaker
- 2 x USB charging ports
- 2 x power outlets
- Qi charger
- IP54 rated
- NOTE: finish is grey not black, images for illustration purposes only

POP UP

Socket with Bluetooth Speaker



97mm
Cut-out



Bluetooth
Speaker



IP54
Rated

Code	Finish	Description	USB Ports	Speaker	Dimensions
CUL-37800	Grey	Pop Up Socket with Bluetooth Speaker	2 x 4.5W	1 x 2W	H:260mm (extended) Dia:99.5mm

NEW
FOR
2023



- Ceiling cup to track insert supplied with 0.5m cable and 1m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads
330° rotation and 90° tilt
- Matching compatible track in the range

CAYO

3 Head Track Light Kit



Class 1



1.2kg

Code	Description	Colour	Lamp	Dimensions
INL-41730-BLK	Cayo 3 Head Track Light Kit	White	3 x 7W max LED GU10	L:1000mm Proj:180mm
INL-41730-WHT	Cayo 3 Head Track Light Kit	Black	3 x 7W max LED GU10	L:1000mm Proj:180mm

NEW
FOR
2023



- Ceiling cup to track insert supplied with 0.5m cable and 2 x 0.8m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads
330° rotation and 90° tilt
- Matching compatible track in the range



CAYO

5 Head Track Light Kit




Class 1



2.07kg

Code	Description	Colour	Lamp	Dimensions
INL-41731-BLK	Cayo 5 Head Track Light Kit	White	5 x 7W max LED GU10	2 x L:800mm Proj:180mm
INL-41731-WHT	Cayo 5 Head Track Light Kit	Black	5 x 7W max LED GU10	2 x L:800mm Proj:180mm

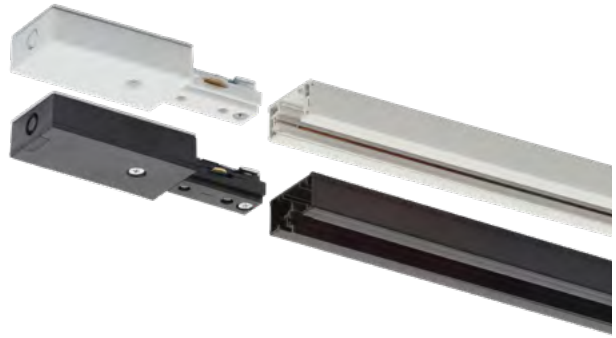

- 220-240V
- Die-cast Aluminium and ABS construction
- Includes 1 x live end & 1 x dead end

TOR

Single Circuit Track



Code	Description	Colour	Length	Dimensions
CUL-21637-WHT	Tor Single Circuit Track	White	1000mm	L:1000mm W:37mm Proj:17mm
CUL-21638-WHT	Tor Single Circuit Track	White	1500mm	L:1500mm W:37mm Proj:17mm
CUL-21639-WHT	Tor Single Circuit Track	White	2000mm	L:2000mm W:37mm Proj:17mm
CUL-26333-BLK	Tor Single Circuit Track	Black	1000mm	L:1000mm W:37mm Proj:17mm
CUL-26334-BLK	Tor Single Circuit Track	Black	1500mm	L:1500mm W:37mm Proj:17mm
CUL-26335-BLK	Tor Single Circuit Track	Black	2000mm	L:2000mm W:37mm Proj:17mm



- For use with Tor Single Circuit Track
- Steel and ABS construction

LUSTRO

Track Light



Code	Description	Colour	Lamp	Dimensions
CUL-21660-WHT	Lustro Track Light	White	1 x 7W max LED GU10	H:103mm Proj:89mm
CUL-26346-BLK	Lustro Track Light	Black	1 x 7W max LED GU10	H:103mm Proj:89mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

LUCIDO

Track Light



Class 1



0.13kg

Code	Description	Colour	Lamp	Dimensions
CUL-21658-WHT	Lucido Track Light	White	1 x 7W max LED GU10	H:135mm Proj:75mm
CUL-26345-BLK	Lucido Track Light	Black	1 x 7W max LED GU10	H:135mm Proj:75mm



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

RIBALTA

Track Light



Class 1



0.29kg

Code	Description	Colour	Lamp	Dimensions
CUL-21656-WHT	Ribalta Track Light	White	1 x 7W max LED GU10	H:200mm Proj:78mm
CUL-26344-BLK	Ribalta Track Light	Black	1 x 7W max LED GU10	H:200mm Proj:78mm

TRACK ACCESSORIES



White	Black	Description	Dimensions
CUL-26342	CUL-26341	Flexible Connector	L:296mm W:35mm Proj:17mm
CUL-21645	CUL-26337	Double Live End Connector	L:184mm W:35mm Proj:17mm
CUL-33996	CUL-33996	Track Pendant Adapter	L:81mm W:34mm Proj:46mm
CUL-21651	CUL-26339	T Live End Connector	L:109mm W:183mm Proj:17mm
CUL-21649	CUL-26340	X Live End Connector	L:183mm W:183mm Proj:17mm
CUL-21647	CUL-26338	L Live End Connector	L:109mm W:109mm Proj:17mm
CUL-21643	CUL-26336	Butt Connector	L:79mm W:35mm Proj:17mm
CUL-21653	CUL-26332	Track Pendant Adapter	L:39mm W:36mm Proj:46mm




20
Lumens

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 0.5W LED module (SMD)



OHIO

Circular Plinth Light



Code	Description	Lamp	Kelvin	Lumen	Dimensions
CUL-26465-WW	Ohio Circular 240V Decking Light	0.5W LED	3000	20	Dia:40mm
CUL-26465	Ohio Circular 240V Decking Light	0.5W LED	6000	20	Dia:40mm




**Upto
6000
Lumens**

**NO
DRIVER
REQ.**



• 7mm clip

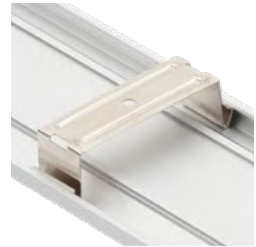

• 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

RENO

LED Batten



Class 2

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Length	Dimensions
CUL-30698	Reno LED Batten	20W LED	3000	1800	600mm	L:600mm W:75mm Proj:24mm
CUL-30700		30W LED	3000	2690	900mm	L:900mm W:75mm Proj:24mm
CUL-30702		40W LED	3000	3600	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30699		20W LED	4000	1850	600mm	L:600mm W:75mm Proj:24mm
CUL-30701		30W LED	4000	2730	900mm	L:900mm W:75mm Proj:24mm
CUL-30703		40W LED	4000	3650	1200mm	L:1200mm W:75mm Proj:24mm
CUL-30704		60W LED	3000	5200	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30707		80W LED	3000	6600	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30705		60W LED	4000	5300	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30708		80W LED	4000	6700	1800mm	L:1800mm W:75mm Proj:24mm
CUL-30706		60W LED	6000	5500	1500mm	L:1500mm W:75mm Proj:24mm
CUL-30709		80W LED	6000	6900	1800mm	L:1800mm W:75mm Proj:24mm

RENO

Suspension Kit



Code	Description	Dimensions
CUL-30710	Reno 1m Suspension Kit	L:1000mm
CUL-30711	Reno 2m Suspension Kit	L:2000mm



INDOOR

Indoor lighting including a comprehensive range of decorative cable sets, shades and our new Illuminate task lighting. LED Lamps with attractive design and energy saving performance, INLIGHT LED lamps superbly compliment the Forum Lighting range.

PLASTER LIGHTS	342-347
SPOTLIGHTS	348-353
RECESSED	354-357
PICTURE LIGHT	359
TASK LIGHTING	360-361
CABLE SETS	362-369
SHADES	371-373
LED LAMPS	374-385

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

UBEDA

Downlight



Class 2



0.4kg

Code	Lamp	Dimensions
INL-37213-WHT	1 x 7W max LED GU10	Dia:70mm H:110mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

CADIZ

Tiltable Downlight



Class 1



1.75kg

Code	Lamp	Dimensions
INL-37214-WHT	1 x 7W max LED GU10	Dia:135mm H:160mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

CABRA

Flush Downlight



Class 1



0.4kg

Code	Lamp	Dimensions
INL-37211-WHT	1 x 7W max LED GU10	Dia:130mm H:50mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

CARMONA

Up/Down Wall Light



Class 1



0.95kg

Code	Description	Finish	Lamp	Dimensions
INL-37225-WHT	Carmona Up/Down Wall Light	White	2 x 7W max LED GU10	H:250mm W:70mm Proj:95mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

GETXO

Up/Down Wall Light




Class 1



1.70kg

Code	Description	Finish	Lamp	Dimensions
INL-37226-WHT	Getxo Up/Down Wall Light	White	2 x 6W max LED E14 Candle	H:70mm W:350mm Proj:105mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor


MONTILLA

Up/Down Light



Code	Lamp	Dimensions
INL-37219-WHT	1 x 3W max LED G9	H:115mm W:115mm Proj:115mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor


OSUNA

Up/Down Light



Code	Lamp	Dimensions
INL-37224-WHT	1 x 3W max LED G9	H:120mm W:110mm Proj:105mm

PAINT
TO MATCH
DECOR




- White plaster finish
- Can be painted to match decor

MARTOS

Up/Down Light



Code	Lamp	Dimensions
INL-37221-WHT	1 x 3W max LED G9	H:160mm W:100mm Proj:60mm

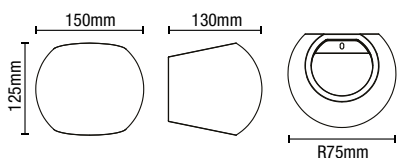

- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



MARTOS

Round Up/Down Light




Class 1



0.95kg

Code	Lamp	Dimensions
INL-37222-WHT	1 x 3W max LED G9	H:1205mm W:150mm Proj:130mm



- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



BAZA

Up/Down Light




Class 1



1.2kg

Code	Lamp	Dimensions
INL-37220-WHT	1 x 6W max LED E14 Candle	H:75mm W:300mm Proj:100mm



- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



RHONDA

Up/Down Light



Class 1



1.05kg

Code	Lamp	Dimensions
INL-37223-WHT	1 x 6W max LED E14 Candle	H:95mm W:245mm Proj:122.5mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor

TELDE

Wall Uplighter



Class 1




1.85kg

Code	Lamp	Dimensions
INL-38609-WHT	1 x 10W max LED E27 GLS	H:105mm W:425mm Proj:212mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor



MAO

Wall Uplighter



Class 1



1.2kg

Code	Lamp	Dimensions
INL-38610-WHT	1 x 10W max LED E27 GLS	H:125mm W:250mm Proj:127mm

PAINT
TO MATCH
DECOR



- White plaster finish
- Can be painted to match decor



ARUCAS

Wall Uplighter




Class 1



2.1kg

Code	Lamp	Dimensions
INL-38611-WHT	1 x 6W max LED E14 Candle	H:170mm W:353mm Proj:158mm



- White plaster finish
- Integral LED option

PAINT
TO MATCH
DECOR



TOLEDO

Wall Uplighter




Class 1



1.2kg

Code	Lamp	Dimensions
INL-38612-WHT	2 x 7W max LED GU10	H:245mm W:137mm Proj:78mm
INL-38613-WHT	2 x 3W integral LED	H:245mm W:137mm Proj:78mm



- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR




MOTRIL

Plaster Ceiling Mount



Class 1

Code	Lamp	Dimensions
INL-37215-WHT	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37216-WHT		H:85mm Dia:500mm



- White plaster finish
- Can be painted to match decor

PAINT
TO MATCH
DECOR



LUCENA

Plaster Ceiling Mount



Class 1

Code	Lamp	Dimensions
INL-37217-WHT	1 x 10W max LED E27 GLS	H:60mm Dia:300mm
INL-37218-WHT		H:80mm Dia:550mm



- Satin nickel and chrome finish
- Contemporary styling
- ON/OFF toggle switch

ELARA

Wall Spotlight



Code	Description	Lamp	Dimensions
INL-740000-SNIC	Elara Wall Spotlight	1 x 7W max LED GU10	L:110mm W:100mm H:115mm



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

ELARA

4 Light Bar Spotlight



Code	Description	Lamp	Dimensions
INL-598410-SNIC	Elara 4 Light Bar Spotlight	4 x 7W max LED GU10	L:800mm W:165mm H:145mm



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

ELARA

3 Light Plate Spotlight



Code	Description	Lamp	Dimensions
INL-598310-SNIC	Elara 3 Light Plate Spotlight	3 x 7W max LED GU10	H:115mm Dia:290mm



3
SIZES
AVAILABLE

- Black Chrome finish
- Contemporary styling
- Adjustable lamps



PEDRO

Spotlight



Code	Description	Lamp	Weight	Dimensions
INL-28201-BCHR	Pedro Wall/Ceiling Spotlight	1 x 7W max LED GU10	0.5kg	H:120mm Dia:100mm
INL-28202-BCHR	Pedro 2 Light Plate Spotlight	2 x 7W max LED GU10	1.1kg	H:120mm Dia:190mm
INL-28203-BCHR	Pedro 3 Light Plate Spotlight	3 x 7W max LED GU10	1.2kg	H:120mm Dia:260mm



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

PEDRO

4 Light Plate Spotlight



Class 1



1.65kg

Code	Description	Lamp	Dimensions
INL-28205-BCHR	Pedro 4 Light Plate Spotlight	4 x 7W max LED GU10	W:220mm L:220mm H:120mm



2
SIZES
AVAILABLE

- Black Chrome finish
- Contemporary styling
- Adjustable lamps

PEDRO

Bar Spotlight



Class 1

Code	Description	Lamp	Weight	Dimensions
INL-28204-BCHR	Pedro 4 Light Bar Spotlight	4 x 7W max LED GU10	1.9kg	L:100mm W:640mm H:120mm
INL-31790-BCHR	Pedro 6 Light Bar Spotlight	6 x 7W max LED GU10	2.92kg	L:100mm W:900mm H:120mm



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes



HARVEY

Spotlight



Class 1



0.19kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31775-SNIC	Satin Nickel	Harvey Spotlight	1 x 7W max LED GU10	L:100mm W:85mm H:120mm
INL-31775-BLK	Black			
INL-31775-WHT	White			
INL-31775-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

HARVEY

3 Light Plate Spotlight



Class 1



0.75kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31776-SNIC	Satin Nickel	Harvey 3 Light Spotlight	3 x 7W max LED GU10	Dia:215mm H:120mm
INL-31776-BLK	Black			
INL-31776-WHT	White			
INL-31776-SATBRS	Satin Brass			



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

HARVEY

4 Light Bar Spotlight



Class 1



0.75kg



Available in
4 colour options

Code	Finish	Description	Lamp	Dimensions
INL-31723-SNIC	Satin Nickel	Harvey 4 Light Bar Spotlight	4 x 7W max LED GU10	L:774mm W:85mm H:120mm
INL-31723-BLK	Black			
INL-31723-WHT	White			
INL-31723-SATBRS	Satin Brass			

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



CALI

Tiltable Downlight



Code	Description	Finish	Lamp	Dimensions
SPA-30841-BRCOP	Cali Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	Dia:92mm H:115mm Cutout:78mm
SPA-30841-MWHT		Matt White		
SPA-30841-MBLK		Matt Black		
SPA-30842-CHR		Chrome		
SPA-30842-SBRS		Satin Brass		
SPA-30842-SCHR		Satin Chrome		

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



CALI

Square Tiltable Downlight



IP65
Rated



78mm
Cut-out




Class 2



0.17kg

Code	Description	Finish	Lamp	Dimensions
SPA-38577-BRCOP	Cali Square Tiltable Downlight	Brushed Copper	1 x 7W max LED GU10	L:82mm W:82mm H:115mm Cutout:78mm
SPA-35724-MWHT		Matt White		
SPA-35725-MBLK		Matt Black		
SPA-35727-CHR		Chrome		
SPA-35723-SBRS		Satin Brass		
SPA-35726-SCHR		Satin Chrome		

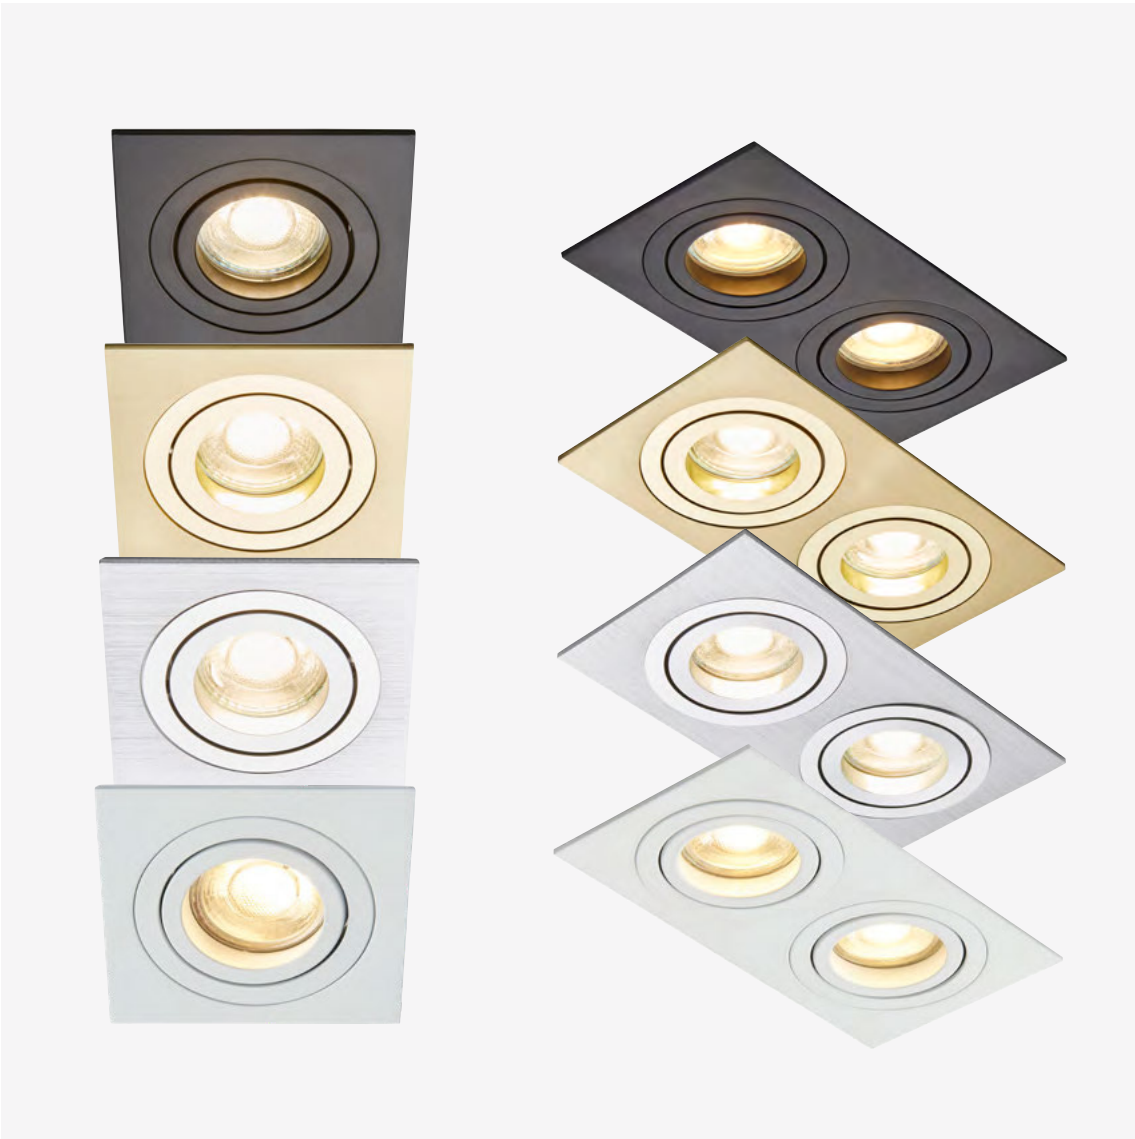

PASTO

Adjustable Downlight




Class 2

Code	Description	Finish	Lamp	Dimensions
INL-38617-BLK	Pasto Single Adjustable Downlight	Black	1 x 7W max LED GU10	L:92mm W:92mm H:3mm Cutout:80mm
INL-38617-POLBRS		Polished Brass		
INL-38617-POLSIL		Polished Silver		
INL-38617-WHT		White		
INL-38618-BLK	Pasto Double Adjustable Downlight	Black	2 x 7W max LED GU10	L:174mm W:92mm H:3mm Cutout:160 x 80mm
INL-38618-POLBRS		Polished Brass		
INL-38618-POLSIL		Polished Silver		
INL-38618-WHT		White		



PASTO

Triple Adjustable Downlight



Code	Description	Finish	Lamp	Dimensions
INL-38619-BLK	Pasto Triple Adjustable Downlight	Black	3 x 7W max LED GU10	L:257mm W:92mm H:3mm Cutout:245 x 80mm
INL-38619-POLBRS		Polished Brass		
INL-38619-POLSIL		Polished Silver		
INL-38619-WHT		White		



395
Lumens

IP44



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70



CHAI

Picture/Mirror Light



IP44
Rated



3000K
WW



Class 1



0.5kg

Code	Finish	Description	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Dimensions
SPA-30993-CHR	Chrome	Chai Bathroom Picture/Mirror LED Light	8W	3000k	395	70	H:80mm W:410mm Proj:160mm
SPA-30993-SNIC	Satin Nickel						
SPA-30993-SATBRS	Satin Brass						
SPA-30993-MBLK	Matt Black						



610
Lumens

3x



- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 8W LED module (SMD)
- K: 6000
- Lm: 610
- Lm/W: 76



• Task lamp simply slots into stand

BUDA

LED Task Lamp



1.5M
Cable



6000K
DW



Class 2



2.46kg

Code	Description	Lamp	Finish	Dimensions
INL-34557-WHT	Buda LED Task Lamp	8W LED	Matt White	L:400mm W:210mm H:1000mm



1100
Lumens

3x

- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 22W T4 Fluorescent lamp - included
- Lm: 1100

BUDA
Task Lamp



1.5M
Cable



Class 2



2.46kg

Code	Description	Lamp	Finish	Dimensions
INL-34556-WHT	Buda Task Lamp	22W T4 Fluorescent	Matt White	L:415mm W:200mm H:1000mm

RIMINI

E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 3 finishes
- Max cable height 1000mm including ceiling cup and lampholder

Code	Finish	Description	Lamp	Dimensions
INL-37894-BCOP	Brushed Copper	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-37894-PEW	Pewter			
INL-37894-BRZ	Bronze			

DALE

E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 4 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Finish	Lamp	Dimensions
INL-23519-BLK	Cable Set	Black Nickel with Black Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-GRY	Cable Set	Black Nickel with Grey Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-RED	Cable Set	Polished Nickel with Red Twisted cable	1 x 42W Max E27	Dia:118mm H:1100mm
INL-23519-HERR	Cable Set	Polished Nickel with Herringbone cable	1 x 42W Max E27	Dia:118mm H:1100mm



DALE

E27/ES CABLE SET



- Fits E27 lamps
- Can be fitted to almost any easyfit shade
- Adjustable height
- Available in 5 finishes
- Vintage styling
- Lamps supplied separately

Code	Description	Lamp	Dimensions
INL-27988-ABRS	Antique Brass Cable Set with Champagne Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-ACOP	Antique Copper Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-PEW	Pewter Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-BRZ	Bronze Cable Set with Black Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm
INL-27988-SNIC	Satin Nickel Cable Set with Grey Twisted Cable	1 x 42W Max E27	Dia:105mm H:1000mm



- Height adjustable

NAPOLI

Rope Cable Set



Class 1



0.4kg

Code	Finish	Description	Lamp	Dimensions
INL-37839	Pewter/Natural	Napoli Rope Cable Set	1 x 10W max LED E27 GLS	H:1050mm Dia:100mm



- Supplied with hook and loop fixing kit to create your own style
- Height adjustable

NAPOLI

Rope 6 Light Ceiling Light



Code	Finish	Description	Lamp	Dimensions
INL-37829	Pewter/Natural	Napoli Rope 6 Light Ceiling Light	6 x 10W max LED E27 GLS	H:1420mm Dia:2550mm (extd.)



SHADE
RING



- Supplied with hook and loop fixing kit to create your own style
- Can be fitted with most easyfit shades
- Height adjustable

PADUA

Ceiling Light



Class 1

Code	Finish	Description	Lamp	Dimensions	Weight
INL-37877-ACOP	Copper/Black	Padua 3 Light Ceiling Light	3 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	0.8kg
INL-37878-ACOP	Copper/Black	Padua 5 Light Ceiling Light	5 x 10W max LED E27 GLS	Min H:110mm Max H:1180mm	1.3kg
INL-31789-ACOP	Copper/Black	Padua 7 Light Ceiling Light	7 x 10W max LED E27 GLS	Min H:110mm Max H:2000mm	1.81kg



RIGEL

DINER SHADES

INL-33818-ACOP



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets



INL-33819-ABRS



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets



Description	Colour	Small	Dimensions	Large	Dimensions
Rigel Diner Shade	Antique Brass	INL-33818-ABRS	H:67mm Dia:236mm	INL-33819-ABRS	H:67mm Dia:360mm
Rigel Diner Shade	Matt Black	INL-33818-MBLK	H:67mm Dia:236mm	-	-
Rigel Diner Shade	Polished Nickel	INL-33818-PNIC	H:67mm Dia:236mm	INL-33819-PNIC	H:67mm Dia:360mm
Rigel Diner Shade	Antique Copper	INL-33818-ACOP	H:67mm Dia:236mm	INL-33819-ACOP	H:67mm Dia:360mm
Rigel Diner Shade	Matt Grey	INL-33818-MGRY	H:67mm Dia:236mm	INL-33819-MGRY	H:67mm Dia:360mm



DECORATIVE SHADES



INL-33136-SMK



INL-33140-ACOP

Key Features

- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

Code	Description	Colour	Dimensions
INL-33136-SMK	Algol Coolie Glass Easyfit Shade	Smoke	Dia:250mm H:125mm
INL-33140-ACOP	Castor Diamond Wire Easyfit Shade	Antique Copper	Dia:263mm H:210mm



- Fits E27 lamps
- Perfect replacement for standard ceiling rose pendants



CEILING ROSE

E27/ES

Code	Finish	Description	Lamp	Dimensions
INL-34942-SNIC	Satin Nickel	Ceiling Rose	1 x max 10W LED E27 GLS	Dia:180mm H:120mm
INL-34942-ABRS	Antique Brass			
INL-34942-ACOP	Antique Copper			



- Fits E27 lamps
- Can be fitted with most easyfit shades
- Space between ceiling and shade ring



SHADE
RING



PADUA LAMPHOLDER

E27/ES

Code	Finish	Description	Lamp	Dimensions
INL-38239-BRZ	Bronze	Lampholder Flush	1 x max 10W LED E27 GLS	Dia:105mm H:100mm
INL-38239-PEW	Pewter			
INL-38239-SNIC	Satin Nickel			



- 360° Beam angle
- Dimmable
- Available in amber or smoke




LARGE VINTAGE LAMPS


E27/ES




INL-34028-SMK




INL-34029-SMK



INL-34030-SMK



INL-34031-SMK



INL-34028-AMB



INL-34029-AMB



INL-34030-AMB



INL-34031-AMB



Code	Description	Kelvin	Lumen	Dimensions
INL-34028-AMB/SMK	G180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:230mm
INL-34029-AMB/SMK	A165 6W LED E27 Filament Lamp	2000/4000	450	Dia:165mm H:300mm
INL-34030-AMB/SMK	BT180 6W LED E27 Filament Lamp	2000/4000	450	Dia:180mm H:360mm
INL-34031-AMB/SMK	T80 6W LED E27 Filament Lamp	2000/4000	450	Dia:80mm H:330mm

VINTAGE LAMPS

E27/ES



580
LUMEN

DIMMABLE



650
LUMEN

DIMMABLE



400
LUMEN

DIMMABLE



450
LUMEN

DIMMABLE

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-ST64-LED-ES-TNT	ST64 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-BC-TNT	ST64 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:64mm H:140mm
INL-ST64-LED-ES-CLR	ST64 6W E27 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-ST64-LED-BC-CLR	ST64 6W B22 LED Filament Lamp	Clear	2000	650	Dia:64mm H:140mm
INL-G80-LED-ES-TNT	G80 4W E27 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-BC-TNT	G80 4W B22 LED Filament Lamp	Tinted	2000	400	Dia:80mm H:120mm
INL-G80-LED-ES-CLR	G80 4W E27 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm
INL-G80-LED-BC-CLR	G80 4W B22 LED Filament Lamp	Clear	2000	450	Dia:80mm H:120mm

VINTAGE LAMPS

E27/ES



580
LUMEN

DIMMABLE



650
LUMEN

DIMMABLE



165
LUMEN

DIMMABLE



180
LUMEN

DIMMABLE



350
LUMEN

DIMMABLE

Code	Description	Colour	Kelvin	Lumen	Dimensions
INL-G95-LED-ES-TNT	G95 6W E27 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-BC-TNT	G95 6W B22 LED Filament Lamp	Tinted	2000	580	Dia:95mm H:140mm
INL-G95-LED-ES-CLR	G95 6W E27 LED Filament Lamp	Clear	2000	650	Dia:95mm H:140mm
INL-C35L-LED-SES-TNT	C35L 2W E14 LED Filament Lamp	Tinted	2000	165	Dia:35mm H:120mm
INL-C35L-LED-SES-CLR	C35L 2W E14 LED Filament Lamp	Clear	2000	180	Dia:35mm H:120mm
INL-A60-LED-ES-TNT	A60 4W E27 LED Filament Lamp	Tinted	2200	350	Dia:60mm H:120mm

G9

COB LED LAMPS



200
LUMEN



200
LUMEN

3
PACK




200
LUMEN

6
PACK




200
LUMEN



200
LUMEN

3
PACK



200
LUMEN

6
PACK

Code	Description	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-38119	2W COB LED G9	G9	2W	3000k	200	100lm/W	360°	H:50mm Dia:14mm
INL-38120				Warm White				
INL-38122				4500k				
INL-38123				Cool White				
INL-38124								
INL-38125								

FILAMENT

LED LAMPS



600
LUMEN

DIMMABLE



600
LUMEN

DIMMABLE



400
LUMEN

DIMMABLE



400
LUMEN

DIMMABLE

Code	Bulb Shape	Cap Type	Power (w)	Colour (k)	Total Flux (lm)	Efficiency (lm/W)	Beam Angle	Dimensions
INL-36014	GLS (Classic)	B22	6W	3000k Warm White	600	100lm/W	360°	Dia:60mm H:108mm
INL-36013	GLS (Classic)	E27	6W		600			Dia:60mm H:108mm
INL-36012	Candle	E14	4W		400			Dia:35mm H:100mm
INL-36017	GLS (Classic)	B22	6W	4000k Cool White	600			Dia:60mm H:108mm
INL-36016	GLS (Classic)	E27	6W		600			Dia:60mm H:108mm
INL-36015	Candle	E14	4W		400			Dia:35mm H:100mm

G9

LED LAMPS



NEW
FOR
2023

500
LUMEN

5W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

800
LUMEN

8W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

300
LUMEN

3.5W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



NEW
FOR
2023

550
LUMEN

6.7W
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures

Warm White 3k	Cool White 4k	Description	Pack Size	Hours	Lumen	Dimmable	Dimensions
INL-42264	INL-42265	5W G9 LED Clear	Single		500lm	Non Dimmable	Dia. 16.5mm H:61mm
INL-42266	INL-42267		3 Pack				
INL-42268	INL-42269		6 Pack				
INL-42270	INL-42271	8W G9 LED Clear	Single		800lm		Dia. 18mm H:75mm
INL-42272	INL-42273		3 Pack				
INL-42274	INL-42275		6 Pack				
INL-42276	INL-42277	3.5W G9 LED Frosted	Single		300lm		Dia. 17mm H:50mm
INL-42278	INL-42279		3 Pack				
INL-42280	INL-42281		6 Pack				
INL-42282	INL-42283	6.7W G9 LED Frosted	Single		550lm	Dimmable	Dia. 21mm H:69mm
INL-42284	INL-42285		3 Pack				
INL-42286	INL-42287		6 Pack				

ANTI-GLARE

DIMMABLE GU10 LED LAMPS



Code	Description	Colour	Kelvin	Hours	Lumen	Dimmable	Dimensions
INL-41999	5W Anti-Glare GU10 LED Lamp	Black	3000k	30000	369	Yes	Dia:50mm H:56mm
INL-42000			4000k		367		
INL-42001		White	3000k		369		
INL-42002			4000k		367		
INL-42003		Chrome	3000k		369		
INL-42004			4000k		367		
INL-42005		Satin Chrome	3000k		369		
INL-42006			4000k		367		

G9

LED LAMPS



180
LUMEN



180
LUMEN

3
PACK



180
LUMEN

6
PACK



180
LUMEN



180
LUMEN

3
PACK



180
LUMEN

6
PACK

Code	Description	Pack Size	Kelvin	Lumen	Dimensions
INL-28573	2.5W G9 LED Lamp	Single	3000	180	W:16mm H:48mm
INL-28575	2.5W G9 LED Lamp	3 Pack	3000	180	W:16mm H:48mm
INL-28577	2.5W G9 LED Lamp	6 Pack	3000	180	W:16mm H:48mm
INL-28574	2.5W G9 LED Lamp	Single	4000	180	W:16mm H:48mm
INL-28576	2.5W G9 LED Lamp	3 Pack	4000	180	W:16mm H:48mm
INL-28578	2.5W G9 LED Lamp	6 Pack	4000	180	W:16mm H:48mm

GU10

LED LAMPS



400
LUMEN

320°
BEAM
ANGLE



400
LUMEN

320°
BEAM
ANGLE

Code	Description	Hours	Kelvin	Lumen	Dimmable	Dimensions
INL-34150-3K	5W LED GU10 LED Lamp	30000	3000	400	–	Dia:50mm H:53mm
INL-34151-3K	5W LED GU10 LED Lamp	30000	3000	400	Yes	Dia:50mm H:53mm
INL-34150-4K	5W LED GU10 LED Lamp	30000	4000	400	–	Dia:50mm H:53mm
INL-34151-4K	5W LED GU10 LED Lamp	30000	4000	400	Yes	Dia:50mm H:53mm

DUSK TILL DAWN



LED LAMPS



Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-29464-WW	9W LED E27 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29464-CW	9W LED E27 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm
INL-29465-WW	9W LED B22 D2D LED Lamp	40000	2700	800	Dia:60mm H:115mm
INL-29465-CW	9W LED B22 D2D LED Lamp	40000	4000	800	Dia:60mm H:115mm

CCT

LED LAMPS



- 3 colour choices
- Not dimmable
- Switch between 3000K warm white, 4000K cool white and 6000K daylight white

Code	Description	Hours	Kelvin	Lumen	Dimensions
INL-34400-CCT	6W LED GU10 LED Lamp	25000	CCT	500	Dia:50mm H:53mm
INL-34401-CCT	12W LED E27 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm
INL-35728-CCT	12W LED B22 GLS LED Lamp	25000	CCT	1050	Dia:60mm H:111mm



WORKSITE


A professional range of robust, high output and long lasting LED site lighting.

SECURITY/FLOODLIGHTS	388-395
TORCHES	396-402
PORTABLE	403-423
FESTOON	424-425

NEW
FOR
2023

Upto
16500
Lumens

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



SLIMLINE
LED Floodlight

IP65 Rated

180° Beam

6500K DW

0.5M Cable


Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38687E	Slimline LED Floodlight	20W LED	2200	0.32kg	H:120mm W:120mm Proj:33mm
SXLS38688E		30W LED	3300	0.55kg	H:158mm W:154mm Proj:33mm
SXLS38689E		50W LED	5500	0.78kg	H:193mm W:183mm Proj:33mm
SXLS38690E		100W LED	11000	1.24kg	H:233mm W:218mm Proj:33mm
SXLS38691E		150W LED	16500	1.8kg	H:268mm W:248mm Proj:33mm

NEW
FOR
2023

Upto
16500
Lumens

IP65



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



SLIMLINE

LED Floodlight with PIR Sensor



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38693E	Slimline LED Floodlight with PIR Sensor	20W LED	2200	0.35kg	H:190mm W:120mm Proj:54mm
SXLS38694E		30W LED	3300	0.78kg	H:193mm W:183mm Proj:54mm
SXLS38695E		50W LED	5500	1.24kg	H:233mm W:218mm Proj:54mm
SXLS38696E		100W LED	11000	1.8kg	H:268mm W:248mm Proj:54mm
SXLS38697E		150W LED	16500	1.83kg	H:350mm W:250mm Proj:54mm

NEW
FOR
2023

Upto
4500
Lumens

IP65



- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



FROSTED

LED Floodlight



IP65
Rated



180°
Beam



6500K
DW



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38927E	Frosted LED Floodlight	10W LED	900	0.32kg	H:80mm W:117mm Proj:55mm
SXLS38928E		20W LED	1800	0.4kg	H:100mm W:150mm Proj:55mm
SXLS38929E		30W LED	2700	0.55kg	H:120mm W:185mm Proj:55mm
SXLS38930E		50W LED	4500	0.7kg	H:145mm W:215mm Proj:55mm



NEW
FOR
2023

Upto
4500
Lumens

IP54



**MANUAL
OVERRIDE**

- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- Adjustable timer, LUX and sensitivity
- 25,000 hours lifetime



FROSTED

LED Floodlight with PIR Sensor



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38933E	Frosted LED Floodlight with PIR Sensor	10W LED	900	0.32kg	H:150mm W:117mm Proj:70mm
SXLS38934E		20W LED	1800	0.4kg	H:155mm W:150mm Proj:75mm
SXLS38935E		30W LED	2700	0.55kg	H:185mm W:185mm Proj:75mm
SXLS38936E		50W LED	4500	0.77kg	H:205mm W:215mm Proj:55mm

NEW
FOR
2023

Upto
3500
Lumens

IP65



- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



DIECAST

LED Floodlight



IP65
Rated



0.5M
Cable



6500K
DW



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38937E	Die-cast LED Floodlight	10W LED	700	0.21kg	H:105mm W:105mm Proj:45mm
SXLS38938E		20W LED	1400	0.35kg	H:130mm W:130mm Proj:45mm
SXLS38939E		30W LED	2100	0.51kg	H:165mm W:165mm Proj:45mm
SXLS38940E		50W LED	3500	0.72kg	H:200mm W:200mm Proj:45mm



NEW
FOR
2023

Upto
3500
Lumens

IP54



**MANUAL
OVERRIDE**

- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Adjustable timer, LUX and sensitivity
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

DIECAST

LED Floodlight with PIR Sensor



PIR
Sensor



IP54
Rated



0.5M
Cable



6500K
DW



Class 1

Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS38941E	Die-cast LED Floodlight with PIR Sensor	10W LED	700	0.25kg	H:160mm W:105mm Proj:78mm
SXLS38942E		20W LED	1400	0.42kg	H:185mm W:130mm Proj:78mm
SXLS38943E		30W LED	2100	0.57kg	H:215mm W:165mm Proj:78mm
SXLS38944E		50W LED	3500	0.78kg	H:240mm W:200mm Proj:78mm



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation

SLIMLINE LED Floodlight



IP65
Rated



180°
Beam



6500K
DW



0.5M
Cable



Class 1


Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS343544KBE	Slimline LED Floodlight	10W LED	800	0.18kg	H:120mm W:103mm Proj:65mm
SXLS343554KBE		20W LED	1600	0.41kg	H:162mm W:159mm Proj:85mm
SXLS343564KBE		30W LED	2400	0.41kg	H:162mm W:159mm Proj:85mm
SXLS343574KBE		50W LED	4000	0.74kg	H:180mm W:205mm Proj:115mm
SXLS343584KBE		100W LED	8000	1.37kg	H:230mm W:270mm Proj:142mm



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance
- Hrs: 20,000

SLIMLINE

LED Floodlight with PIR



Code	Description	Power (w)	Total Flux (lm)	Weight	Dimensions
SXLS343594KBE	Slimline LED Floodlight with PIR	10W LED	800	0.23kg	H:140mm W:103mm Proj:148mm
SXLS343604KBE		20W LED	1600	0.46kg	H:180mm W:158mm Proj:159mm
SXLS343614KBE		30W LED	2400	0.46kg	H:180mm W:158mm Proj:159mm
SXLS343624KBE		50W LED	4000	0.82kg	H:200mm W:205mm Proj:150mm

NEW
FOR
2023

300
Lumens

2
Modes
1 HI | 2 LO

25m

4.5
Hours



- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Magnetic design to one side
- Adjustable light angle without removing from your head
- Push button ON/OFF switch with 2 modes (low 100lm/high 300lm)
- Beam projects up to 25m
- Battery lasts up to 10 hours on low, 4.5 hours on high brightness
- Supplied with Duracell batteries



ALUMINIUM

Magnetic LED Headtorch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50100E	LED Headtorch	3W COB LED	100/300	0.10kg	3 x 1.5V AAA (included)



NEW
FOR
2023

300
Lumens

3 Modes
1 HI
2 LO
3 FL

150m

1.2/6
Hours

- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Push button ON/OFF switch with 3 modes (low 100lm/high 300lm/flash)
- Adjustable rotating focus
- Beam projects up to 150m
- Battery lasts up to 6 hours on low, 1.2 hours on high brightness
- Supplied with Duracell batteries



ALUMINIUM

Adjustable LED Headtorch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50101E	LED Headtorch	3W CREE LED	90/300	0.114kg	3 x 1.5V AAA (included)



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 45lm/high 600lm/flash)
- Rotating adjustable focus
- Beam projects up to 270m
- Battery lasts up to 20 hours on low, 2 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



600LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50102E	600lm LED Torch	5W LED	45/600	0.155kg	4 x 1.5V AAA (included)



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 50lm/high 800lm/flash)
- Rotating adjustable focus
- Beam projects up to 260m
- Battery lasts up to 50 hours on low, 18 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



800LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50103E	800lm LED Torch	7W LED	50/800	0.305kg	3 x 1.5V C (included)



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25lm/high 350lm/flash)
- Rotating adjustable focus
- Beam projects up to 175m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



350LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50105E	350lm LED Torch	3W LED	25/350	0.085kg	3 x 1.5V AAA (included)



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25lm/high 280lm/flash)
- Rotating adjustable focus
- Beam projects up to 150m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



280LM ALUMINIUM

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50106E	280lm LED Torch	3W LED	50/800	0.081kg	2 x 1.5V AA (included)



- Aluminium construction
- Rechargeable USB-C port with charge indicator
Red (charging) Green (charged)
- Push button ON/OFF switch with 3 modes
(low 350lm/high 650lm/flash)
- Rotating adjustable focus
- Beam projects up to 240m
- Battery lasts up to 9 hours on low, 5 hours on
high brightness
- Charge time 4.5hrs
- IP44 water resistant



650LM RECHARGEABLE

Adjustable LED Torch

Code	Description	Power (w)	Total Flux (lm)	Weight	Batteries
SXLS50104E	Rechargeable LED Torch	5W CREE LED	350/650	0.156kg	1 x 3.7V 2200mAh Rechargeable



NEW
FOR
2023

5200
Lumens

60W
LED

IP65

PACK
INCLUDES
WORKLIGHT
& TRIPOD



- NEW improved Twin LED work light with extendable heavy duty tripod
- Tripod has a bar clamp for fast secure fitting and a built in cord wrap
- 2m H05RN-F 3G 1.0mm cable
- 2 x 30W SMD LED for powerful energy efficient light

TWIN LED

Work Light with Tripod



3M
Cable



IP65
Rated



6000K
DW



Class 1



4.45kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS34624/31333LE	Twin Work Light with Tripod	220-240V	2 x 30W LED	5200	Dia:1160mm H:1170/1700mm


NEW
FOR
2023

Upto
1500
Lumens

IP54



- Rechargeable SAMSUNG battery cells
- Durable ABS with heavy duty rubber surround
- 25% / 50% / 100% / OFF brightness modes
- 1m H05RN-F 3G 1.0mm charging cable with IEC connector
- 2 hours run time at full brightness, 50% brightness, 5 hours & 25% brightness, 8 hours
- 4-5 hours charge time
- 25,000 hours LED lifetime



RECHARGEABLE

Work Light



Code	Description	Voltage	Battery	Lamp	Lumen	Dimensions
SXLS31329E	Rechargeable Work Light	220-240V	3.7V 4400mAh	10W LED	1000	L:58mm W:158mm H:225mm
SXLS31330E	Rechargeable Work Light	220-240V	3.7V 8800mAh	20W LED	1500	L:58mm W:158mm H:225mm



NEW
FOR
2023

4000
Lumens

50W
LED

IP54

- Durable ABS / PC body with steel legs
- Foldable stand and carry handle
- 2m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 50W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80



PLASTERERS

Area Work Light

2M
Cable

IP54
Rated

6000K
DW

Class 1

2.65kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS37673E	Plasterers Work Light	240V	50W LED	4000	L:880mm W:880mm H:1070mm





8400
Lumens

80W
LED

IP54

- 180° and 360° directional light heads helps prevent light wastage or pollution
- Telescopic pole with manual quick release handles for speedy height adjustment
- Adjustable height from 1.5 to 2m
- Integrated carry handle
- Each head can be switched ON/OFF independently
- 3m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet



360° AREA Tower Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37182E	360° Area Tower Light	80W	6500	8600	H:1500-2000mm Dia:920mm



4800
Lumens

IP65

60W
LED



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

TWIN

2 x 30W Worklight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37952E	Twin 2 x 30W Worklight	60W	4000	4800	L:175mm W:485mm H:315mm



3000
Lumens

40W
LED

IP65

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

TWIN

2 x 20W Worklight



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS3795IE	Twin 2 x 20W Worklight	40W	4000	3000	L:175mm W:485mm H:315mm



Upto
4000
Lumens

IP44

3
SIZES
AVAILABLE

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 1.5m H05RN-F 3G 1.0mm cable



PORTABLE

Work Light



1.5M
Cable



IP44
Rated



4000K
CW



Class 1

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS36383E	Folding Work Light	20W	4000	1600	1kg	L:115mm x W:190mm x H:290mm
SXLS35584E		30W	4000	2400	1.25	L:145mm W:220mm H:320mm
SXLS35585E		50W	4000	4000	1.45	L:185mm W:250mm H:330mm



Upto
3600
Lumens

IP65

3
SIZES
AVAILABLE

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm cable

FOLDING

Work Light



Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Weight (kg)	Dimensions
SXLS35525E	Folding Work Light	20W	4000	1500	0.93	L:165mm x W:225mm x H:275mm
SXLS35526E		30W	4000	2200	1.28	L:185mm W:250mm H:335mm
SXLS35527E		50W	4000	3600	1.7	L:185mm W:280mm H:375mm



8400
Lumens

120W
LED

IP65

IK10

- Tripod mountable
- Durable polycarbonate body
- Heavy duty shockproof base
- 360° beam angle for shadow free illumination
- 5m H05RN-F 3G 1.5mm cable
- IK10 vandal resistant
- 120W LED module (SMD)
- K: 6000
- Lm/W: 70

AREA

Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31324ES	Area Work Light	110V	120W LED	8400	L:349mm W:347mm H:436mm



7500
Lumens

50W
LED

IP65



- EVE Energy rechargeable battery cells
- Durable steel frame and die-cast aluminium body
- Battery: 6 x 3.7V 2600mAh
- 20% / 60% / 100% / OFF brightness modes
- Run time
 - 100% - 4 hours
 - 60% 9 hours
 - 20% 12 hours
- 5-6 hours charge time
- 25,000 hours LED lifetime

RECHARGEABLE

Folding Worklight



Recharge-
able



IP65
Rated



6000K
DW



Class 3



1.65kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
SXLS37177E	Rechargeable Worklight	20W	6000	3000	L:185mm W:229mm H:285mm
SXLS37178E	Rechargeable Worklight	30W	6000	4500	L:195mm W:260mm H:320mm
SXLS37179E	Rechargeable Worklight	50W	6000	7500	L:220mm W:300mm H:385mm

NEW

2600
Lumens

30W
LED

IP54



- 3m H07RN-F 3G 1.5mm cable
- 1 x external socket outlet
- Magnetic base
- Hanging hook
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



MAGNETIC & LINKABLE

Globe Area Light



3M
Cable



IP54
Rated



6000K
DW



1.93kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS36986E	Globe Area Light	220-240V	30W LED	2600	H:260mm W:200mm D:210mm



2100
Lumens

35W
LED

IP44

- Durable ABS / PC body
- Heavy duty rubber surround
- Folding carry handle acts as a stand and wall mountable fixture
- 5m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 35W LED module (SMD)
- K: 6000
- Lm: 2100
- Lm/W: 70



PORTABLE

Work Light



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31326E	Portable Work Light	220-240V	35W LED	2100	L:120mm W:270mm H:275mm

4000
Lumens

50W
LED

IK10



- Durable ABS / PC body
- Heavy duty shockproof base with moulded carry handle
- IK10 impact resistant for tough working environments
- 2 x external socket outlets
- 5m H05RN-F 3G 1.5mm cable
- 50W LED module (SMD)
- Lm/W: 80



PANEL

Work Light



5M
Cable



IK10



IP44
Rated



6000K
DW



Class 1



2.96kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31325ES	Panel Work Light	110V	50W LED	4000	L:150mm W:300mm H:465mm



4000
Lumens

33W
LED

IP65

- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 33W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80
- Hrs: 20,000



- Fits tripod SXLS31333E

WORK LIGHT



Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31331E	Work Light	220-240V	33W LED	4000	L:183mm W:215mm H:330mm





8000
Lumens

66W
LED

IP65

- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 2 x 33W LED module (SMD)
- K: 6000
- Lm: 8000
- Lm/W: 80
- Hrs: 20,000



• Fits tripod SXLS31333E

WORK LIGHT

2M
Cable

IP65
Rated

6000K
DW

Class 2

4.45kg

Code	Description	Voltage	Lamp	Lumen	Dimensions
SXLS31332E	Twin Work Light	220-240V	2 x 33W LED	8000	L:183mm W:540mm H:370mm





**Upto
3900
Lumens**

IP65

- Durable die-cast body with plastic protective bumpers
- Foldable stand for easy storage and transportation
- 1.8m H05RN-F 3G 1.0mm cable

FOLDING Work Light



Code	Description	Voltage	Lamp	Lumen	Weight	Dimensions
SXLS31334E	Folding Work Light	220-240V	10W LED	800	1.6kg	L:235mm W:276mm H:283mm
SXLS31335E	Folding Work Light	220-240V	20W LED	1500	1.7kg	L:245mm W:292mm H:295mm
SXLS31336E	Folding Work Light	220-240V	30W LED	2100	1.84kg	L:255mm W:332mm H:295mm
SXLS31337E	Folding Work Light	220-240V	50W LED	3900	1.92kg	L:255mm W:322mm H:295mm



**Upto
1800
Lumens**

IP65



- Durable die-cast body with plastic protective bumpers
- 30% / 50% / 100% / OFF brightness modes
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm charging cable
- USB charging port with Android & IOS compatibility

RECHARGEABLE Folding Work Light



Code	Description	Battery	Charge-Time	Run-Time (100%)	Lamp	Lumen	Weight	Dimensions
SXLS31338E	Rechargeable Folding Work Light	2 x 2200mAh	3 Hours	3 Hours	8W LED	600	1.6kg	L:235mm W:276mm H:283mm
SXLS31339E		4 x 2200mAh	4.5 Hours	3 Hours	18W LED	1350	1.7kg	L:245mm W:292mm H:295mm
SXLS31340E		6 x 2200mAh	4.5 Hours	3 Hours	24W LED	1800	1.8kg	L:255mm W:332mm H:295mm



NEW

4500
Lumens

50W
LED

IP54

- 3 Lighting Heads (Side lights adjustable)
- 1.5M H05RN-F 3G 1.5mm cable
- 3 Switch modes 4500LM / 2250LM / OFF
- Quick release mechanism
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



Multi Directional Work Light



1.5M
Cable



IP54
Rated



6000K
DW



2.15kg

Code	Description	Power (w)	Colour (k)	Total Flux (lm)	Dimensions
v	Multi Directional Work Light	50W	6000	2600	H:235mm (w/o handle) W:405mm D:185mm

HEAVY DUTY TRIPOD



- Tough powder coated finish to prevent rust and corrosion
- Bar clamp for fast and secure fitting
- Locking mechanism securely locks legs into position
- Collapsible for easy transportation
- Height adjustable up to 1.4m
- Steel construction
- Built-in cord wrap function for easy storage

Code	Description	Colour	Weight	Dimensions
SXLS31333E	Heavy duty tripod	Black	2.24kg	Dia:780mm H:1400mm



**800
Lumens**

**10W
LED**

IP44



- Durable ABS / PC body
- 10 x E27 lampholders with protective guards
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- 10 x 10W LED lamps included

FESTOON

10 Light



Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31361E	10 Light Festoon	220-240V	10 x 10W Max LED E27 GLS	800	H:182mm Dia:115mm



6400
Lumens

80W
LED

IP44



- Durable ABS / PC construction
- 10 x 8W LED lamps
- 22m H05RN-F 3G 1.5mm cable
- 10 x 8W LED module (SMD)
- Lm: 6400
- Lm/W: 80

LED FESTOON

10 Light



Code	Description	Voltage	Lamp	Lumen	Dimensions (Each Head)
SXLS31362ES	10 Light LED Festoon	110V	10 x 8W LED	10 x 640	H:67mm Dia:115mm
SXLS31362E	10 Light LED Festoon	240V	10 x 8W LED	10 x 640	H:67mm Dia:115mm

MARKETING.

At Forum we offer a variety of Point of Sale and Marketing material, from counter top to wall board and ceiling displays.

Please speak to your internal or local sales person for more details.





INFORMATION

LIGHTING TERMS

Bathroom Zone

Suitability for a product to be installed near or in water.

CCT

Colour Chaning Technology.

Colour Switchable

Colour temperature can be switched between 3000K to 4000K or 6000K.

Cool White (CW) 4000K

Light with a CCT kelvin temperature of 4000K.

Daylight White (DW) 6000K

Light with a CCT kelvin temperature of 6000K.

Downlight

A luminaire designed to be installed in a ceiling, with the light source pointed vertically downwards.

Floodlight

A luminaire featuring a wide beam angle, designed to provide illumination over a wide area.

IK Rating

Indicates the protection against mechanical impact. Rated from IK00 to IK10.

IP Rating

Ingress Protection Rating.

Kelvin (K)

Kelvin is the scientific unit for measuring CCT.

LED (Light Emitting Diode)

Emits light through the conversion of electrical energy.

Lifetime

The definition of LED luminaire lifetime is the period in hours after which the luminaire no longer delivers the correct amount of light,

either insufficient light is produced or none at all. This may be a combination of many factors not limited to just the LED performance.

Lumens (lm)

The quantity of light emitted from a light source that is visible. The higher the lumens, the brighter the light.

LUX

A measure of the intensity of light, defined as 1lm /m².

Microwave Sensor

An active intrusion sensor that detects the movement of a person or object through a pattern of microwave energy

Photocell

Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached

PIR Sensor

Passive Infrared Device, used to activate lighting when a person enters a room or area.

Power Supply / Driver

Power source for the LED luminaire.

RGB

Red, Green, Blue. Used to describe colour changing products that can be used to dynamically add colour to any environment.

RGBW

Stands for Red, Green, Blue, White. Used to describe colour changing products that can be used to dynamically add colour to any environment. Can also be run on white when natural lighting is required.

Spotlight

A light source featuring a narrow beam angle, designed to allow highlighting or illumination of specific features in an area.

Task Lighting

Lighting specifically designed to provide functional illumination of an environment.

Warm White (WW) 3000K

Light with a CCT kelvin temperature of 3000K.

Watt (W)

The unit of electrical power stating the amount of electricity consumed by the product.

Work Lighting

Lighting specifically designed to provide functional illumination of a work site environment.

COLOUR TEMPERATURE

GUIDE

LEDs make it possible to have a choice of white colours or ‘tones’. This allows easy customisation of an area to bring out the best in the materials and design of a room. With standard white LED lighting, these tones range from warm-yellow, to daylight-blue light, with options in between. The graphic below is a reference that starts at a warm yellow colour on the left and fades into a blue colour on the right.

Colour temperature ratings describe the tones of white light available. Colour temperature options range from 2000-3000K for Warm White lighting, 3100-4500 for Cool White lighting and 4600-6500 for Daylight White lighting. It can be a tricky decision to know what is best for your installation, but our skilled technical sales team are on hand to guide you through choosing the perfect white tone for your room.



Colour temperature	2000-3000K	3100-4500K	4600-6500K
Light appearance	Warm White	Cool White	Daylight White
Best for	Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas	Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in contemporary kitchens and bathroom to complement décor	Perfect for industrial, security, garages and task lighting where the most natural lighting is required

IP RATING

INGRESS PROTECTION

Ingress protection rating (IP); this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and outdoor environments. Written as IPXX, the first X denotes the level of protection offered from dust; the second X denotes the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

SOLID OBJECTS		LIQUIDS	
0	No special protection	0	No special protection
1	Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter	1	Protected against dripping water; vertically falling drops
2	Protection against fingers or other objects not greater than 80mm in length and 12mm in diameter	2	Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical; limited ingress permitted
3	Protection from entry by tools, wires etc, with a diameter of 2.5mm or more	3	Protected against sprays of water up to 60 degrees from the vertical; limited ingress permitted
4	Protection against solid bodies larger than 1mm	4	Protection from splashing water from any direction
5	Protection against dust that may harm equipment	5	Protection against low pressure water jets (all directions)
6	Totally dust-tight; no ingress of dust	6	Protection against high pressure water jets and waves
		7	Protection against temporary immersion
		8	Watertight against the effects of immersion in water under pressure for long periods

Ingress protection ----- **IP65**

BATHROOM ZONING

WHAT IS BATHROOM ZONING?


All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone. To illustrate IP zoning regulations, the bathroom area is divided up into areas or 'ZONES'. Light fittings are then assigned an 'IP rating' which indicates how much protection they provide against ingress of water and other particles. Each zone has a minimum IP requirement that must be met if a fitting is to be installed in this area.

Zone 0 $\geq$ IPX7

Inside bath or shower. Only 12V AC rms or 30V ripple-free DC SELV fittings with a minimum rating of IPX7 (protected against immersion in water). Transformers must be sited outside Zones 0,1,2.

Zone 1 $\geq$ IPX5

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

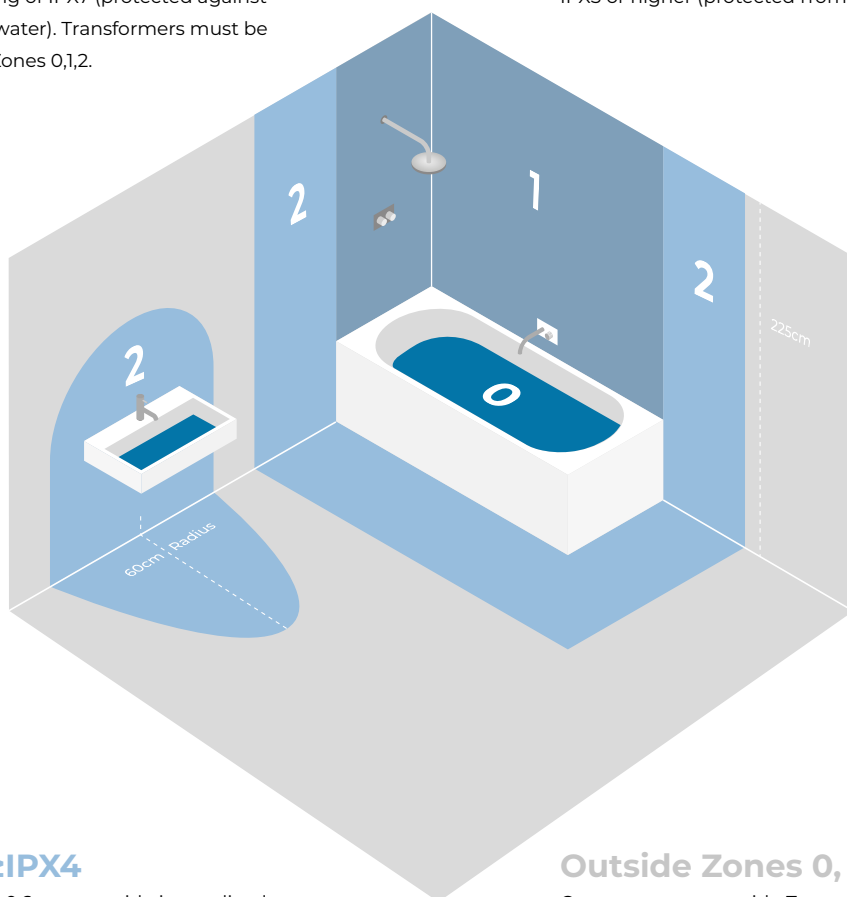

Zone 2 $\geq$ IPX4

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

Outside Zones 0, 1 & 2

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

INDEX.

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.

INDEX (ALPHABETICAL)

CUL-21624	311	CUL-30703	201/338	CUL-37800	331
CUL-21625	311	CUL-30704	201/338	CUL-40031	320
CUL-21626	310	CUL-30705	201/338	CUL-40032	320
CUL-21627	311	CUL-30706	201/338	CUL-40033	320
CUL-21637	334	CUL-30707	201/338	CUL-40034	320
CUL-21638	334	CUL-30708	201/338	CUL-40035	320
CUL-21639	334	CUL-30709	201/338	CUL-40036	320
CUL-21643	336	CUL-30710	339/203	CUL-40037	321
CUL-21645	336	CUL-30711	339/203	CUL-40038	321
CUL-21647	336	CUL-33996-BLK	336	CUL-40039	321
CUL-21649	336	CUL-33996-WHT	336	CUL-40040	321
CUL-21651	336	CUL-34223-CCT	316	CZ-20947-BLK	161
CUL-21653	336	CUL-34224-CCT	316	CZ-25142-BLK	161
CUL-21656	335	CUL-34225-CCT	316	CZ-25143-BLK	171
CUL-21658	335	CUL-34226-CCT	316	CZ-25144-BLK	170
CUL-21660	334	CUL-35860	313	CZ-25145-BLK	154
CUL-21661	315	CUL-35861	313	CZ-25148-BLK	152
CUL-21662	315	CUL-35864	312	CZ-25149-BLK	153
CUL-21663	315	CUL-35865	313	CZ-25150-BLK	154
CUL-21664	315	CUL-37386	317	CZ-26743-BLK	155
CUL-21665	314	CUL-37387	317	CZ-29191-ATR	176
CUL-21666	314	CUL-37388	317	CZ-29192-ATR	175
CUL-25218	311	CUL-37389	317	CZ-29193-ATR	175
CUL-25219	310	CUL-37768	328	CZ-29319-ANTH	173
CUL-25220	311	CUL-37769	328	CZ-29319-BLK	173
CUL-25317	311	CUL-37770	328	CZ-29319-SST	173
CUL-25318	311	CUL-37771	328	CZ-29320-ANTH	171
CUL-25319	310	CUL-37772	329	CZ-29320-BLK	171
CUL-25320	311	CUL-37773	329	CZ-29320-SST	171
CUL-25321	315	CUL-37774	329	CZ-29321-ANTH	173
CUL-25322	315	CUL-37775	330	CZ-29321-BLK	173
CUL-25323	315	CUL-37776	330	CZ-29321-SST	173
CUL-25324	315	CUL-37777	330	CZ-31740-BLK	168
CUL-26332	334	CUL-37778	330	CZ-31743-BLK	167
CUL-26333	334	CUL-37779	330	CZ-31744-BLK	170
CUL-26334	334	CUL-37780	330	CZ-31745-BLK	167
CUL-26335	334	CUL-37781	330	CZ-31746-BLK	168
CUL-26336	336	CUL-37782	330	CZ-31747-BLK	177
CUL-26337	336	CUL-37783	329	CZ-31748-BLK	155
CUL-26338	336	CUL-37784	329	CZ-31749-BLK	177
CUL-26339	336	CUL-37785	329	CZ-31750-BLK	166
CUL-26340	336	CUL-37786	328	CZ-31751-BLK	167
CUL-26341	336	CUL-37787	324	CZ-31752-BLK	177
CUL-26342	336	CUL-37788	324	CZ-31806-BLK	179
CUL-26344	335	CUL-37789	324	CZ-31811-BLK	158
CUL-26345	335	CUL-37790	324	CZ-31812-BLK	158
CUL-26346	334	CUL-37791	326	CZ-33397-BLK	163
CUL-26465	337/75	CUL-37792	326	CZ-33461-BLK	159
CUL-26465-WW	337/75	CUL-37793	327	CZ-34014-BLK	165
CUL-30698	201/338	CUL-37794	327	CZ-34015-BLK	165
CUL-30699	201/338	CUL-37795	323	CZ-34016-BLK	166
CUL-30700	201/338	CUL-37796	323	CZ-34017-BLK	166
CUL-30701	201/338	CUL-37797	322	CZ-34023-BLK	163
CUL-30702	201/338	CUL-37798	322	CZ-34025-BLK	160

INDEX (ALPHABETICAL)

CZ-34026-BLK	160	ELA-34299	0	ELA-41712	200
CZ-34027-BLK	160	ELA-34300	195	ELA-41713	200
CZ-35704-BLK	169	ELA-34301	195	ELA-41714	200
CZ-35705-BLK	169	ELA-34302	195	ELA-41715	200
CZ-35742-BLK	155	ELA-34303	195	ELA-41718	199
CZ-38639-ANTH	157	ELA-34304	195	ELA-41719	199
CZ-38639-BLK	157	ELA-34305	195	ELA-41720	199
CZ-38639-WHT	0	ELA-34306	194	ELA-41721	199
CZ-41087-BLK	180	ELA-34307	194	ELA-41722	199
CZ-41088-BLK	180	ELA-34308	194	ELA-41723	199
CZ-41089-BLK	180	ELA-34857	185	ELA-41724	199
CZ-41090-BLK	180	ELA-34858	185	ELA-41725	199
CZ-41091-BLK	181	ELA-34859	185	ELA-41726	199
CZ-41092-BLK	181	ELA-34860	187	ELA-41727	199
CZ-41093-BLK	181	ELA-34861	187	ELA-41728	199
ELA-21665	200	ELA-34862	187	ELA-41729	199
ELA-21666	200	ELA-34871	188	INL-23519-BLK	363
ELA-27465-BCHR	212/271	ELA-34872	189	INL-23519-GRY	363
ELA-27465-CHR	212/271	ELA-34873	191	INL-23519-HERR	363
ELA-27465-MBLK	212/271	ELA-34874	0	INL-23519-RED	363
ELA-27465-SATBRS	212/271	ELA-34875	0	INL-27988-ABRS	365
ELA-27465-SCHR	212/271	ELA-34876	0	INL-27988-ACOP	365
ELA-27465-WHT	212/271	ELA-35743	205	INL-27988-BRZ	365
ELA-27466-BCHR	211/270	ELA-35744	205	INL-27988-PEW	365
ELA-27466-CHR	211/270	ELA-35745	205	INL-27988-SNIC	365
ELA-27466-MBLK	211/270	ELA-35746	205	INL-28201-BCHR	349
ELA-27466-SATBRS	211/270	ELA-35747	0	INL-28202-BCHR	349
ELA-27466-SCHR	211/270	ELA-35748	0	INL-28203-BCHR	349
ELA-27466-WHT	211/270	ELA-35749	0	INL-28204-BCHR	350
ELA-27467-BCHR	213/269	ELA-35750	193	INL-28205-BCHR	350
ELA-27467-CHR	213/269	ELA-35751	193	INL-28573	382
ELA-27467-MBLK	213/269	ELA-35752	193	INL-28574	382
ELA-27467-SATBRS	213/269	ELA-35753	193	INL-28575	382
ELA-27467-SCHR	213/269	ELA-36974	195	INL-28576	382
ELA-27467-WHT	213/269	ELA-36975	195	INL-28577	382
ELA-34280	185	ELA-37513	197	INL-28578	382
ELA-34281	185	ELA-37514	197	INL-29464-CW	384
ELA-34282	185	ELA-37515	197	INL-29464-WW	384
ELA-34283	187	ELA-37516	197	INL-29465-CW	384
ELA-34284	187	ELA-37517	198	INL-29465-WW	384
ELA-34285	187	ELA-37518	198	INL-31723-BLK	353
ELA-34286	196	ELA-37519	198	INL-31723-SBRS	353
ELA-34287	196	ELA-37520	198	INL-31723-SNIC	353
ELA-34288	0	ELA-37521	198	INL-31723-WHT	353
ELA-34289	0	ELA-37522	198	INL-31775-BLK	352
ELA-34290	188	ELA-37801	329	INL-31775-SBRS	352
ELA-34291	189	ELA-37802	329	INL-31775-SNIC	352
ELA-34292	196	ELA-37803	329	INL-31775-WHT	352
ELA-34293	196	ELA-38126	197	INL-31776-BLK	352
ELA-34294	0	ELA-38872	0	INL-31776-SBRS	352
ELA-34295	0	ELA-38873	0	INL-31776-SNIC	352
ELA-34296	191	ELA-38874	0	INL-31776-WHT	352
ELA-34297	196	ELA-38875	0	INL-31789-ACOP	369
ELA-34298	0	ELA-38876	0	INL-31790-BCR	350

INDEX (ALPHABETICAL)

INL-33136-SMK	372	INL-37829	367	INL-42273	380
INL-33140-ACOP	372	INL-37839	366	INL-42274	380
INL-33818-ABRS	371	INL-37877	369	INL-42275	380
INL-33818-ACOP	371	INL-37878	369	INL-42276	380
INL-33818-MBLK	371	INL-37894-BCOP	362	INL-42277	380
INL-33818-MGRY	371	INL-37894-BRZ	362	INL-42278	380
INL-33818-PNIC	371	INL-37894-PEW	362	INL-42279	380
INL-33819-ABRS	371	INL-38119	378	INL-42280	380
INL-33819-ACOP	371	INL-38120	378	INL-42281	380
INL-33819-MBLK	0	INL-38122	378	INL-42282	380
INL-33819-MGRY	371	INL-38123	378	INL-42283	380
INL-33819-PNIC	371	INL-38124	378	INL-42284	380
INL-34028-AMB	375	INL-38125	378	INL-42285	380
INL-34028-SMK	375	INL-38239-BRZ	373	INL-42286	380
INL-34029-AMB	375	INL-38239-PEW	373	INL-42287	380
INL-34029-SMK	375	INL-38239-SNIC	373	INL-598310-SNIC	349
INL-34030-AMB	375	INL-38609	346	INL-598410-SNIC	348
INL-34030-SMK	375	INL-38610	346	INL-740000-SNIC	348
INL-34031-AMB	375	INL-38611	346	INL-A60-LED-ES-TNT	377
INL-34031-SMK	375	INL-38612	347	INL-C35L-LED-SES-CLR	377
INL-34150-3K	383	INL-38613	347	INL-C35L-LED-SES-TNT	377
INL-34150-4K	383	INL-38617-BLK	356	INL-G80-LED-BC-CLR	376
INL-34151-3K	383	INL-38617-SBRS	356	INL-G80-LED-BC-TNT	376
INL-34151-4K	383	INL-38617-SNIC	356	INL-G80-LED-ES-CLR	376
INL-34400	385	INL-38617-WHT	356	INL-G80-LED-ES-TNT	376
INL-34401	385	INL-38618-BLK	356	INL-G95-LED-BC-CLR	0
INL-34556-WHT	361	INL-38618-SBRS	356	INL-G95-LED-BC-TNT	377
INL-34557-WHT	360	INL-38618-SNIC	356	INL-G95-LED-ES-CLR	377
INL-34558-WHT	0	INL-38618-WHT	356	INL-G95-LED-ES-TNT	377
INL-34942-ABRS	373	INL-38619-BLK	357	INL-ST64-LED-BC-CLR	376
INL-34942-ACOP	373	INL-38619-SBRS	357	INL-ST64-LED-BC-TNT	376
INL-34942-SNIC	373	INL-38619-SNIC	357	INL-ST64-LED-ES-CLR	376
INL-35728	385	INL-38619-WHT	357	INL-ST64-LED-ES-TNT	376
INL-36012	379	INL-41730-BLK	332	SP-25202-CHR	300
INL-36013	379	INL-41730-WHT	332	SP-25203-CHR	301
INL-36014	379	INL-41731-BLK	333	SP-25204-CHR	298
INL-36015	379	INL-41731-WHT	333	SP-25211-CHR	307
INL-36016	379	INL-41999	381	SP-25253-CHR	306
INL-36017	379	INL-42000	381	SP-25254-CHR	304
INL-37211	342	INL-42001	381	SP-25255-CHR	305
INL-37213	342	INL-42002	381	SP-25256-CHR	303
INL-37214	342	INL-42003	381	SP-31449-CHR	302
INL-37215	347	INL-42004	381	SP-31450-CHR	299
INL-37216	347	INL-42005	381	SPA-19713-CHR	243
INL-37217	347	INL-42006	381	SPA-19713-SBRS	243
INL-37218	347	INL-42264	380	SPA-19714-CHR	241
INL-37219	344	INL-42265	380	SPA-19714-SBRS	241
INL-37220	345	INL-42266	380	SPA-20182-CHR	244
INL-37221	344	INL-42267	380	SPA-20182-SBRS	244
INL-37222	345	INL-42268	380	SPA-20829-CHR	254
INL-37223	345	INL-42269	380	SPA-20829-MBLK	254
INL-37224	344	INL-42270	380	SPA-20829-SBRS	254
INL-37225	343	INL-42271	380	SPA-20831-CHR	245
INL-37226	343	INL-42272	380	SPA-20831-SBRS	245

INDEX (ALPHABETICAL)

SPA-22560	261	SPA-33932-CHR	239	SPA-35727	277/355
SPA-22560-BRS	261	SPA-33974-CHR	238	SPA-35782-CHR	222
SPA-22560-MBLK	261	SPA-34008-WHT	265	SPA-35783-CHR	222
SPA-24467-CHR	247	SPA-34009-WHT	267	SPA-35808-CHR	222
SPA-24467-SBRS	247	SPA-34010-SNIC	265	SPA-35809-CHAMP	223
SPA-24468-CHR	247	SPA-34011-SNIC	267	SPA-35809-CHR	223
SPA-24468-SBRS	247	SPA-34012-CHR	265	SPA-35810-CHAMP	223
SPA-24677-CHR	233	SPA-34013-CHR	267	SPA-35810-CHR	223
SPA-24678-CHR	234	SPA-34035	283	SPA-35811-CHAMP	224
SPA-24869-BRS	246	SPA-34036	284	SPA-35811-CHR	224
SPA-24869-SBRS	246	SPA-34037	285	SPA-35828-CHR	225
SPA-24870-CHR	246	SPA-34038	286	SPA-35828-SBRS	225
SPA-24870-SBRS	246	SPA-34039	287	SPA-35829-CHR	225
SPA-24871-BRS	246	SPA-34046-BRS	262	SPA-35829-SBRS	225
SPA-24871-SBRS	246	SPA-34046-CHR	262	SPA-35830-CHR	224
SPA-27405-BRS	260	SPA-34046-SBLK	262	SPA-35830-SBRS	224
SPA-27405-CHR	260	SPA-34046-SNIC	262	SPA-35836-CHR	226
SPA-27405-MBLK	260	SPA-34047-BRS	262	SPA-35836-SBRS	226
SPA-28326-CHR	249	SPA-34047-CHR	262	SPA-35837-CHR	226
SPA-28327-CHR	249	SPA-34047-SBLK	262	SPA-35837-SBRS	226
SPA-29195-CHR	249	SPA-34047-SNIC	262	SPA-35838-CHR	227
SPA-30841-BRCOP	279/354	SPA-34049-BRS	263	SPA-35838-SBRS	227
SPA-30841-MBLK	279/354	SPA-34049-CHR	263	SPA-35839-CLR	229
SPA-30841-MWHT	279/354	SPA-34049-SBLK	263	SPA-35839-SMK	229
SPA-30842-CHR	279/354	SPA-34049-SNIC	263	SPA-35840-CLR	228
SPA-30842-SBRS	279/354	SPA-34050-BRS	263	SPA-35840-SMK	228
SPA-30842-SCHR	279/354	SPA-34050-CHR	263	SPA-35841-CLR	228
SPA-30993-CHR	280/359	SPA-34050-SBLK	263	SPA-35841-SMK	228
SPA-30993-MBLK	280/359	SPA-34050-SNIC	263	SPA-35842-CLR	0
SPA-30993-SBRS	280/359	SPA-34864	0	SPA-35842-SMK	0
SPA-30993-SNIC	280/359	SPA-34865	295	SPA-35843-CHR	229
SPA-31292-CHR	0	SPA-35080-CHR	259	SPA-35843-SBRS	229
SPA-31306-BRS	253	SPA-35081-CHR	259	SPA-36128-SBRS	0
SPA-31306-CHR	253	SPA-35706	289	SPA-36129-CHR	230
SPA-31306-MBLK	253	SPA-35707	291	SPA-36130-MBLK	231
SPA-31309-BRS	254	SPA-35708	293	SPA-36140-CHR	231
SPA-31309-CHR	254	SPA-35709	266	SPA-36300-CHR	219
SPA-31309-MBIK	254	SPA-35710	268	SPA-36301-CHR	219
SPA-31725-CHR	252	SPA-35711	265	SPA-36302-CHR	221
SPA-31725-SBRS	252	SPA-35712	265	SPA-36303-CHR	221
SPA-31726-CHR	251	SPA-35713	266	SPA-36309-CHR	220
SPA-31726-SBRS	251	SPA-35714	266	SPA-36310-CHR	220
SPA-31730-CHR	256	SPA-35715	266	SPA-36311-CHR	220
SPA-31731-CHR	256	SPA-35716	266	SPA-37152	0
SPA-31732-CHR	255	SPA-35717	267	SPA-37153	294
SPA-31733-CHR	255	SPA-35718	267	SPA-38570-ACOP	274/209
SPA-31734-CHR	255	SPA-35719	268	SPA-38570-BCHR	274/209
SPA-31735-CHR	257	SPA-35720	268	SPA-38570-CHR	274/209
SPA-31736-CHR	258	SPA-35721	268	SPA-38570-MWHT	274/209
SPA-31737-CHR	258	SPA-35722	268	SPA-38570-SBLK	274/209
SPA-31780-CHR	257	SPA-35723	277/355	SPA-38570-SBRS	274/209
SPA-33929-CHR	235	SPA-35724	277/355	SPA-38570-SNIC	274/209
SPA-33930-CHR	237	SPA-35725	277/355	SPA-38571-ACOP	274/209
SPA-33931-CHR	239	SPA-35726	277/355	SPA-38571-BCHR	274/209

INDEX (ALPHABETICAL)

SPA-38571-CHR	274/209	SXLS31361E	424	34355	394
SPA-38571-MWHT	274/209	SXLS31362E	425	34356	394
SPA-38571-SBLK	274/209	SXLS31362ES	425	34357	394
SPA-38571-SBRS	274/209	SXLS31540E	0	34358	394
SPA-38571-SNIC	274/209	SXLS34624/31333LE	403	34359	395
SPA-38572-ACOP	210/275	SXLS35525E	411	34360	395
SPA-38572-BCHR	210/275	SXLS35526E	411	34361	395
SPA-38572-CHR	210/275	SXLS35527E	411	34362	395
SPA-38572-MWHT	210/275	SXLS36383E	410	ZN-20930-BLK	30
SPA-38572-SBLK	210/275	SXLS36384E	410	ZN-20930-SIL	30
SPA-38572-SBRS	210/275	SXLS36385E	410	ZN-20941-Anth	13
SPA-38572-SNIC	210/275	SXLS36986E	414	ZN-20941-BLK	13
SPA-38573-CHR	218	SXLS37177E	413	ZN-20941-COP	13
SPA-38573-SBRS	218	SXLS37178E	413	ZN-20941-POLSST	13
SPA-38573-TBLK	218	SXLS37179E	413	ZN-20941-SST	13
SPA-38574-CHR	221	SXLS37180E	0	ZN-20941-WHT	13
SPA-38575-CHR	221	SXLS37182E	407	ZN-20944-ANTH	47
SPA-38576-CHR	218	SXLS37673E	405	ZN-20944-BLK	47
SPA-38576-SBRS	218	SXLS37951E	409	ZN-20944-SIL	47
SPA-38576-TBLK	218	SXLS37952E	408	ZN-20945-BLK	46
SPA-38577-BRCOP	277/355	SXLS38687E	388	ZN-20945-SST	46
SPA-41111-BLK	272/207	SXLS38688E	388	ZN-20955-BLK	57
SPA-41111-CHR	272/207	SXLS38689E	388	ZN-20955-DOVG	57
SPA-41111-SBRS	272/207	SXLS38690E	388	ZN-20955-IVO	57
SPA-41111-WHT	272/207	SXLS38691E	388	ZN-20955-MINT	57
SPA-41112	208/273	SXLS38693E	389	ZN-20955-PBLU	57
SPA-41223-CHR	216	SXLS38694E	389	ZN-20957-BLK	55
SPA-41224-SBRS	216	SXLS38695E	389	ZN-20957-DOVG	55
SPA-41225-SBLK	216	SXLS38696E	389	ZN-20957-IVO	55
SPA-41694-CHR	217	SXLS38697E	389	ZN-20957-MINT	55
SPA-41694-MBLK	217	SXLS38927E	390	ZN-20957-PBLU	55
SPA-41694-SNIC	217	SXLS38928E	390	ZN-20965-BLK	69
SPA-6888.014	281	SXLS38929E	390	ZN-20965-SST	69
SPA-6888.014-SBRS	281	SXLS38930E	390	ZN-23454-BLK	83
SPA-PR-12744	278	SXLS38933E	391	ZN-23454-WHT	83
SPA-PR13145	282	SXLS38934E	391	ZN-24507-SST	58
SPA-PR13145-MBLK	282	SXLS38935E	391	ZN-25151-BLK	115
SPA-PR13145-SBRS	282	SXLS38936E	391	ZN-25151-DGRY	115
SPA-PR-17146	279	SXLS38937E	392	ZN-25151-WHT	115
SXLS31324ES	412	SXLS38938E	392	ZN-25152-BLK	119
SXLS31325ES	416	SXLS38939E	392	ZN-25152-DGRY	119
SXLS31326E	415	SXLS38940E	392	ZN-25152-WHT	119
SXLS31329E	404	SXLS38941E	393	ZN-25153-WHT	120
SXLS31330E	404	SXLS38942E	393	ZN-25154-WHT	117
SXLS31331E	417	SXLS38943E	393	ZN-25155-WHT	120
SXLS31332E	419	SXLS38944E	393	ZN-25156-BLK	121
SXLS31333E	423	SXLS50100E	396	ZN-25340-SST	61
SXLS31334E	421	SXLS50101E	397	ZN-25463-BLK	60
SXLS31335E	421	SXLS50102E	398	ZN-25464-BLK	60
SXLS31336E	421	SXLS50103E	399	ZN-26536-ANTH	19
SXLS31337E	421	SXLS50104E	402	ZN-26536-BLK	19
SXLS31338E	421	SXLS50105E	400	ZN-26536-COP	19
SXLS31339E	421	SXLS50106E	401	ZN-26536-SST	19
SXLS31340E	421	34354	394	ZN-26536-WHT	19

INDEX (ALPHABETICAL)

ZN-28708-BLK	61	ZN-33394-SST	67	ZN-37939-COP	15
ZN-28708-SST	61	ZN-33460-BLK	33	ZN-37939-SST	0
ZN-29177-WHT	117	ZN-33460-SST	33	ZN-37939-WHT	15
ZN-29179-ANTH	14	ZN-33579-BLK	115	ZN-37940-ANTH	17
ZN-29179-BLK	14	ZN-33579-DGRY	115	ZN-37940-BLK	17
ZN-29179-COP	14	ZN-33579-WHT	115	ZN-37940-COP	17
ZN-29179-SST	14	ZN-33615-BLK	116	ZN-37940-SST	17
ZN-29180-BLK	21	ZN-33615-WHT	116	ZN-37940-WHT	17
ZN-29180-SST	21	ZN-33994-BLK	61	ZN-38205-ANTH	45
ZN-29181-BLK	30	ZN-33995-BLK	61	ZN-38205-BLK	45
ZN-29181-SIL	30	ZN-34002-SST	41	ZN-38205-SIL	45
ZN-29184-BLK	69	ZN-34003-BLK	41	ZN-38354-BLK	44
ZN-29185-WHT	121	ZN-34018-SBLK	21	ZN-38354-SIL	44
ZN-29186-WHT	123	ZN-34018-SST	21	ZN-38599-BLK	122
ZN-29187-WHT	123	ZN-34019-ANTH	38	ZN-38600-WHT	122
ZN-29189-ATR	35	ZN-34019-BLK	38	ZN-38602-BLK	50
ZN-29190-ATR	35	ZN-34019-WHT	38	ZN-38603-BLK	42
ZN-29347-Anth	39	ZN-34020-ANTH	38	ZN-38605-BLK	59
ZN-29347-BLK	39	ZN-34020-BLK	38	ZN-38605-WHT	59
ZN-29347-POLALU	0	ZN-34020-WHT	38	ZN-38606-BLK	59
ZN-29347-SIL	39	ZN-34022-BLK	14	ZN-38606-WHT	59
ZN-29992-BLK	32	ZN-34022-SST	14	ZN-38614-BLK	65
ZN-29993-BLK	26	ZN-34042-ANTH	35	ZN-38614-SST	65
ZN-29995-BLK	24	ZN-34043-ANTH	35	ZN-38615-BLK	64
ZN-29996-BLK	24	ZN-34044-BLK	78	ZN-38615-SST	64
ZN-29997-BLK	70	ZN-34555-BLK	33	ZN-38616-BLK	65
ZN-31385	86	ZN-34555-SST	33	ZN-38616-SST	65
ZN-31386	86	ZN-34870	87	ZN-38620-BLK	51
ZN-31757-ANTH	53	ZN-35072-BLK	11	ZN-38621-ANTH	28
ZN-31757-DOVG	53	ZN-35593-BLK	37	ZN-38621-BLK	28
ZN-31757-IVO	53	ZN-35594-BLK	37	ZN-38621-WHT	28
ZN-31757-MINT	53	ZN-35685-BLK	37	ZN-38622-ANTH	29
ZN-31757-PBLU	53	ZN-35686-BLK	37	ZN-38622-BLK	29
ZN-31758-ANTH	31	ZN-35687-BLK	80	ZN-38622-WHT	29
ZN-31758-SIL	31	ZN-35687-DGRY	80	ZN-38623-ANTH	27
ZN-31759-ANTH	31	ZN-35687-WHT	80	ZN-38624-ANTH	27
ZN-31759-SIL	31	ZN-35688-BLK	81	ZN-38627-BLK	80
ZN-31765-BLK	39	ZN-35688-DGRY	81	ZN-38627-DGRY	80
ZN-31767-BLK	27	ZN-35688-WHT	81	ZN-38627-WHT	80
ZN-31768-BLK	27	ZN-35689-BLK	79	ZN-38628-BLK	81
ZN-31787-WHT	116	ZN-35690-WHT	114	ZN-38628-DGRY	81
ZN-31805-WHT	121	ZN-35691-BLK	114	ZN-38628-WHT	81
ZN-31807-TBLK	58	ZN-35738-BLK	70	ZN-38630-BLK	59
ZN-31808-POLSST	56	ZN-35739-BLK	22	ZN-38631-BLK	26
ZN-31809-DOVG	56	ZN-35740-BLK	22	ZN-38634-BLK	23
ZN-31809-IVO	56	ZN-35741-BLK	25	ZN-38636-ANTH	32
ZN-31809-MINT	56	ZN-37052-BLK	136		
ZN-31809-PBLU	56	ZN-37938-ANTH	16		
ZN-31809-SST	56	ZN-37938-BLK	16		
ZN-32069-BLK	42	ZN-37938-COP	16		
ZN-32070-ANTH	49	ZN-37938-SST	16		
ZN-32070-BLK	49	ZN-37938-WHT	16		
ZN-32255-BLK	11	ZN-37939-ANTH	15		
ZN-33394-BLK	67	ZN-37939-BLK	15		

INDEX (ALPHABETICAL)

ZN-38636-WHT	32	ZN-41102-BRNZ	6	ZN-42229	149
ZN-38637-BLK	23	ZN-41102-RBRS	6	ZN-42263	74
ZN-38640-MBLK	43	ZN-41106	74	ZR-32297-BLK	95
ZN-38641-MBLK	43	ZN-41711-CRYSMK	10	ZR-32298-BLK	91
ZN-38688-BLK	84	ZN-41732	72	ZR-32299-BLK	93
ZN-38689-BLK	84	ZN-41733	72	ZR-32300-BLK	107
ZN-38690-BLK	84	ZN-41734	73	ZR-32301-BLK	103
ZN-38691-BLK	84	ZN-41735	73	ZR-32302-BLK	90
ZN-38692-BLK	84	ZN-41736	71	ZR-32328-BLK	104
ZN-38694-BLK	85	ZN-41737	71	ZR-37441-BLK	106
ZN-38695-BLK	85	ZN-41738	71/72/73	ZR-37442-CMTL	109
ZN-38696-BLK	85	ZN-41739	71/72/73	ZR-37443-BLK	101
ZN-38863	112	ZN-42019-COP	9	ZR-37444-BLK	105
ZN-38864	112	ZN-42019-SST	9	ZR-37445-BLK	111
ZN-38865	112	ZN-42031	127	ZR-37448-BLK	110
ZN-38866	113	ZN-42032	127	ZR-38155-SIL	89
ZN-38867	113	ZN-42033	129	ZR-38156-BLK	100
ZN-38868	113	ZN-42034	129	ZR-38529-SIL	98
ZN-38869	113	ZN-42035	131	ZR-38532-SIL	97
ZN-38870	112	ZN-42037	137	ZR-38831-SIL	97
ZN-38871	113	ZN-42039	132	ZR-38833-BLK	99
ZN-39171-ANTH	62	ZN-42040	133	ZR-38834-BLK	99
ZN-39171-BLK	62	ZN-42041	133		
ZN-39172-ANTH	62	ZN-42042	138		
ZN-39172-BLK	62	ZN-42043	130		
ZN-39173-ANTH	63	ZN-42044	130		
ZN-39173-BLK	63	ZN-42045	134		
ZN-39742-BLK	82	ZN-42046	134		
ZN-39746-BLK	82	ZN-42047	134		
ZN-39998-BLK	64	ZN-42048	135		
ZN-39998-SST	64	ZN-42049	135		
ZN-40001-ANTH	7	ZN-42050	143		
ZN-40001-BLK	7	ZN-42051	141		
ZN-40002-ANTH	48	ZN-42052	141		
ZN-40002-BLK	48	ZN-42053	141		
ZN-40002-SIL	48	ZN-42054	140		
ZN-40004-BLK/BRS	40	ZN-42055	140		
ZN-40004-BLK/SST	40	ZN-42056	139		
ZN-40063	76	ZN-42057	145		
ZN-40064	76	ZN-42058	146		
ZN-40065	77	ZN-42059	147		
ZN-40066	77	ZN-42060	148		
ZN-41099-CRYSMK	10	ZN-42066-BLK	8		
ZN-41100-CRYSMK	10	ZN-42095-BLK	8		
ZN-41101-BRNZ	6	ZN-42097-BLK	68		
ZN-41101-RBRS	6	ZN-42098-BLK	68		

NOTES

